

BZE6-2RN62

M

DRAWING
NUMBER

11

ISSUE

REPLACES

RELEASE NO.

22 NOV 05

BP

CHECK

77

25 AUG 77

13 APR 84

8 NOV 84

8 NOV 84

7 JAN 85

4 SEP 92

17 FEB 94

20 SEP 94

22 NOV 05

23 AUG 77


25 AUG 77

25 AUG 77

25 AUG 77

25 AUG 77


25 AUG 77

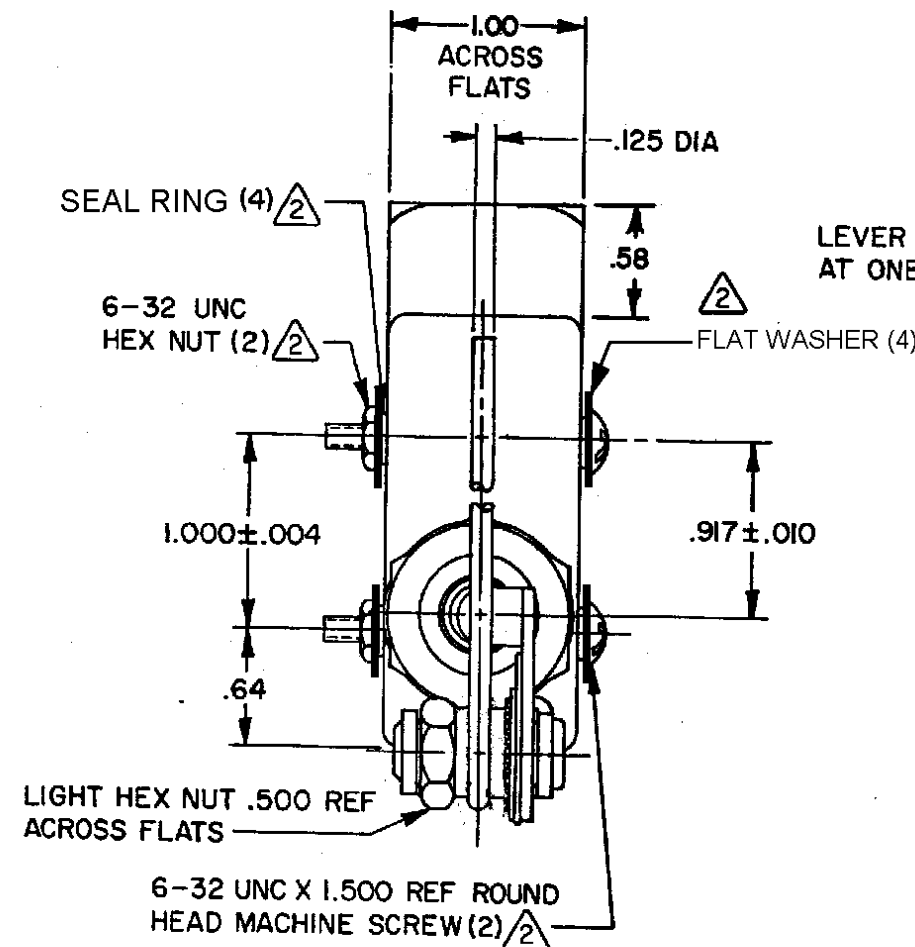

HEX SEAL NUT .938 REF ACROSS FLATS

ELASTOMER PLUNGER SEAL SECURED TO
COMPONENTS BY EXTERNAL BANDING

LEVER IS SHOWN IN ITS FREE POSITION
AT ONE EXTREME OF ITS ADJUSTABLE RANGE-

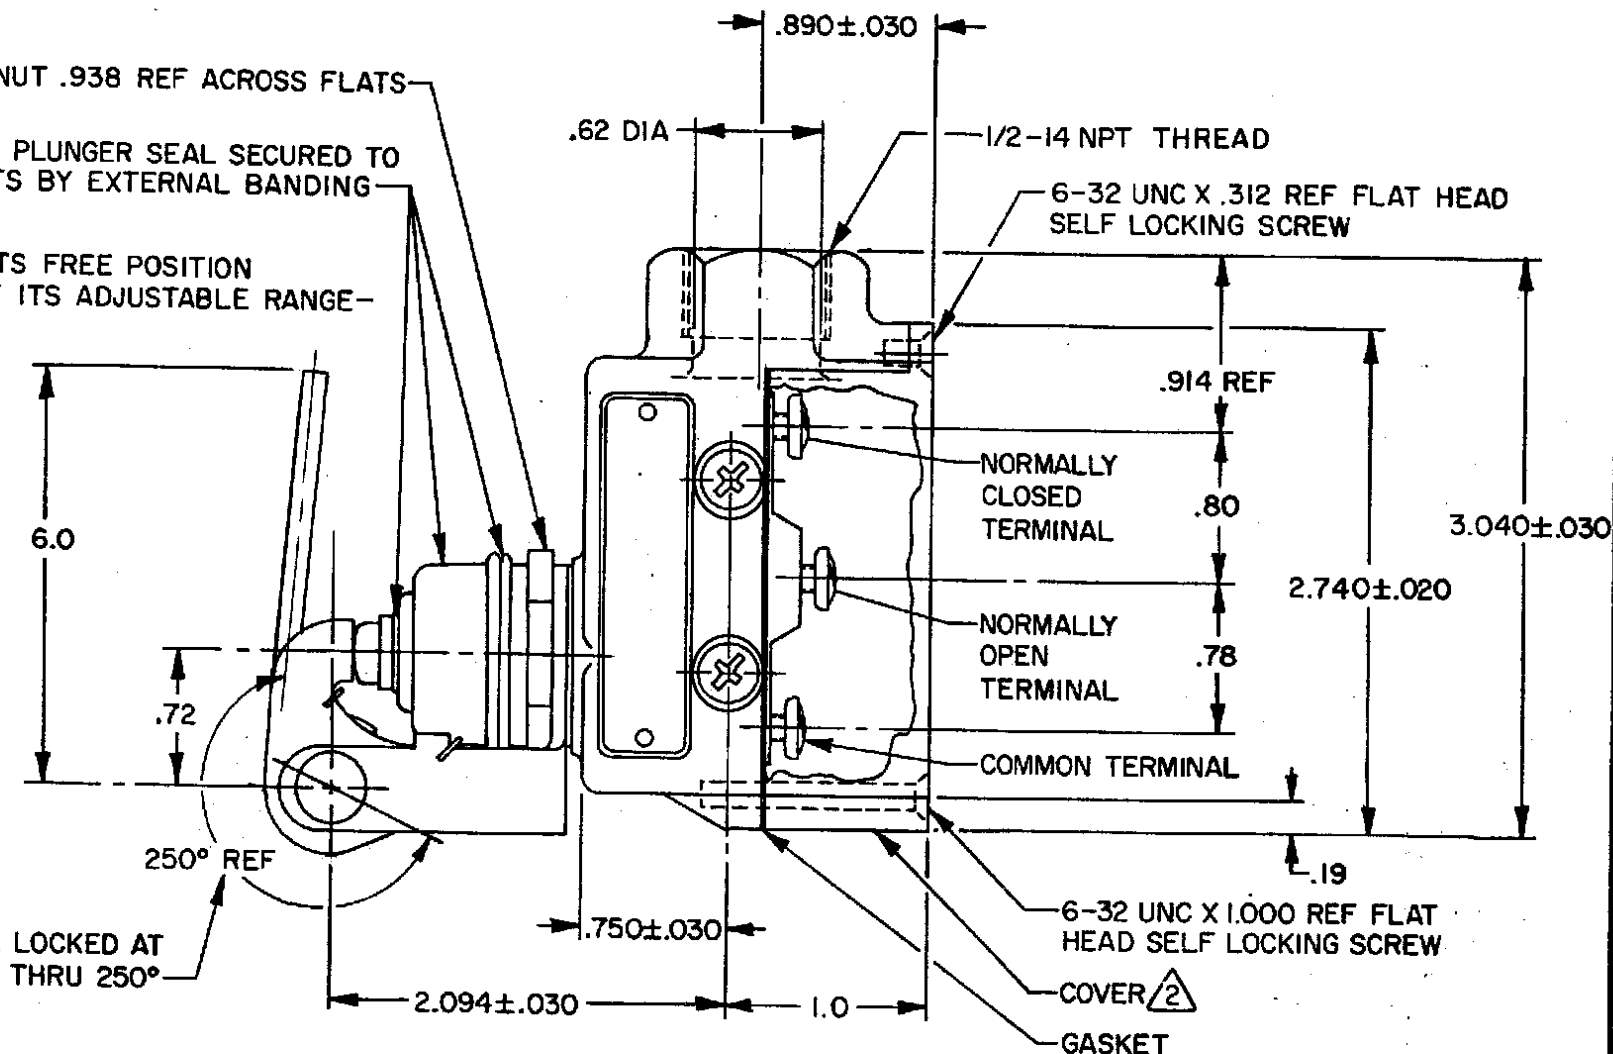

LEVER MAY BE LOCKED AT
ANY POSITION THRU 250°

NOTES-

- ① - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- ② - FURNISHED UNASSEMBLED
- ③ - LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND
AXIS OF PLUNGER
- ④ - SEAL RATING: NEMA1,3
IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF
HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — 3-7 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — — — 1 OZ MIN		UNLESS OTHERWISE NOTED
PRETRAVEL — — — .718 MAX	15A-125, 250 OR 480 VAC, 2A-600 VAC	DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — — .229 MAX	1/8 HP-125 VAC; 1/4 HP-250 VAC	TOLERANCES ARE:
OVERTRAVEL — — — .838 MIN	1/2A-125 VDC; 1/4A-250 VDC	ONE PLACE (.0) ±.030
BASIC SWITCH REPLACEMENT — BZ-2RN702	CODE L74	TWO PLACE (.00) ±.015
	CE 1.5A, 240Vac	THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT .71 LB