

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91828

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RQ2-S

BZE6-2RQ2-S

M

DRAWING
NUMBER

2

5

ISSUE

2

5

PSR

29AUG07

CHECK

29AUG07

REVISIONS

A C072618

L J F

11 SEP 92

B C081513B

J A K

4 MAR 97

C 0016894

KRB

10 NOV 05

D 0033014

BS

29AUG07

CHECK

29AUG07

CHECK

29AUG07

CHECK

29AUG07

CHECK




29AUG07

CHECK

29AUG07

CHECK

29AUG07

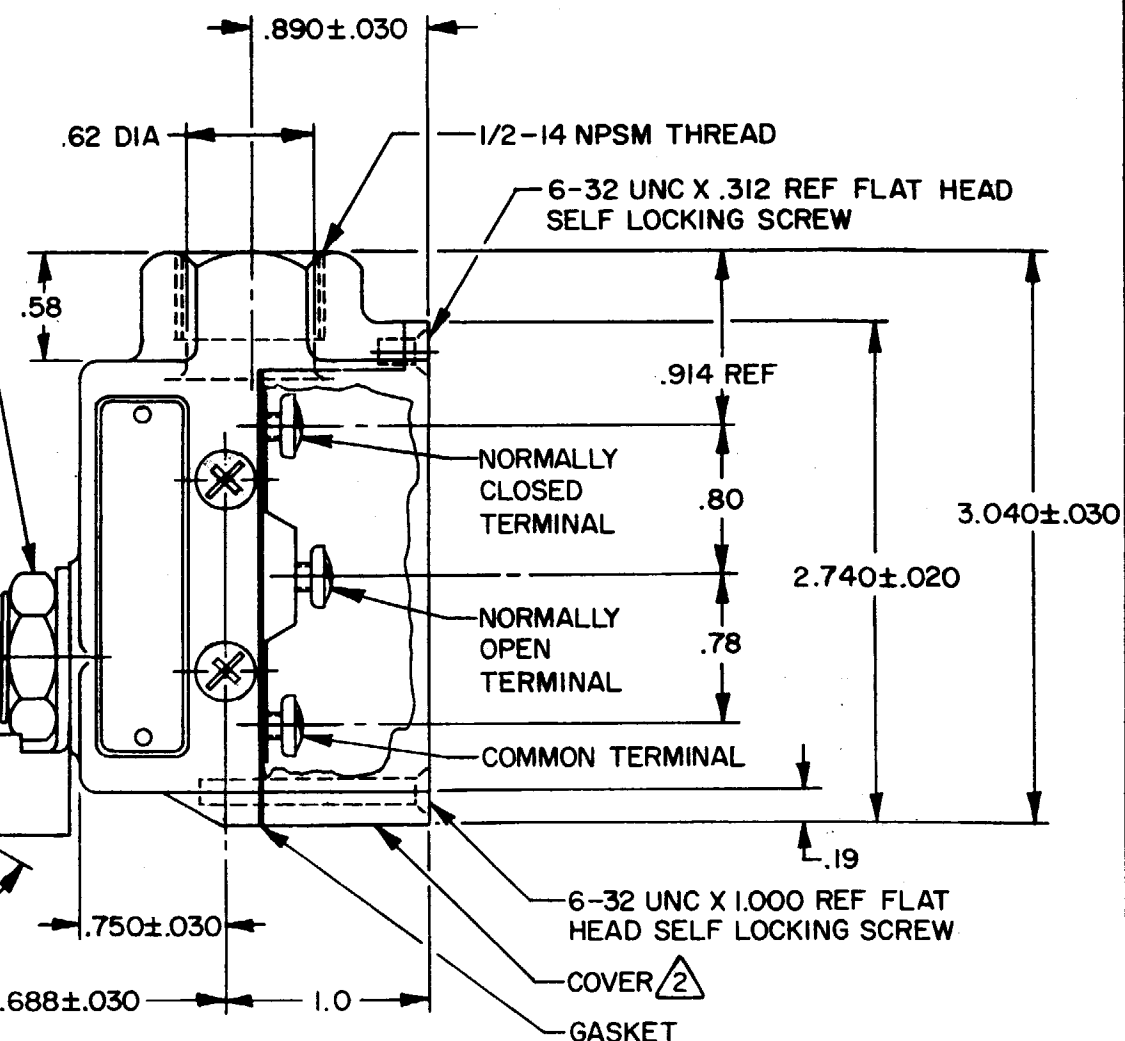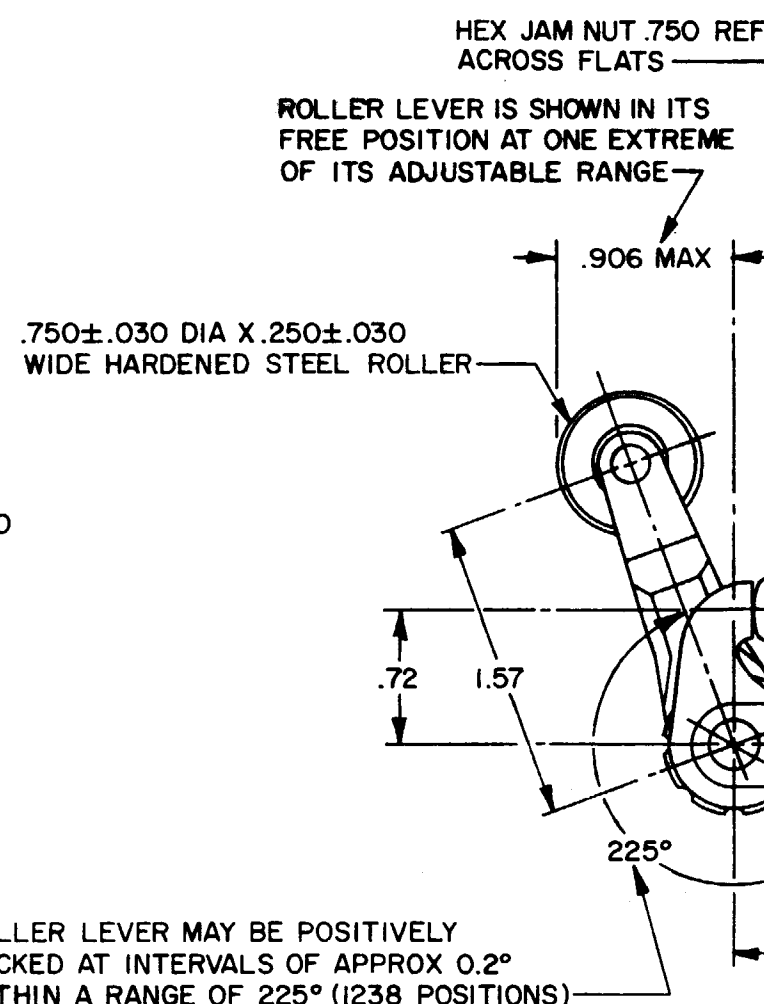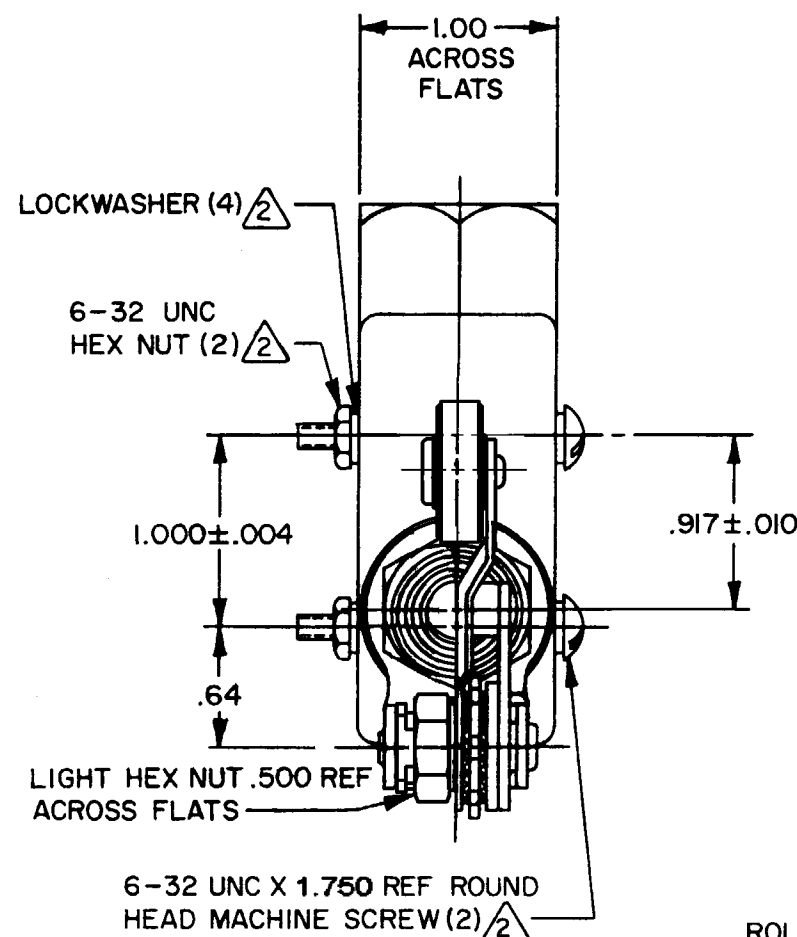

NOTES

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- 2 - FURNISHED UNASSEMBLED
- 3 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY ONE OF EIGHT POSITIONS SPACED 45° APART
- 4 - SEAL RATING: NEMA1 IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 10-18 OZ
RELEASE FORCE ----- 6 OZ MIN
PRETRAVEL ----- .188 MAX
DIFFERENTIAL TRAVEL ----- .006 MAX
OVERTRAVEL ----- .219 MIN
BASIC SWITCH REPLACEMENT ----- BZ-2RQ68

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T
L74
15A 125, 250, OR 480VAC 2A 600 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

CE 1.5A, 240 Vac

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES

WEIGHT .70 LB

RASTER
DRAWN

TSK 3 DEC 85