

BZLN-RH

M

DRAWING
NUMBER

88

88

ISSUE

1011

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO19597	M B F	5 NOV 84
B	CO50714	G J W	27 APR 82
C	CO55988	M A M	31 OCT 84
D	CO-81715	J A K	26 SEP 95

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK

FORMTEK

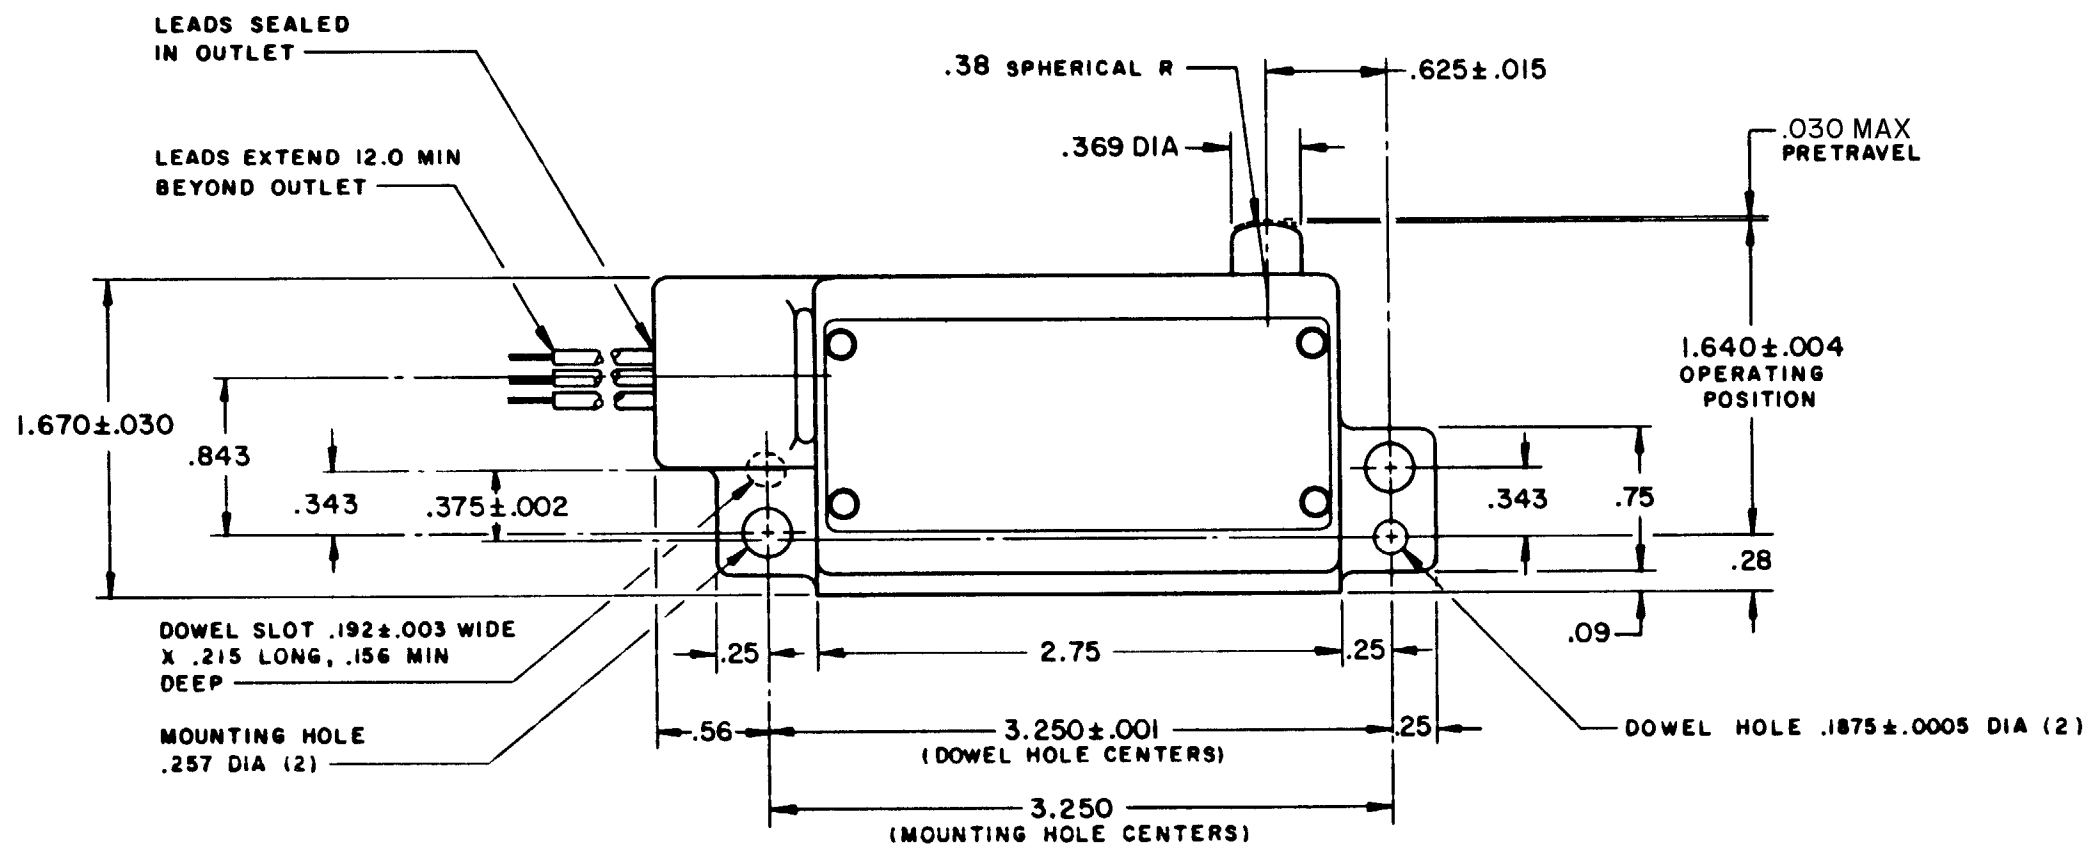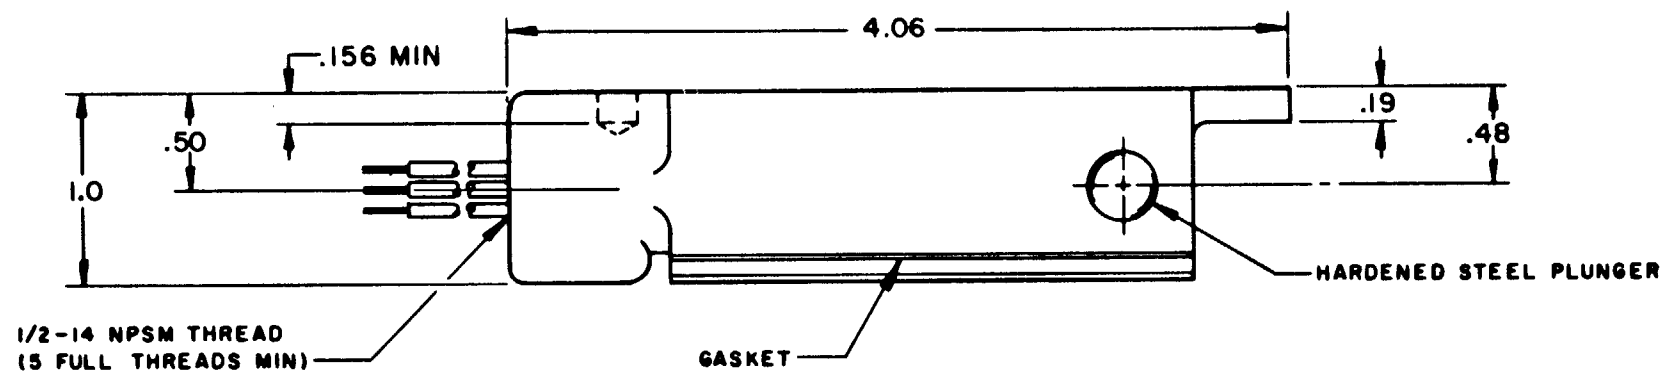

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — 5 LB MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — — — — 1 LB MIN	- L96- 15 A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC 1/8 HP-125 VAC; 1/4 HP-250 VAC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
DIFFERENTIAL TRAVEL — — — .004 MAX		WEIGHT .720 LB PLUS LEADS
OVERTRAVEL — — — — .203 MIN		

WIRING CONNECTIONS—
COMMON - BLACK LEAD
NORMALLY OPEN - BLUE LEAD
NORMALLY CLOSED - RED LEAD