


HONEYWELL
PART NUMBER
BZV6-2RN-C

REV	DOCUMENT	CHANGED BY	CHECK
2	0081896	NMN 21SEP11	CMH

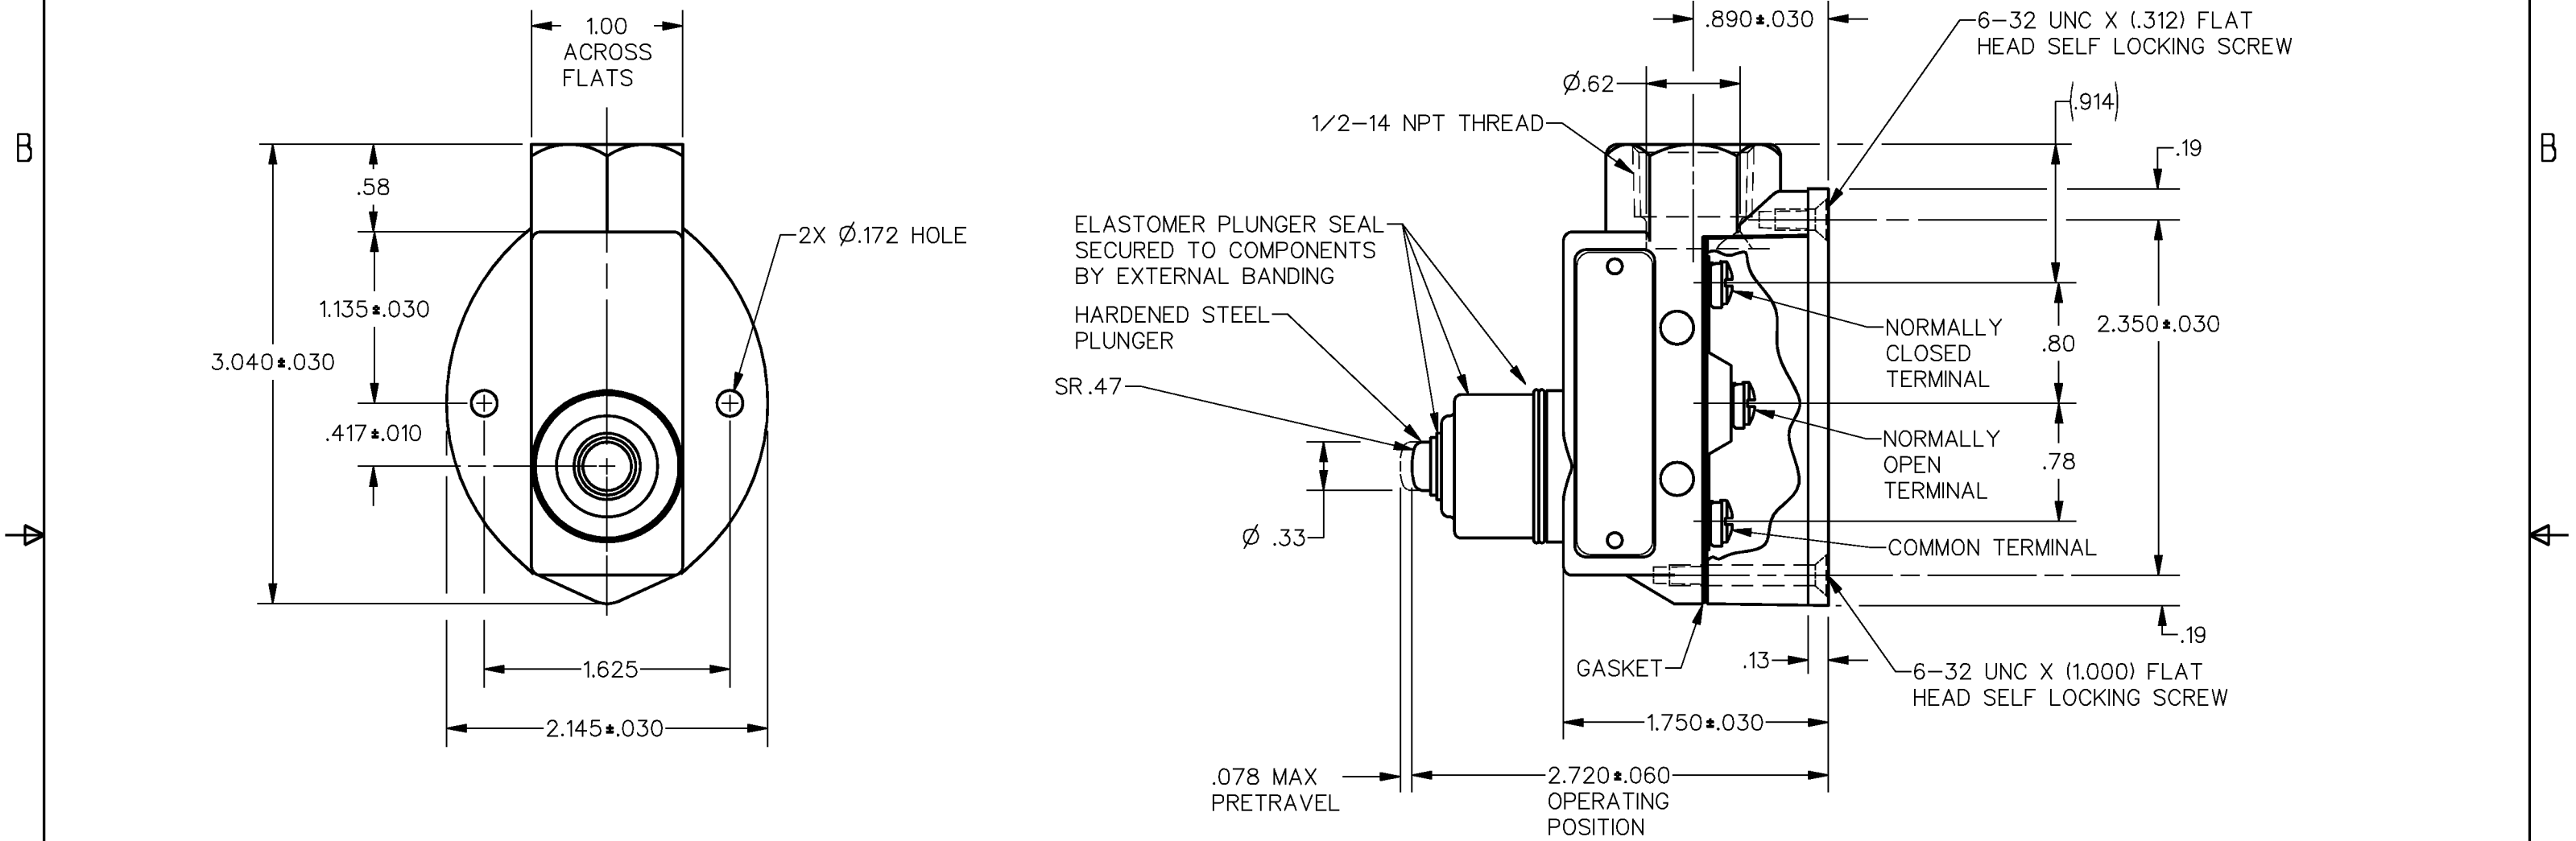

NOTES

- 1 - 3X 6 - 32 UNC X (.219) BINDING HEAD TERMINAL SCREW AND CUP WASHER
- 2 - SEALED FOR NEMA 1, 3, 4 AND IP 66 RATING

RELEASE NO: PR - 23063

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN	GLH	8JAN98	Honeywell				
OPERATING FORCE----- 9-24 OZ		CONTACT ARRANGEMENT S P D T				CHECK	GLH	8JAN98					
RELEASE FORCE----- 4 OZ MIN		15A-125, <u>250</u> OR 480 VAC,2A-600 VAC -L74- 1/8 HP - 125 VAC;1/4 HP - <u>250</u> VAC 1/2A - 125 VDC; 1/4A-250 VDC CE 1.5A, 240VAC SE RU		NO PLACES X ± .030		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - ENCLOSED				
DIFFERENTIAL TRAVEL----- .002 MAX				ONE PLACE .X ± .015									
OVERTRAVEL----- .219 MIN				TWO PLACE .XX ± .005									
SWITC-BASIC REPLACEMENT----- BZ-2RQ77						THREE PLACE .XXX ± .005		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	CAGE CODE
				ANGLES X ± 0°		B	I				-	BZV6-2RN-C	2
				THIRD ANGLE PROJECTION 		RASTER			SCALE	NONE	WEIGHT .62 LB	SHEET 1	OF 1