


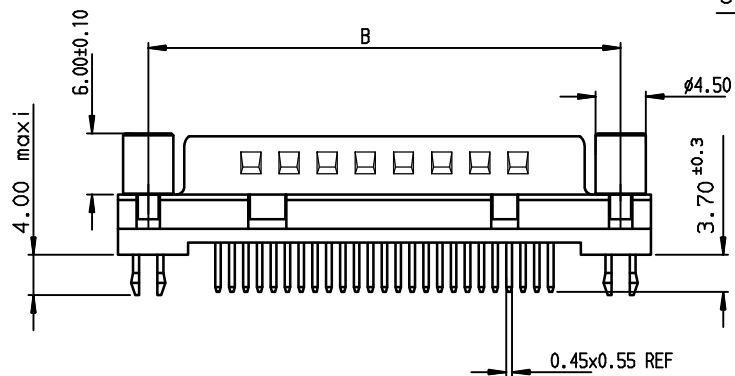


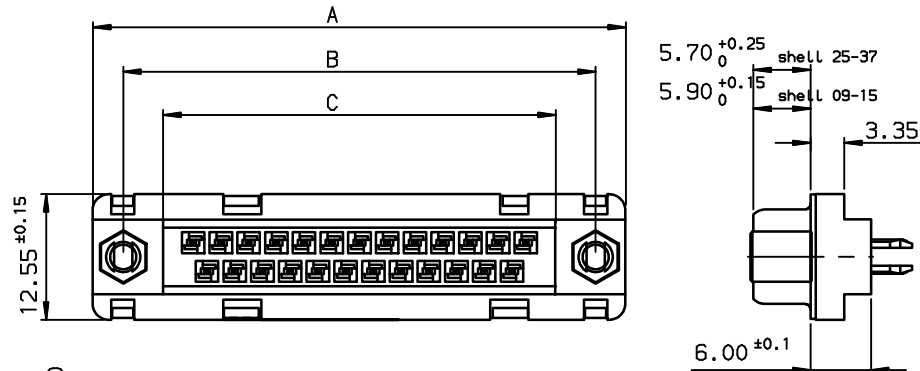

Copyright FCI.

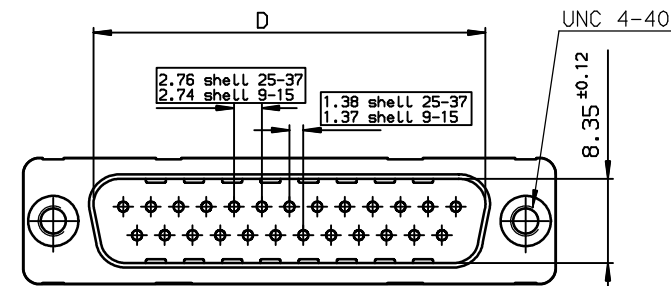

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

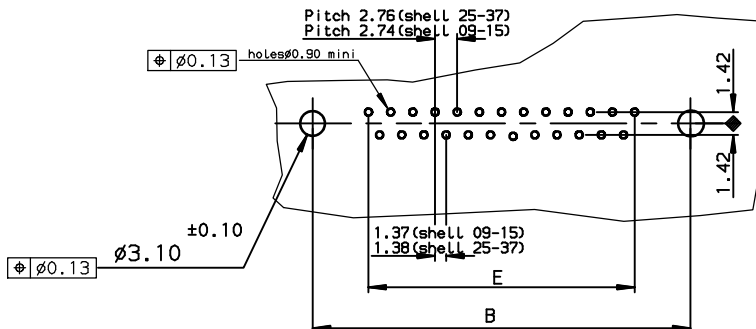

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B6GV00
15	39.14	33.32	25.18	25.12	19.18	D15P24B6GV00
25	53.03	47.04	39.12	38.84	33.12	D25P24B6GV00
37	69.32	63.50	55.68	55.30	49.68	D37P24B6GV00
37	69.32	63.50	55.68	55.30	49.68	D37P24B4GV00

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B6GV00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24B6GV00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24B6GV00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B6GV00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B4GV00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com			surface ISO 1302 ✓		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	LELEON	1992/09/14	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2			
Eng	PESSON	1992/09/14			0.XX	±0.1		ECN LS06-0097			
Chr	LEGARE	1992/09/14			0.XX' ±2'	0.XXX			±0.1		
Appr	LEGARE	1992/09/14	Product family				D-SUB	Spec ref -			
			title MALE CONNECTOR DELTA D ST straight,solder type for				dwg no C01-8646-0107			Rev G	
catalog no			-				CUSTOMER			sheet 1 of 1	

REV F - 2006-04-17

PDM: Rev:G

STATUS:Released

Printed: Jan 18, 2011