
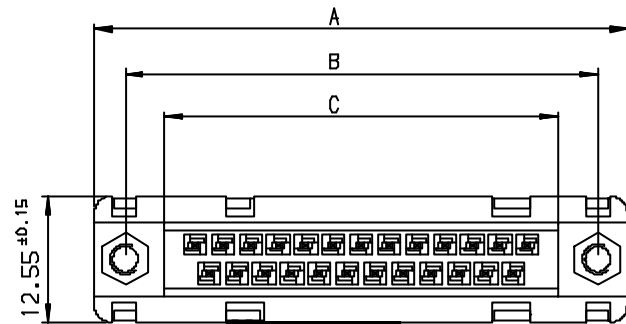


PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

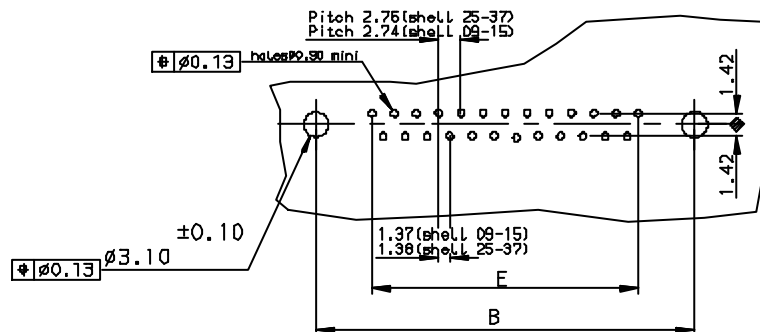

GENERAL CHARACTERISTICS AND ROHS INFORMATION:
SEE DRAWING C01-8646-0000

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24B.PL00
15	39.14	33.32	25.18	24.54	19.18	D15S24B.PL00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24B.PL00
37	69.32	63.50	55.68	54.71	49.68	D37S24B.PL00

Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24B.PL00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24B.PL00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24B.PL00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24B.PL00LF

Plating: 4 --> flash AU
Plating: 5 --> 0.75µ AU

European Views

www.fciconnect.com			surface ISO 1302 ✓		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	LELEON	1992/09/16	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2			
Eng	PESSON	1992/09/16			0.XX	±0.1					
Chr	LEGARE	1992/09/16			0.XXX	±0.1					
Appr	LEGARE	1992/09/16	Product family		D-SUB		ECN L505-0095 Spec ref -				
			FEMALE CONNECTOR STD EUROPE					2 Dwg C01-8646-0121		Rev. D	
			straight solder type for PCB 2.40mm								
			catalog no -					CUSTOMER		sheet 1 of 1	

rev	con no	dr	date
B	-	JOU	1996/03/08
C	L505-001	NPE	2005/03/10
D	L505-0095	LGO	2006/05/19
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-