



Copyright FCI.

A

B




C

D

2

3

4

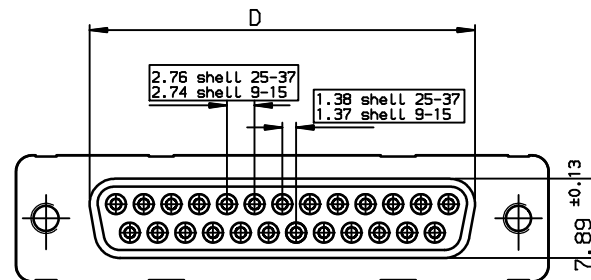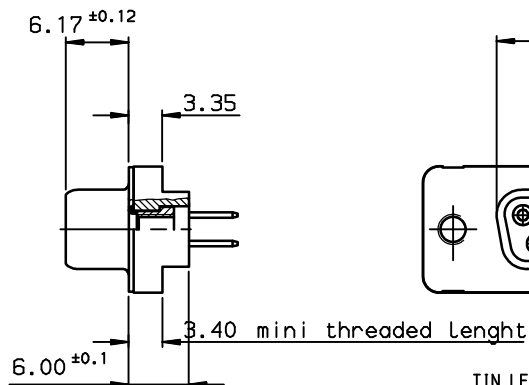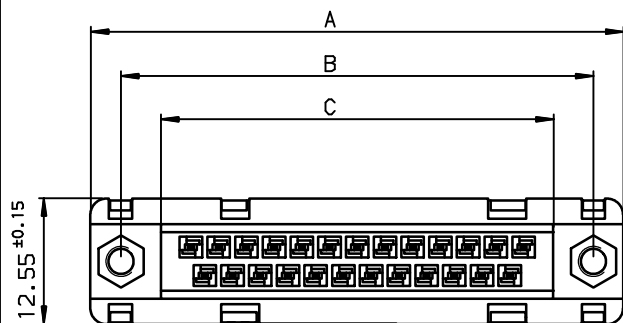

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24B.PX00
15	39.14	33.32	25.18	24.54	19.18	D15S24B.PX00
25	53.03	47.04	39.12	38.25	33.12	D25S24B.PX00
37	69.32	63.50	55.68	54.71	49.68	D37S24B.PX00

Plating: 4 --> flash AU

Plating: 6 --> 0.76μ AU


LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24B.PX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24B.PX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24B.PX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24B.PX00LF

Plating: 4 --> flash AU

Plating: 6 --> 0.76μ AU

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

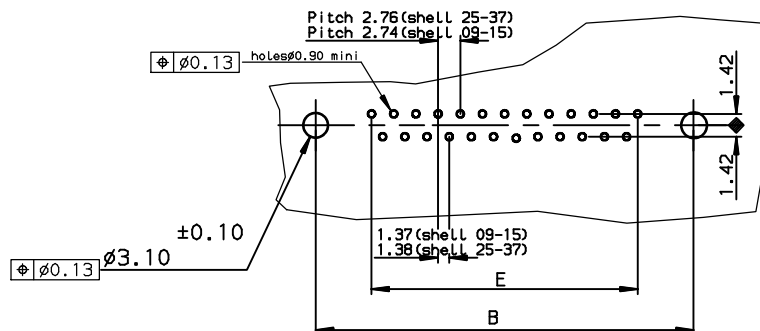

GENERAL CHARACTERISTICS AND ROHS INFORMATION:

SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com			surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	LELEON	1992/09/16	ANGULAR	0.X	±0.1
Eng	PESSON	1992/09/16		0.XX	±0.1
Chr	LEGARE	1992/09/16		0.XXX	±0.1
Appr	LEGARE	1992/09/16	Product family		D-SUB
			Spec ref		-
			title		Rev.
			FEMALE CONNECTOR STD EUROPE		D
			straight solder type for PCB 2.40mm		
			catalog no		
			C01-8646-0122		
			CUSTOMER		sheet 1 of 1

REV F - 2006-04-17

PDM: Rev:D

STATUS:Released

Printed: Jan 18, 2011