

A

B

C




D

A



B

C

D

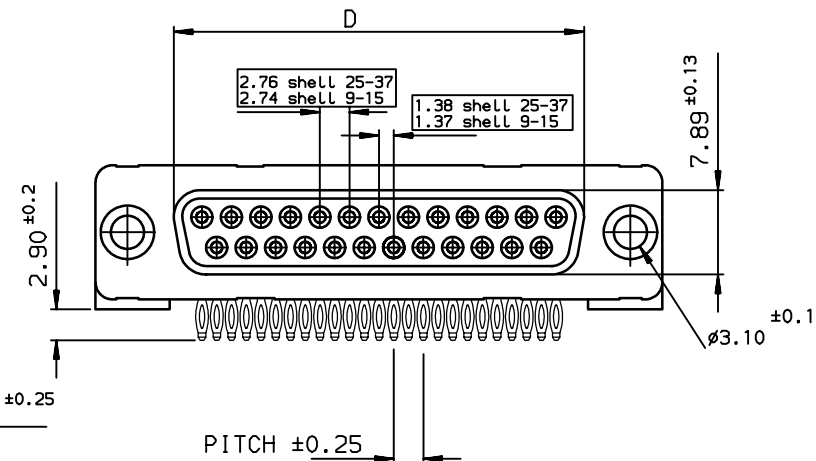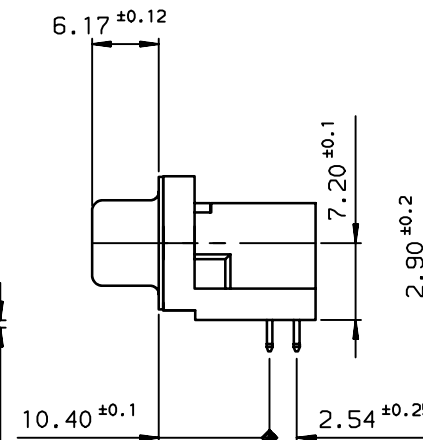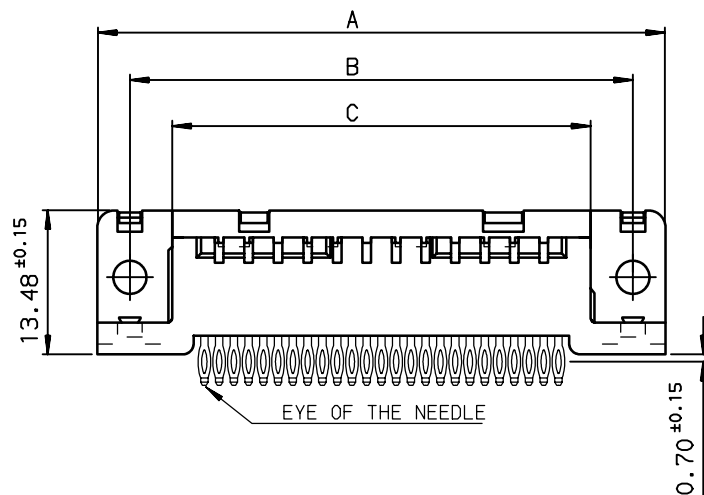

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.20)

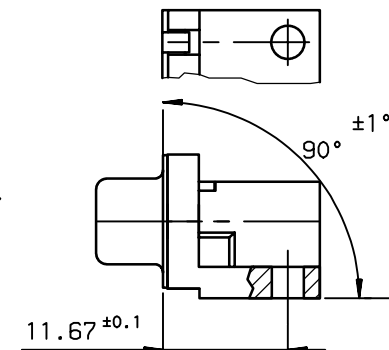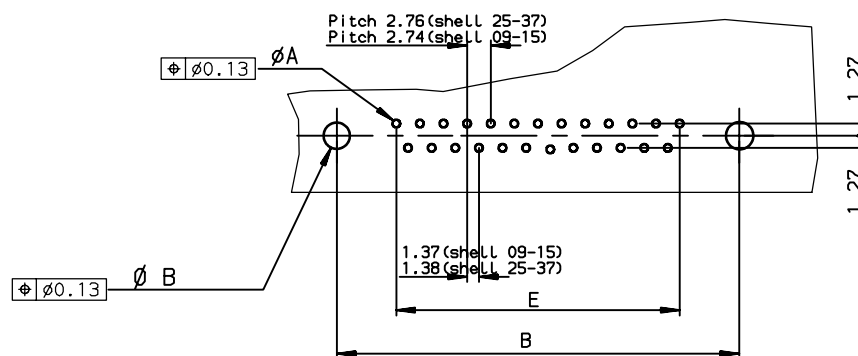

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	--
15	39.14	33.32	26.32	24.54	19.18	--
25	53.03	47.04	40.04	38.25	33.12	D25S81C6BA00
37	69.32	63.50	56.50	54.71	49.68	--

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	--
15	39.14	33.32	26.32	24.54	19.18	--
25	53.03	47.04	40.04	38.25	33.12	D25S81C6BA00LF
37	69.32	63.50	56.50	54.71	49.68	--

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 				
			TOLERANCES UNLESS OTHERWISE SPECIFIED										
Dr	PESSON	1993/06/28	ANGULAR		LINEAR		0.X		±0.1		size A3	Scale 2	
Eng	PESSON	1993/06/28					0.XX		±0.1				
Chr	LEGARE	1993/06/28					0.XXX		±0.1				
Appr	LEGARE	1993/06/28	0.XX' ±2°				ECN		LS06-0140				
			Product family					D-SUB		Spec ref -			
			FEMALE CONNECTOR DELTA D STD EUROPE					dwg no		C01-8646-0172		Rev.	
			right angled press fit									6	
			catalog no					-		CUSTOMER		sheet 1 of 1	