

1

2

3

4

A

A

B





B

C


C

D

D

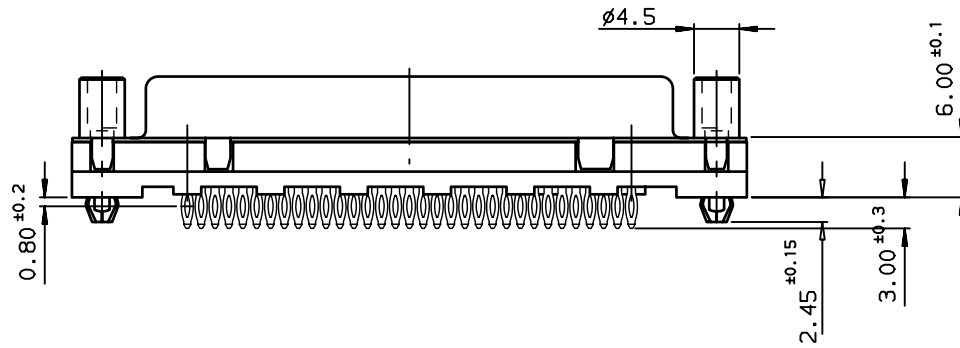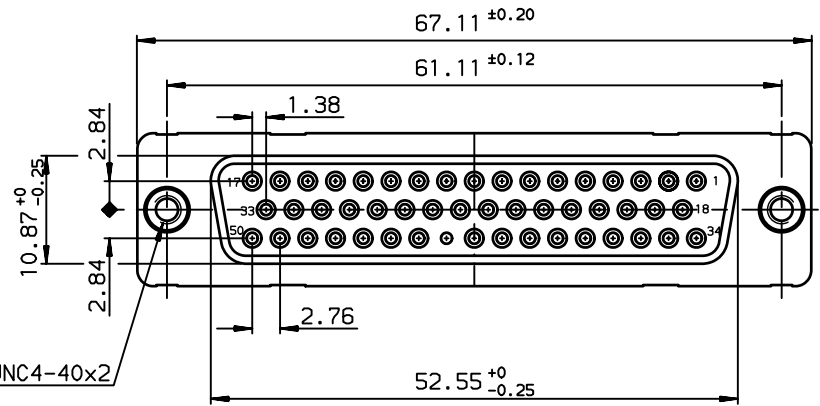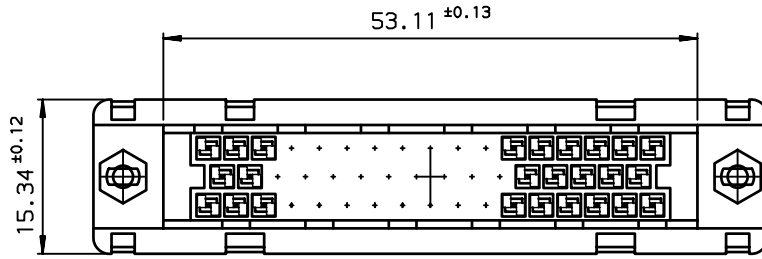

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

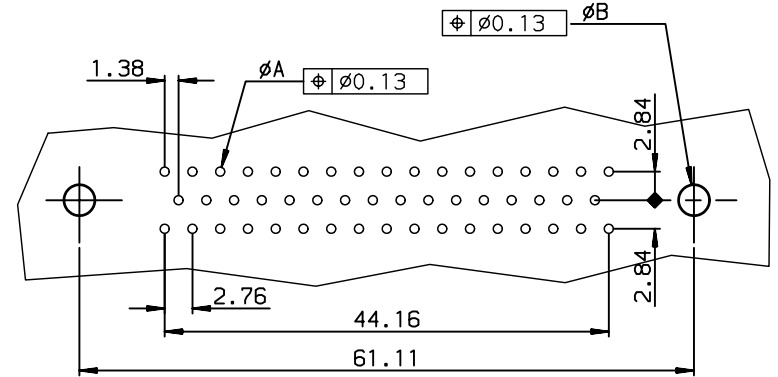

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S91C4GV00
0.76µ gold	D50S91C6GV00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S91C4GV00LF
0.76µ gold	D50S91C6GV00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

European Views

rev	ecn no	dr	date
D	-	LEN	1996/07/25
E	LS05-004	MPE	2005/02/08
F	LS06-0095	LGO	2006/06/28
G	LS06-0140	LGO	2006/29/03
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	mm	
			TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	LENOIR	1994/06/24	ANGULAR LINEAR	0.X	±0.1	size A3	Scale 2
Eng	PESSON	1994/06/24		0.XX	±0.1		
Chr	LEGARE	1994/06/24		0.XXX	±0.1		
Appr	LEGARE	1994/06/24	Product family			ECN	LS06-0140
			D-SUB			Spec ref	-
			title			dwg no	Rev.
			FEMALE CRS DELTA D			C01-8646-0258	G
			50 EUROPE straight PF 4-40 screw			CUSTOMER sheet 1 of 1	
			catalog no				

REV F - 2006-04-17

1

2

3

4