

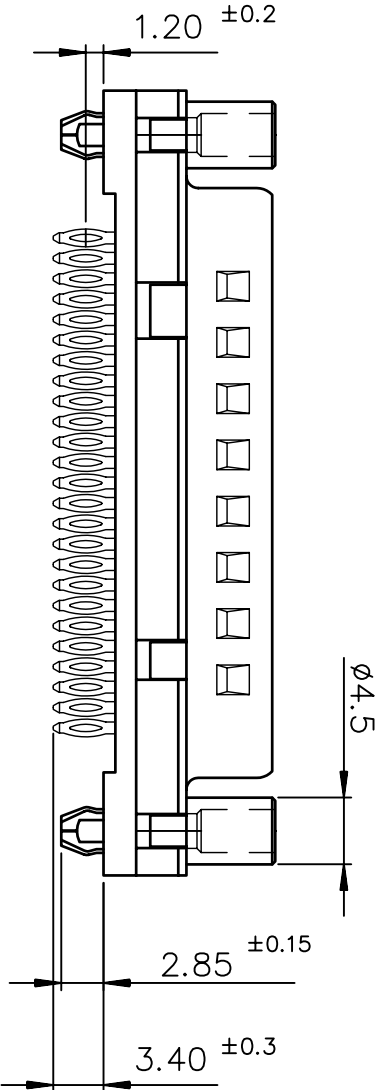
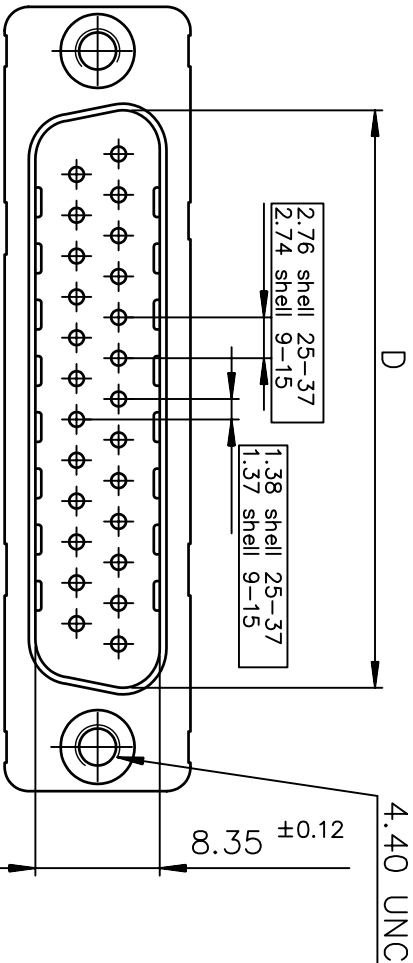
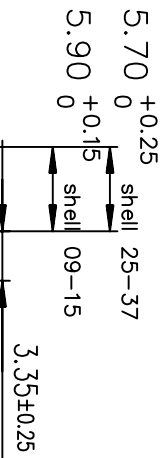


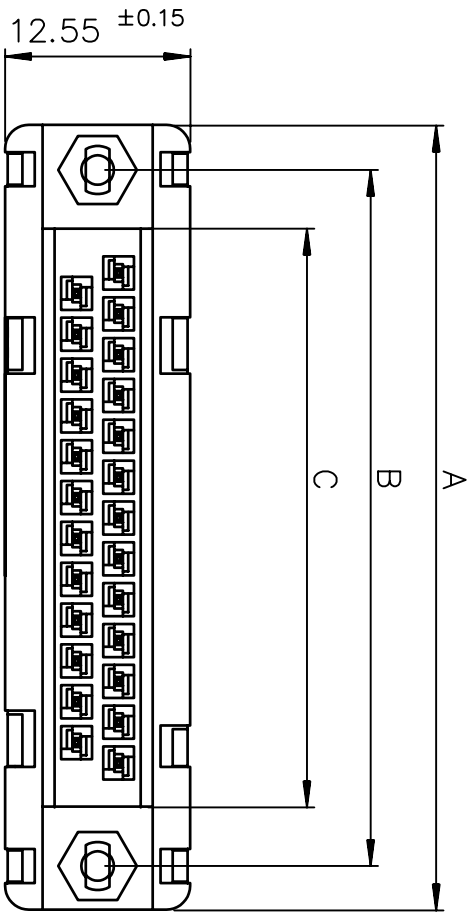

PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

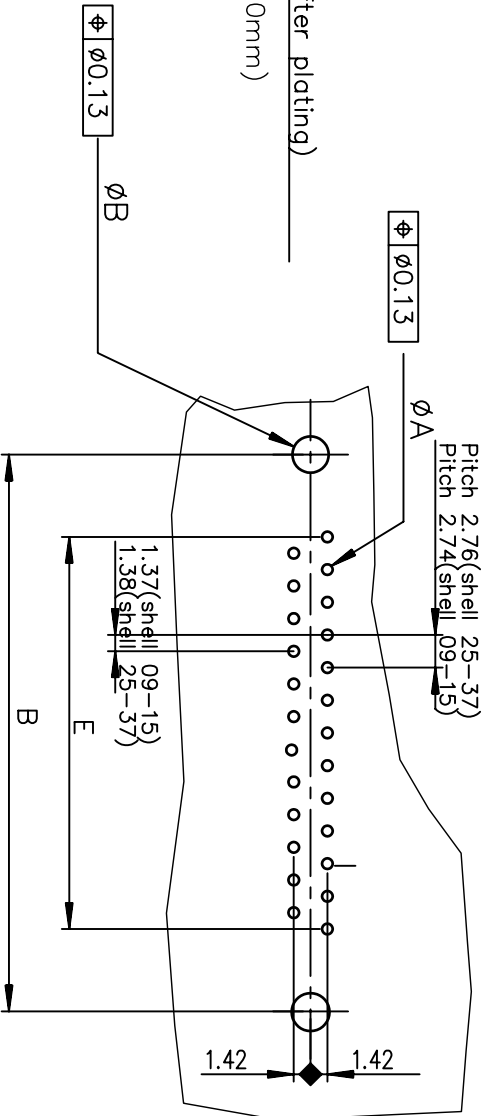

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P90C4GV00	D09P90C6GV00
15	39.14	33.32	25.18	25.12	19.18	D15P90C4GV00	D15P90C6GV00
25	53.03	47.04	39.12	38.84	33.12	D25P90C4GV00	D25P90C6GV00
37	69.32	63.50	55.68	55.30	49.68	D37P90C4GV00	D37P90C6GV00

gold flash

0.76» gold

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P90C4GV00LF	D09P90C6GV00LF
15	39.14	33.32	25.18	25.12	19.18	D15P90C4GV00LF	D15P90C6GV00LF
25	53.03	47.04	39.12	38.84	33.12	D25P90C4GV00LF	D25P90C6GV00LF
37	69.32	63.50	55.68	55.30	49.68	D37P90C4GV00LF	D37P90C6GV00LF

gold flash

0.76» gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

www.fciconnect.com				surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
				ISO 1302	✓	ISO 406	ISO 1101	ISO 1101	projection	mm
				tolerances unless otherwise specified						

rev	ecn no	dr	date
B	-	JAR	1996/07/24
C	LS05-004	MPE	2005/02/08
D	LS06-0097	LGO	2006/07/29
E	LS06-0140	LGO	2006/09/16
F	109-0268	NG	2009-11-24

	title		Rev.	
	MALE CONNECTOR DELTA LOW PROFIL		F	
	straight press—fit			
catalog no	—		dwg no	
	CUSTOMER		C01—8646—0371	
	sheet	1 of 1		

MALE CONNECTOR DELTA LOW PROFIL	straight press-fit	Rev.	F
MALE CONNECTOR DELTA LOW PROFIL	straight press-fit	Rev.	F



Copyright FCI.