
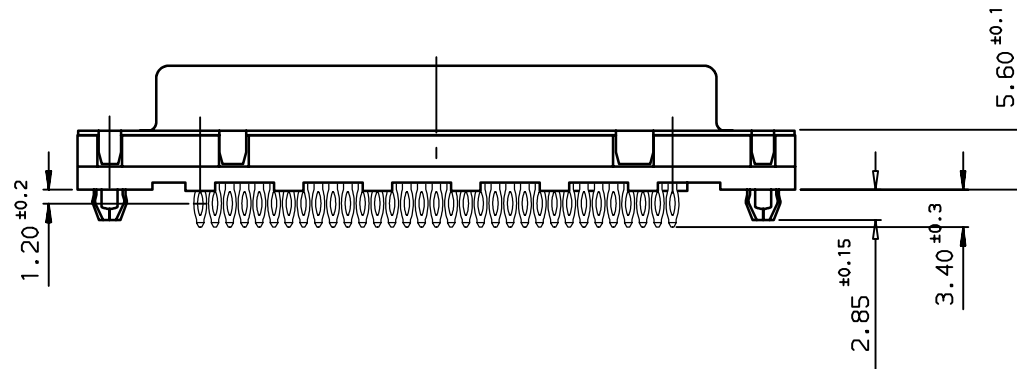


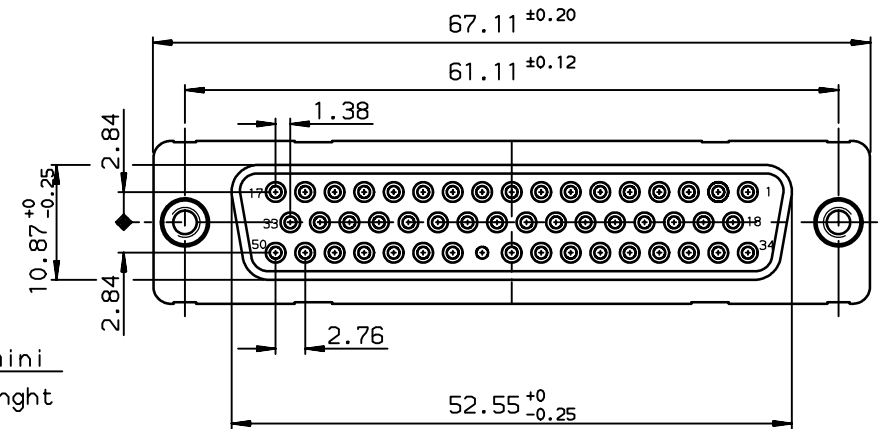

The drawing shows a mechanical part with a top view and a cross-section view. The top view is a rectangle with a width of 61.16 and a height of 2.76. It features a central rectangular area with a width of 44.16 and a height of 2.84. This central area contains a grid of 10 rows and 10 columns of small circles, representing holes. The distance from the left edge to the first column of holes is 1.38. The distance from the right edge to the last column of holes is 2.84. The distance from the bottom edge to the first row of holes is 2.76. The distance from the top edge to the last row of holes is 2.84. The cross-section view shows a circular profile with a diameter of $\varnothing 0.13$. The distance from the center of the circle to the right edge is labeled $\varnothing B$. The distance from the center of the circle to the left edge is labeled $\varnothing A$. The distance from the center of the circle to the top edge is labeled $\varnothing 0.13$. The distance from the center of the circle to the bottom edge is labeled $\varnothing 0.13$.

PART NUMBER	
flash gold	D50S90C4GX00
0.76μ gold	D50S90C6GX00

PART NUMBER	
Flash gold	D50S90C4GX00LF
0.76 μ gold	D50S90C6GX00LF

SEE DRAWING C01-8646-0001

www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 	mm 
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	PESSON	1995/10/03	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2	
Eng	PESSON	1995/10/03			0.XX	±0.1			
Chr	LEGARE	1995/10/03			0.XXX	±0.1			
Appr	LEGARE	1995/10/03	0.XX' ±2"				ECN	LS06-0140	
			Product family			D-SUB		Spec ref -	
			FEMALE CONNECTOR DELTA LOW PROFIL title straight press-fit			dwg no C01-8646-0376		Rev. E	
catalog no			-			CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
B	-	LEN	1996/07/21
C	LS05-004	MPE	2005/02/14
D	LS06-0095	LGO	2006/06/21
E	LS06-0140	LGO	2006/09/21
-	-	-	-
-	-	-	-
-	-	-	-