

view shown without plastic pin

A

B

C


D

A



B

C


D

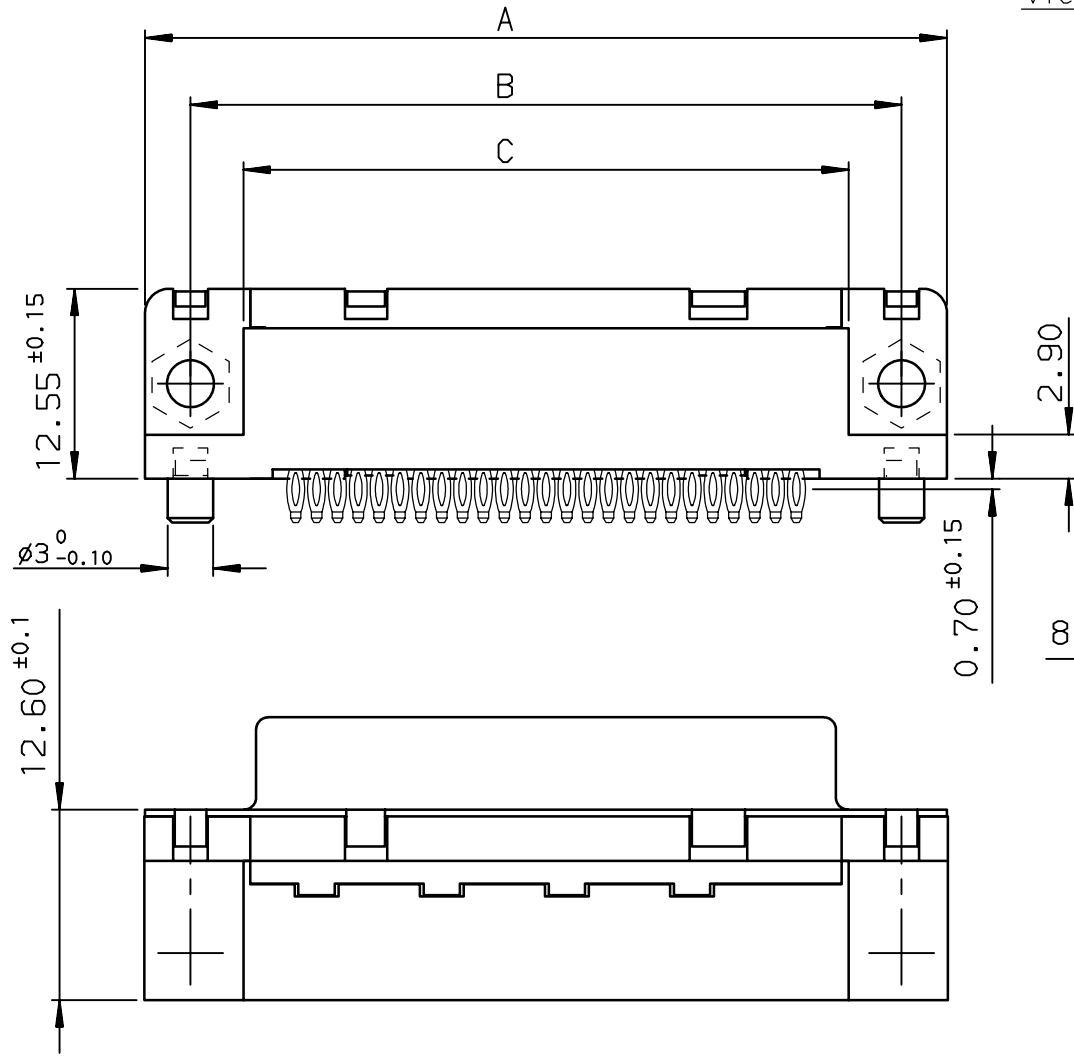

Detail of plastic pin

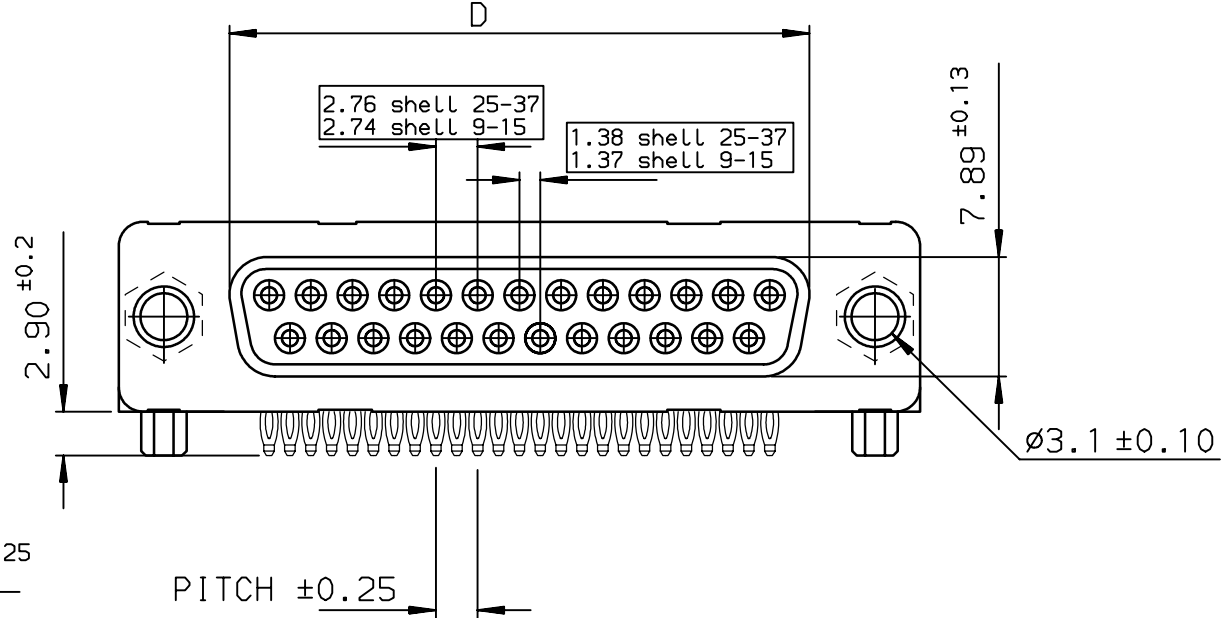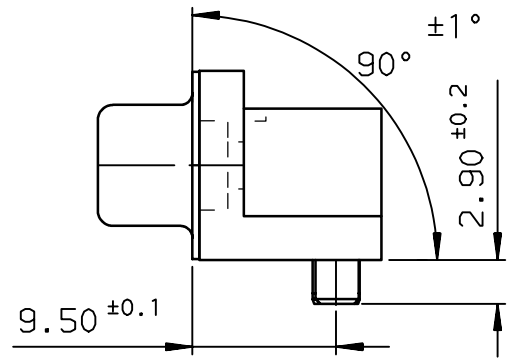

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.25 mm)

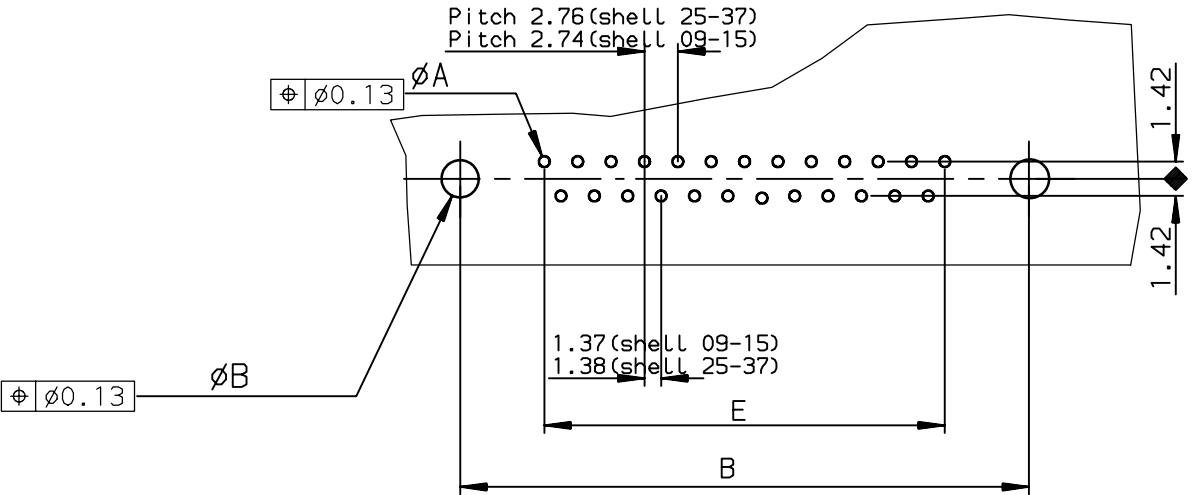

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4PA00	D09S80C6PA00
15	39.14	33.32	26.32	24.54	19.18	D15S80C4PA00	D15S80C6PA00
25	53.03	47.04	40.04	38.25	33.12	D25S80C4PA00	D25S80C6PA00
37	69.32	63.50	56.50	54.71	49.68	D37S80C4PA00	D37S80C6PA00
Gold flash						0,76 µ gold	

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4PA00LF	D09S80C6PA00LF
15	39.14	33.32	26.32	24.54	19.18	D15S80C4PA00LF	D15S80C6PA00LF
25	53.03	47.04	40.04	38.25	33.12	D25S80C4PA00LF	D25S80C6PA00LF
37	69.32	63.50	56.50	54.71	49.68	D37S80C4PA00LF	D37S80C6PA00LF
Gold flash						0,76 µ gold	

rev	ecn no	dr	date
C	-	MAS	1999/07/23
D	LS05-004	MPE	2005/02/14
E	LS06-0095	LGO	2006/06/29
F	LS06-0140	LGO	2006/09/23
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 	 mm	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	PESSON	1995/10/30	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2		
Eng	PESSON	1995/10/30			0.XX	±0.1				
Chr	LEGARE	1995/10/30			0.XX' ±2°	0.XXX				±0.1
Appr	LEGARE	1995/10/30	Product family				D-SUB	Spec ref -		
		title	FEMALE CONNECTOR DELTA D USA					dwg no C01-8646-0414	Rev. F	
			right angled press fit							
			catalog no -							
			CUSTOMER					sheet 1 of 1		

European Views