
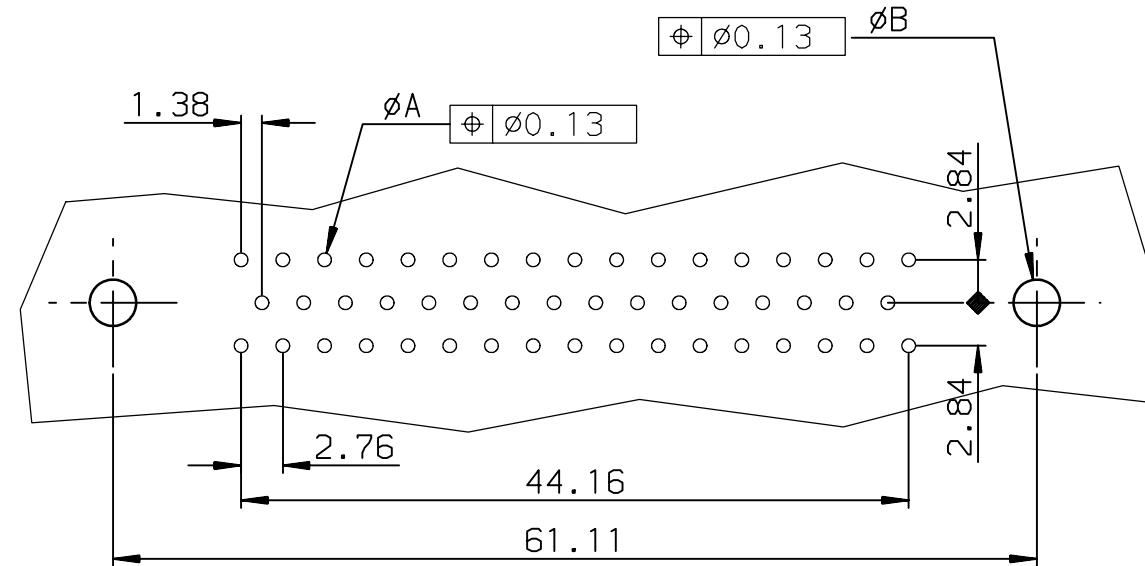
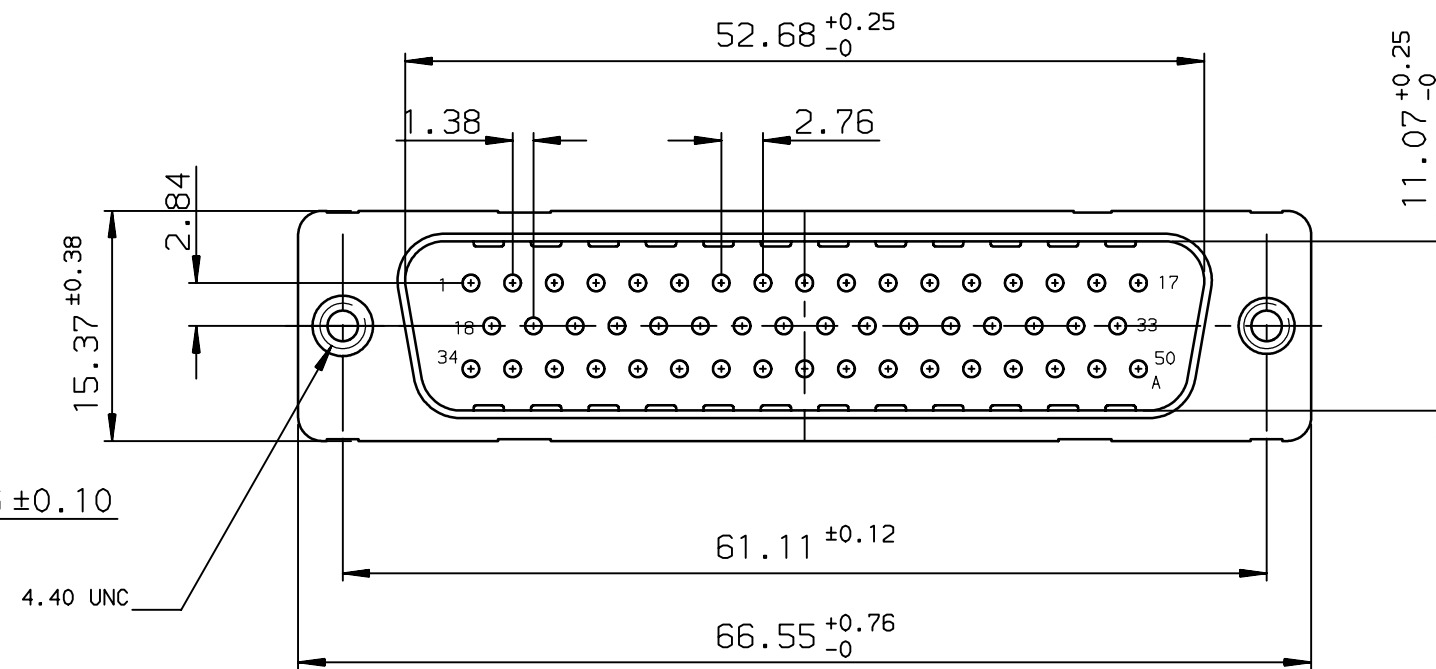
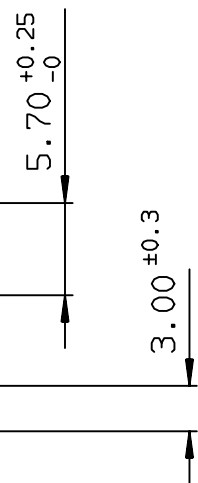
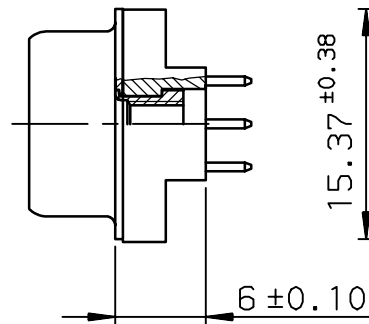


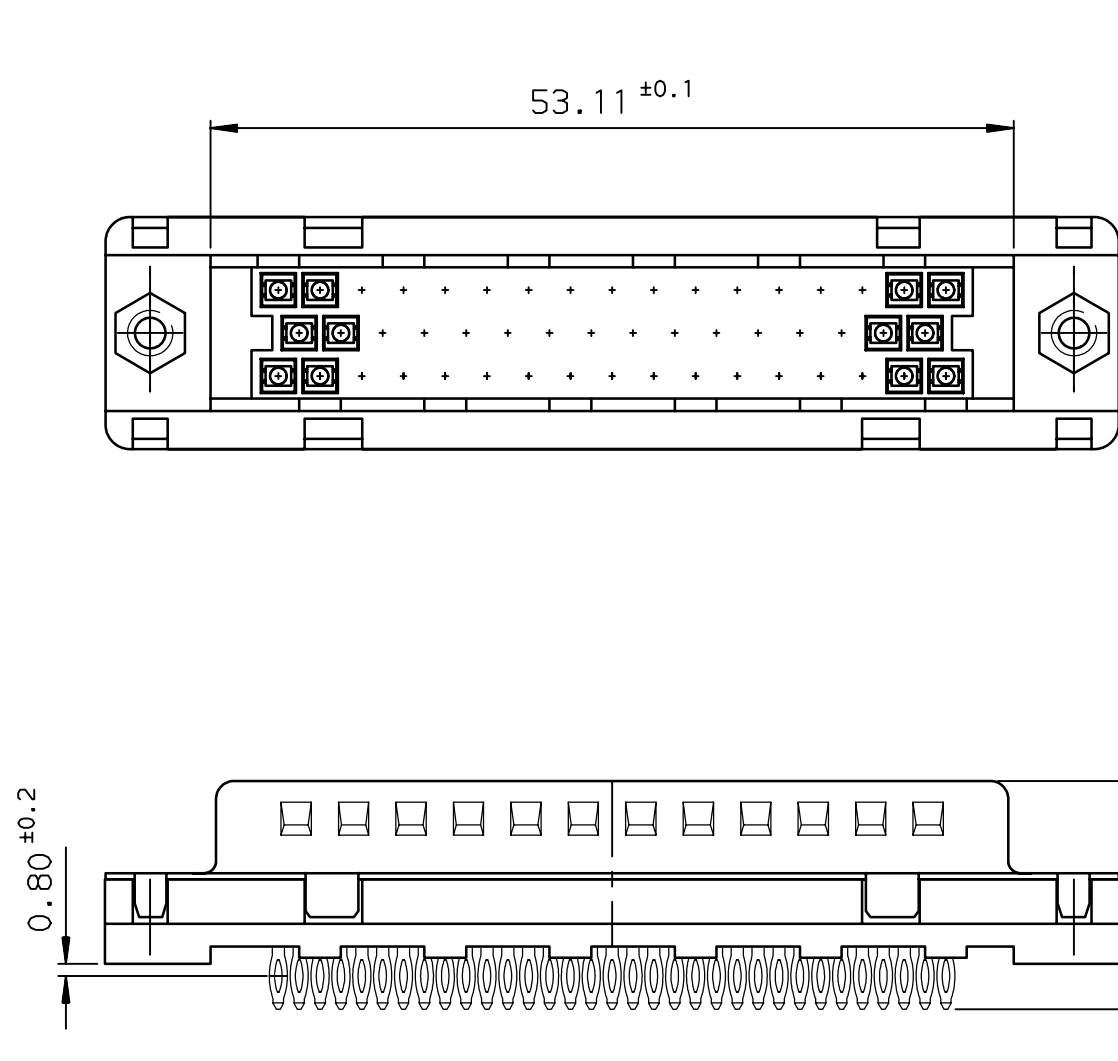

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50P91C4PX00
0.76µ gold	D50P91C6PX00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50P91C4PX00LF
0.76µ gold	D50P91C6PX00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

rev	ecn no	dr	date
A	-	JAR	1996/07/24
B	LS05-004	MPE	2005/02/15
C	LS06-0097	LGO	2006/07/28
D	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 	 mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	PESSON	1996/07/24	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2
Eng	PESSON	1996/07/24			0.XX	±0.1		
Chr	LEGARE	1996/07/24			0.XX* ±2*	0.XXX		
Appr	LEGARE	1996/07/24	Product family				D-SUB	ECN L506-0140
							Spec ref	-
			title MALE CONNECTOR DELTA D STD EUROPE STRAIGHT PRESS-FIT.				dwg no C01-8646-0463	Rev. D
			catalog no		-	CUSTOMER		sheet 1 of 1