


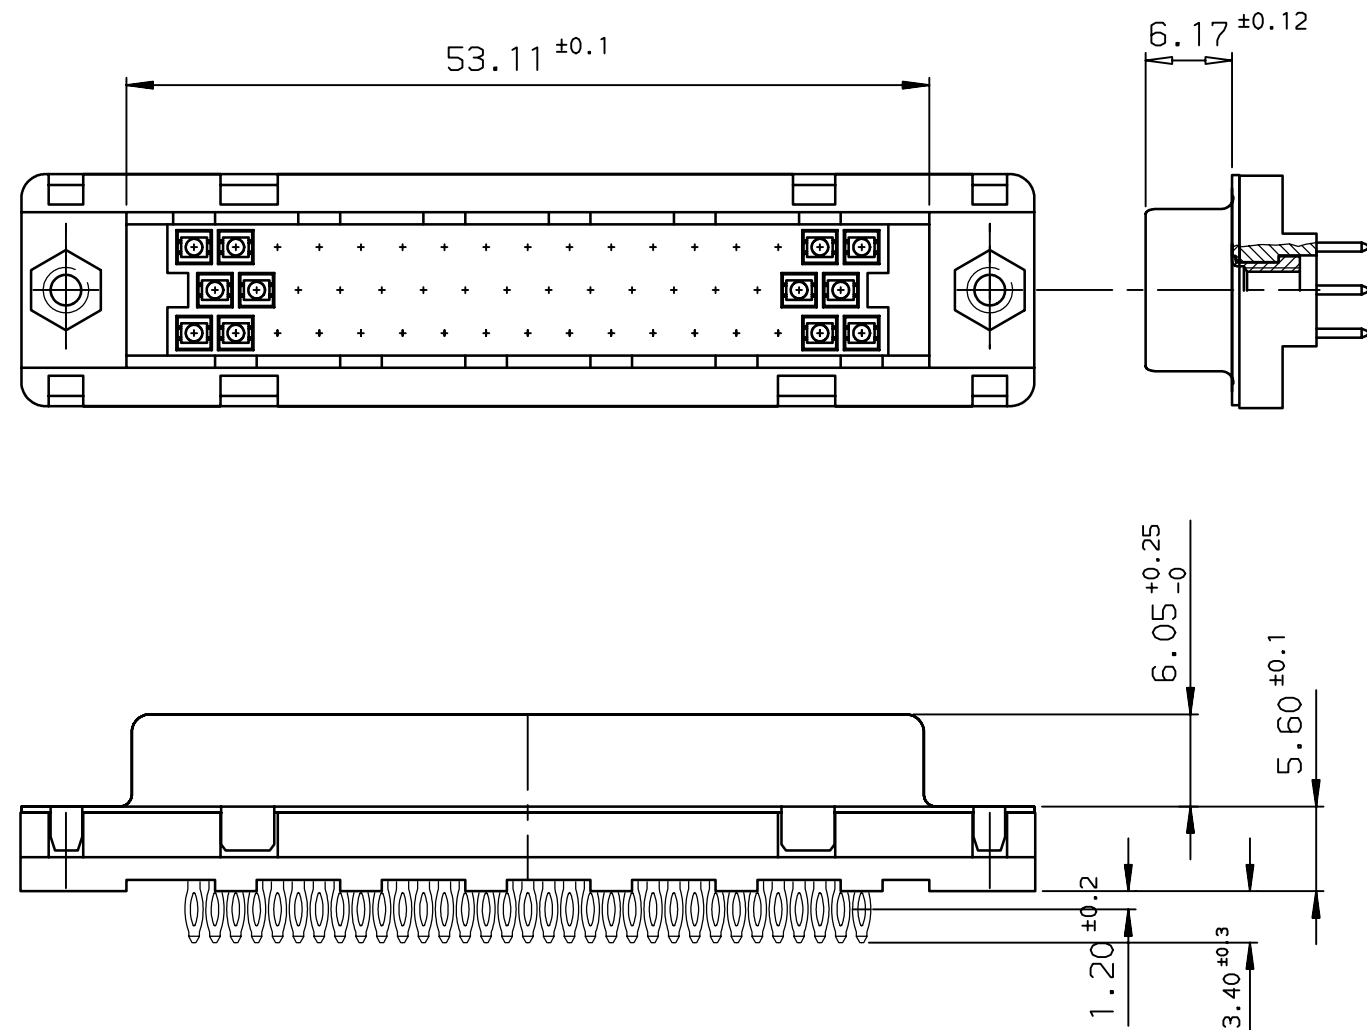


TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S90C4PX00
0.76µ gold	D50S90C6PX00


LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S90C4PX00LF
0.76µ gold	D50S90C6PX00LF


rev	ecn no	dr	date
A	-	JOU	1996/07/26
B	LS05-004	MPE	2005/02/15
C	LS06-0095	LGO	2006/06/29
D	LS06-0140	LGO	2006/09/23
-	-	-	-
-	-	-	-
-	-	-	-

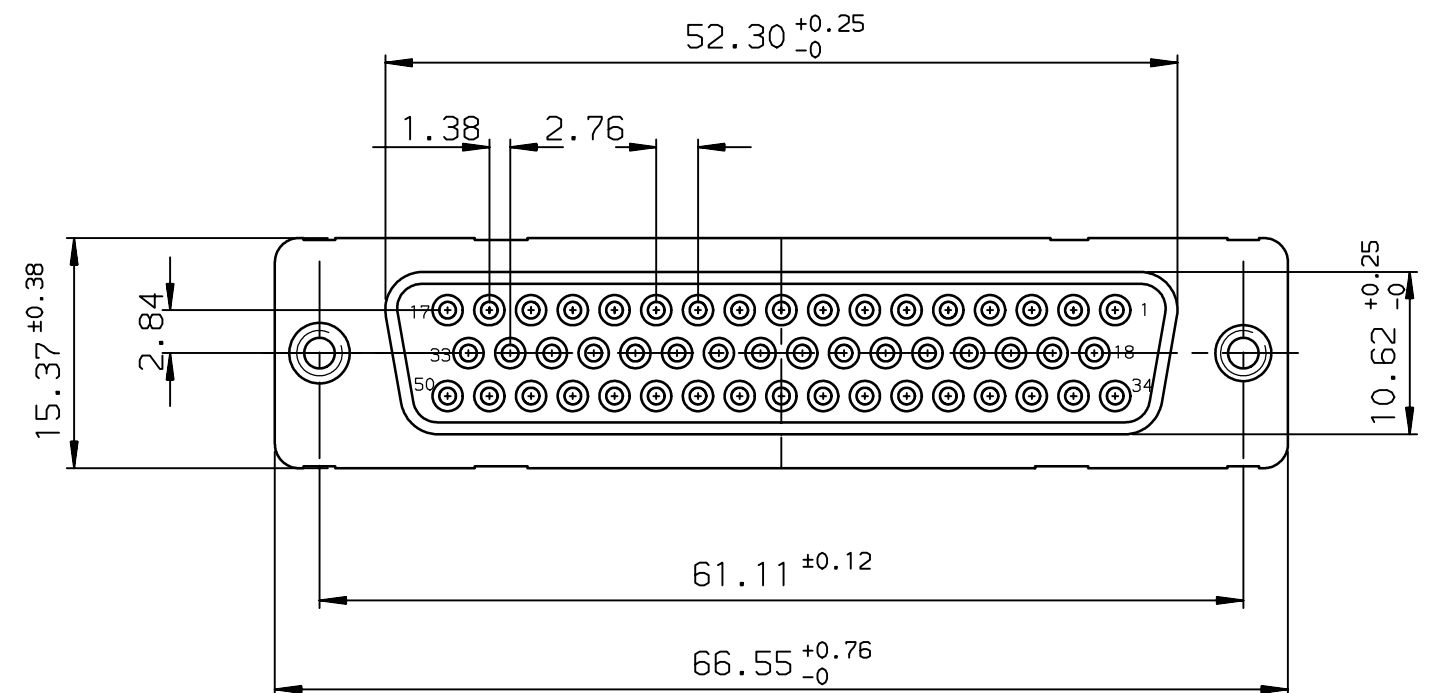

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

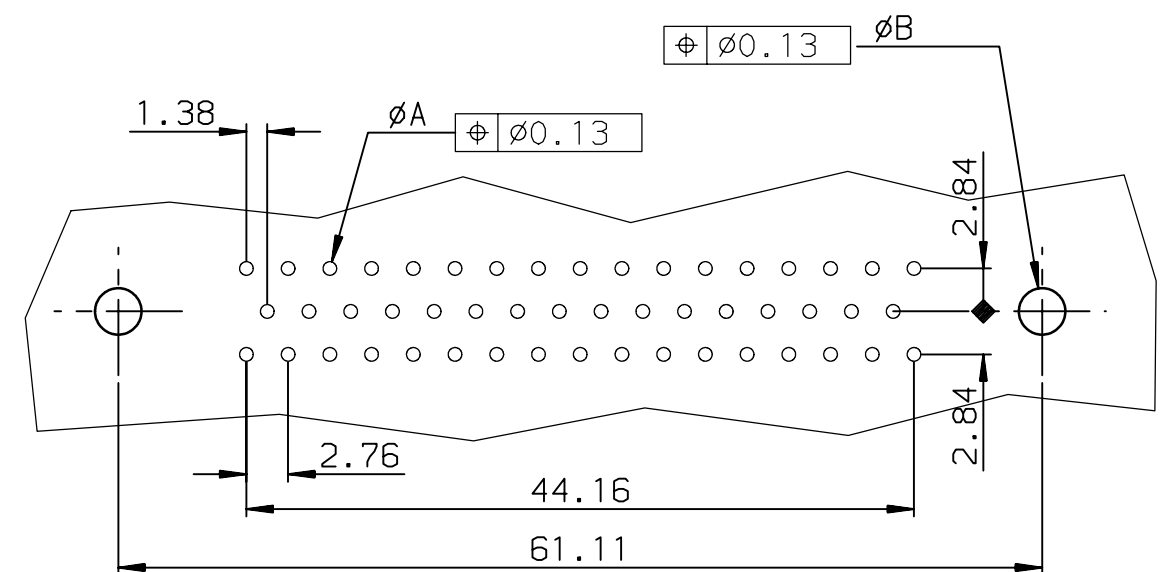

GENERAL CHARACTERISTICS AND ROHS INFORMATION:
SEE DRAWING C01-8646-0001

www.fciconnect.com			surface ISO 1302 ✓		tolerance std ISO 406 ISO 1101		projection 		mm 			
			TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	PESSON	1996/07/26	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2				
Eng	PESSON	1996/07/26			0.XX	±0.1						
Chr	LEGARE	1996/07/26			0.XX' ±2°	0.XXX		±0.1	ECN LS06-0140			
Appr	LEGARE	1996/07/26	Product family				D-SUB		Spec ref -			
			title FEMALE CONNECTOR DELTA D LOW PROFIL STRAIGHT PRESS-FIT.				dwg no C01-8646-0465				Rev. D	
			catalog no -				CUSTOMER		sheet 1 of 1			