

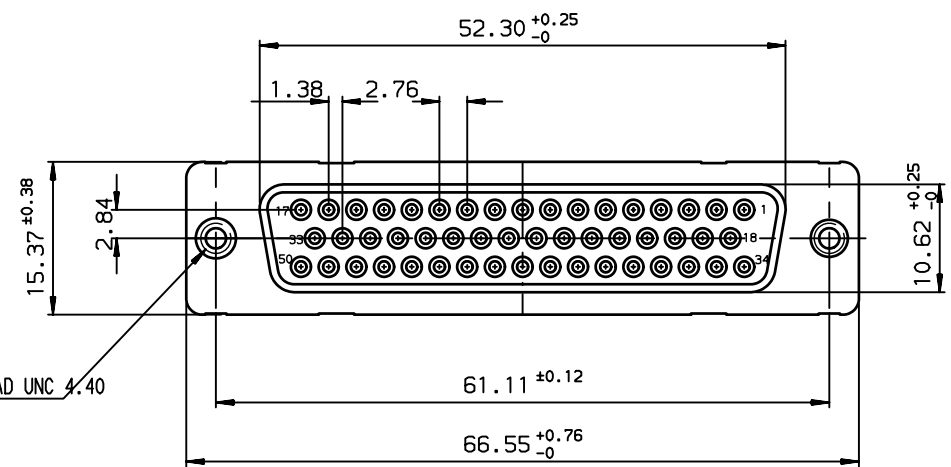
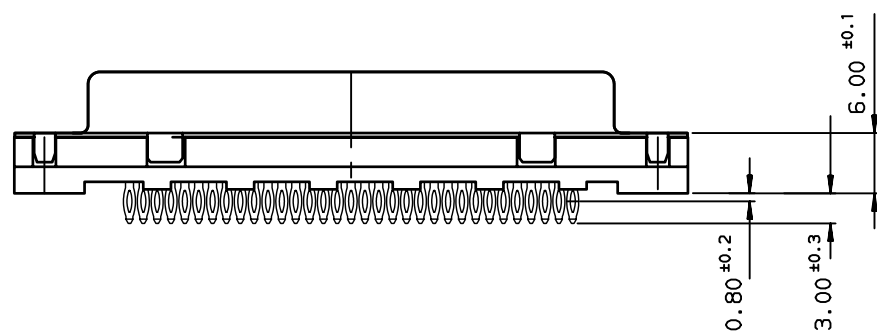


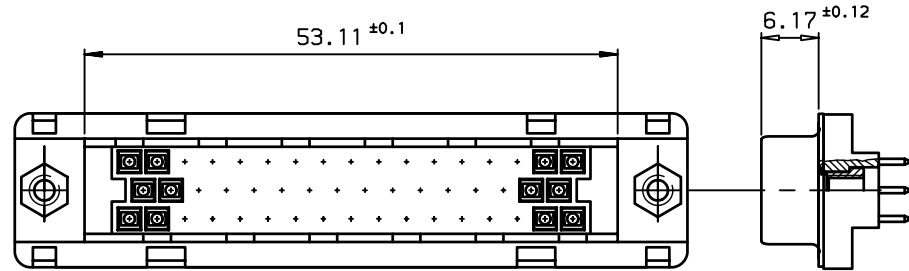

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

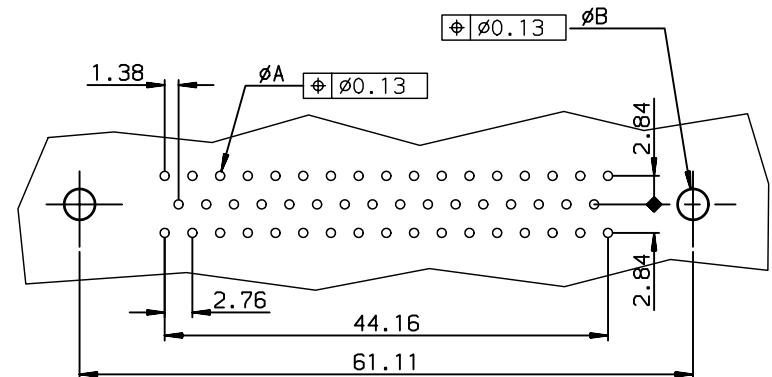

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S91C4PX00
0.76µ gold	D50S91C6PX00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S91C4PX00LF
0.76µ gold	D50S91C6PX00LF

rev	ecn no	dr	date
A	-	JOU	1996/08/12
B	LS05-004	MPE	2005/02/11
C	LS06-0095	LGO	2006/06/27
D	LS06-0140	LGO	2006/09/22
E	LS08-0217	MPE	2008/11/25
-	-	-	-
-	-	-	-

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	JOUBERT	1996/08/12	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2			
Eng	PESSON	1996/08/12			0.XX	±0.1					
Chr	LEGARE	1996/08/12			0.XXX	±0.1		ECN LS08-0217			
Appr	LEGARE	1996/08/12	Product family				D-SUB	Spec ref -			
			FEMALE CONNECTOR DELTA D STD EUROPE				dwg no C01-8646-0477		Rev. E		
			STRAIGHT PRESS-FIT.								
catalog no			-				CUSTOMER		sheet 1 of 1		