
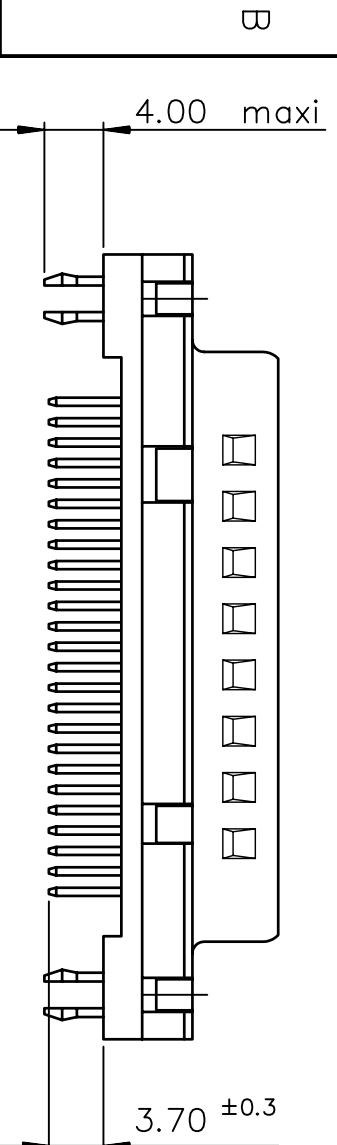
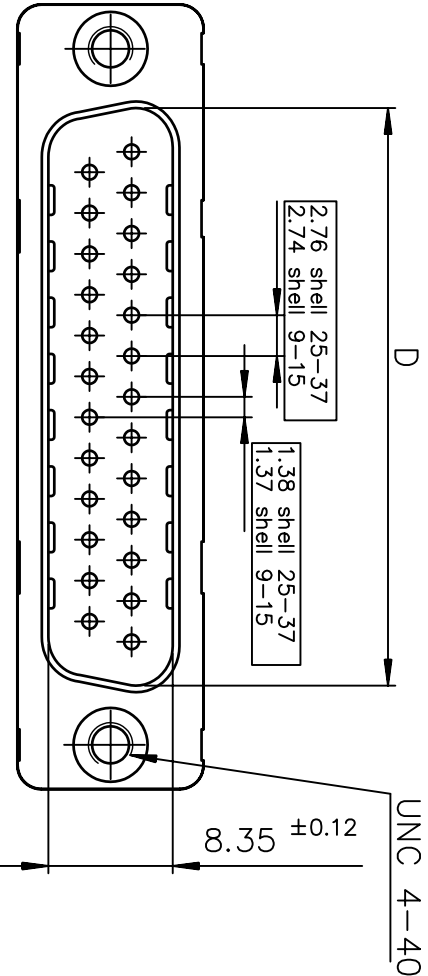


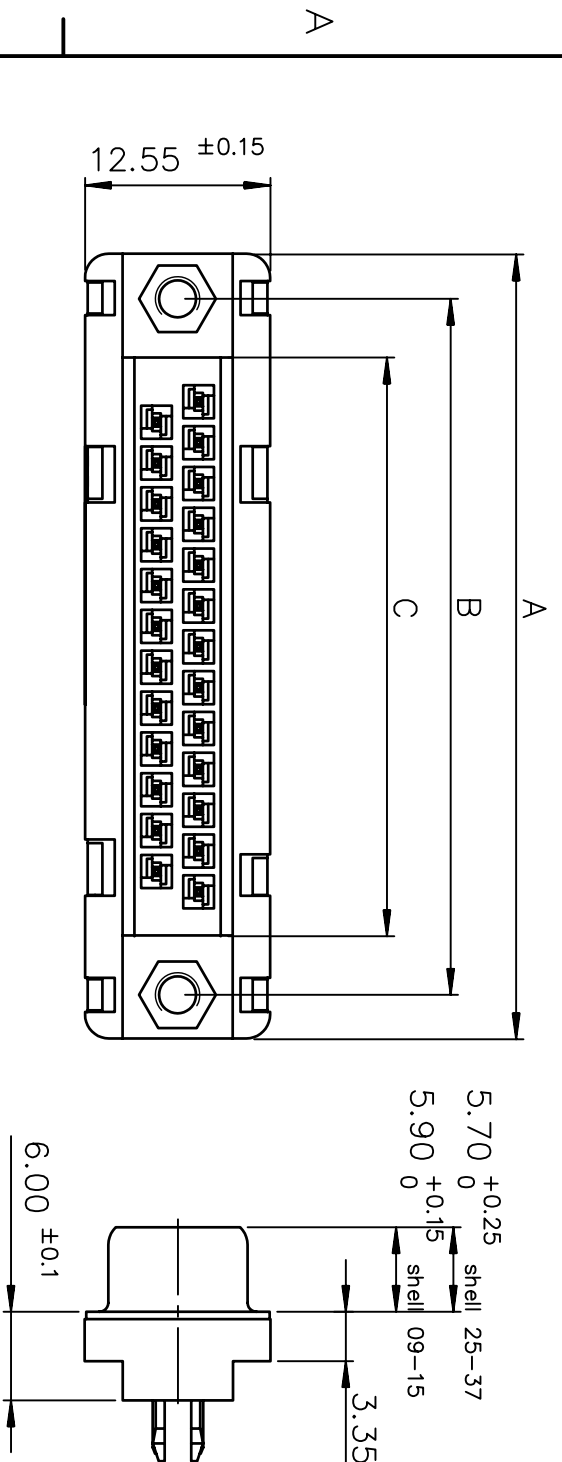

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.GX00
15	39.14	33.32	25.18	25.12	19.18	D15P24B.GX00
25	53.03	47.04	39.12	38.84	33.12	D25P24B.GX00
37	69.32	63.50	55.68	55.30	49.68	D37P24B.GX00


Protection: 4 --> flash AU
6 --> 0.76µ AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24B.GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24B.GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B.GX00LF

Protection: 4 --> flash AU
6 --> 0.76µ AU

rev	ecn no	dr	date
A	-	JOU	1996/09/10
B	LS05-001	MPE	2005/03/14
C	LS05-0056	MPE	2005/06/28
D	LS06-0097	LGO	2006/07/28
E	I10-0115	NG	2010-05-15
-	-	-	-

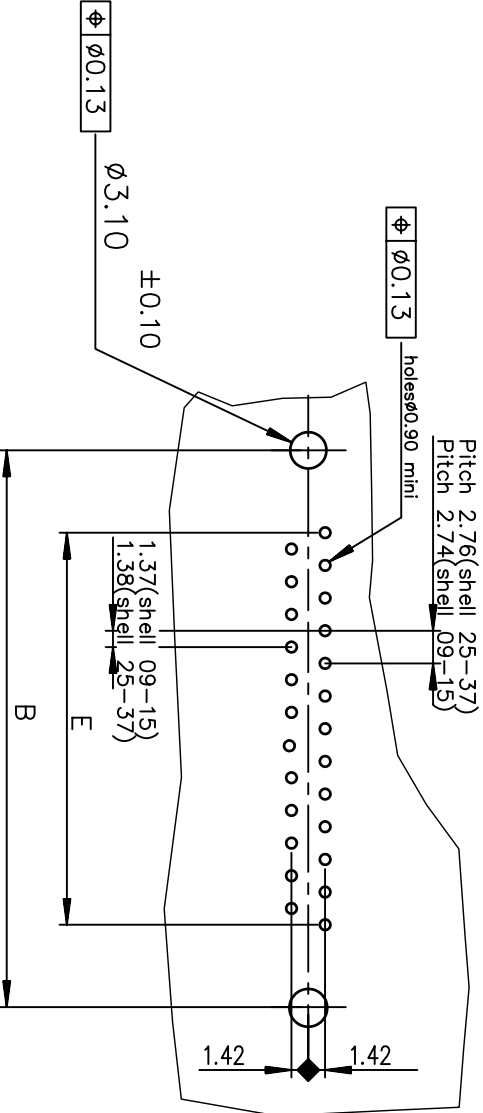

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

www.fciconnect.com				surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm	European Views
				TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	JOUBERT	1996/09/10	ANGULAR	0.X		±0.1		size	A3	
Eng	PESSON	1996/09/10	LINEAR	0.XX		±0.1		size	2	
Chr	NIRMAL G	2010-05-15	0.XX	±2		±0.1		ECN	I10-0115	
Appr	SUDHIR V	2010-05-15	Product family			D-SUB	Spec ref	-		
FCI				MALE CONNECTOR DELTA D ST				C01-8646-0489		Rev.
straight,solder type for				-				CUSTOMER		sheet 1 of 1