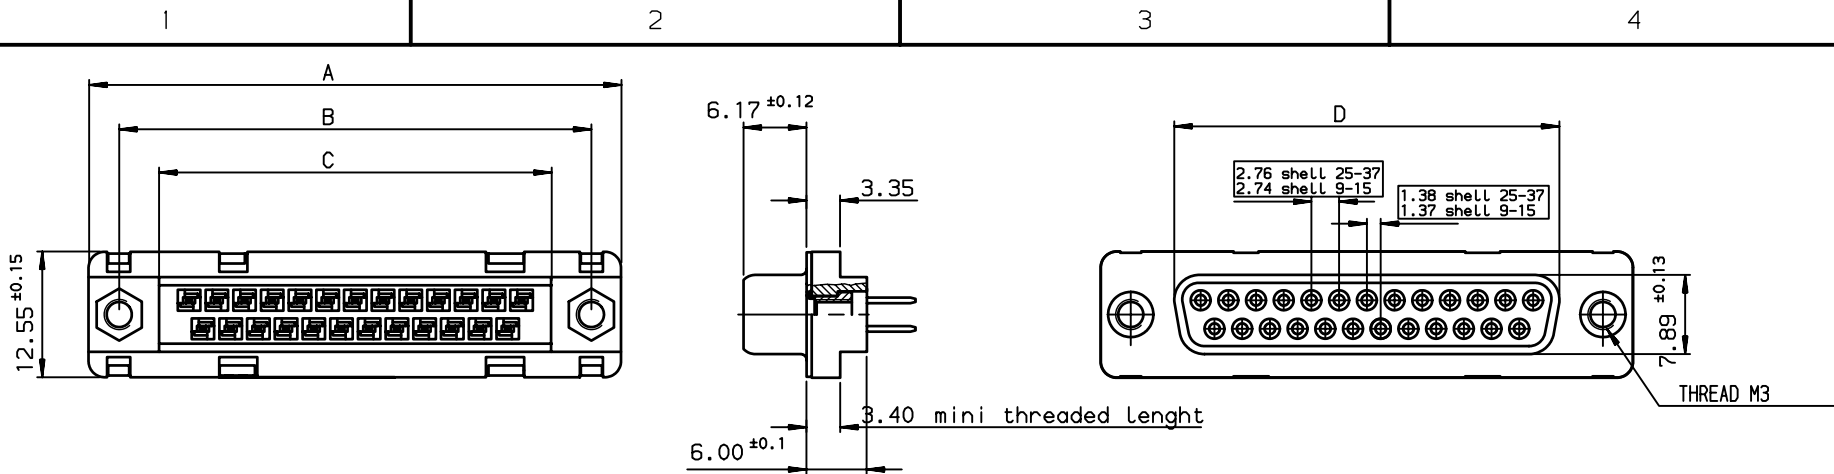


TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PL00
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PL00
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PL00
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PL00

Plating: 4 --> flash AU

Plating: 6 --> 0.76μ AU

LEAD FREE PART NUMBER


SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PL00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PL00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PL00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PL00LF

Plating: 4 --> flash AU

Plating: 6 --> 0.76μ AU

PC card drilling dimensions(after plating)

(thickness 1.60±0.20mm)

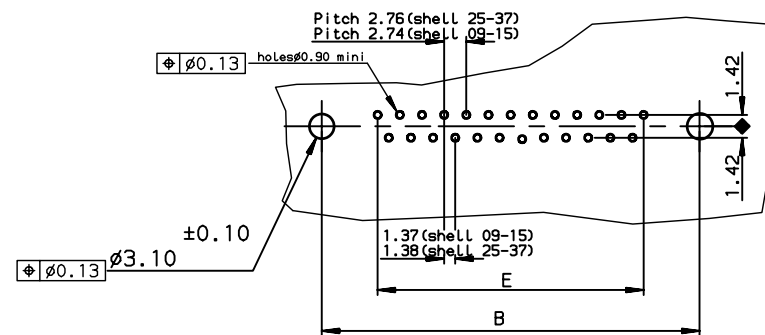

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	LINEAR	size A3
Dr JOUBERT 1996/09/10		0.X	±0.1	Scale 2
Eng PESSON 1996/09/10		0.XX	±0.1	ECN LS08-0217
Chr LEGARE 1996/09/10		0.XXX	±0.1	Spec ref -
Appr LEGARE 1996/09/10		Product family D-SUB		
FCI		FEMALE CONNECTOR STD EUROPE		Rev. D
title straight solder type for PCB 1.6mm		dwg no C01-8646-0491		
catalog no		CUSTOMER		sheet 1 of 1

rev	ecn no	dr	date
A	-	JOU	1996/09/10
B	LS05-001	MPE	2005/03/14
C	LS06-0095	LGO	2006/06/29
D	LS08-0217	MPE	2008/11/25
-	-	-	-
-	-	-	-
-	-	-	-