





A

B



C

D


view shown without plastic pin and grounding

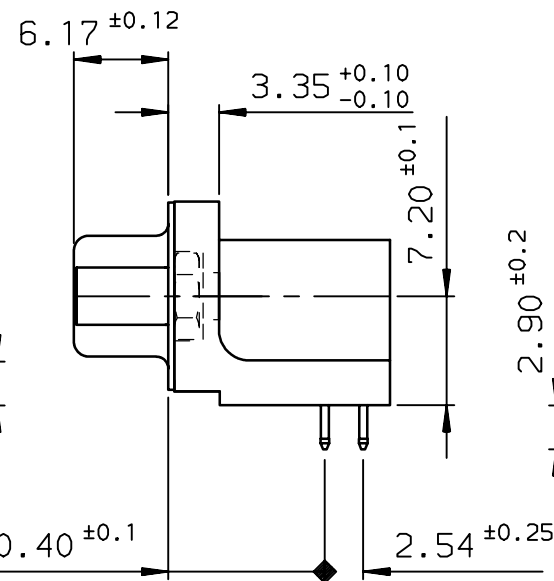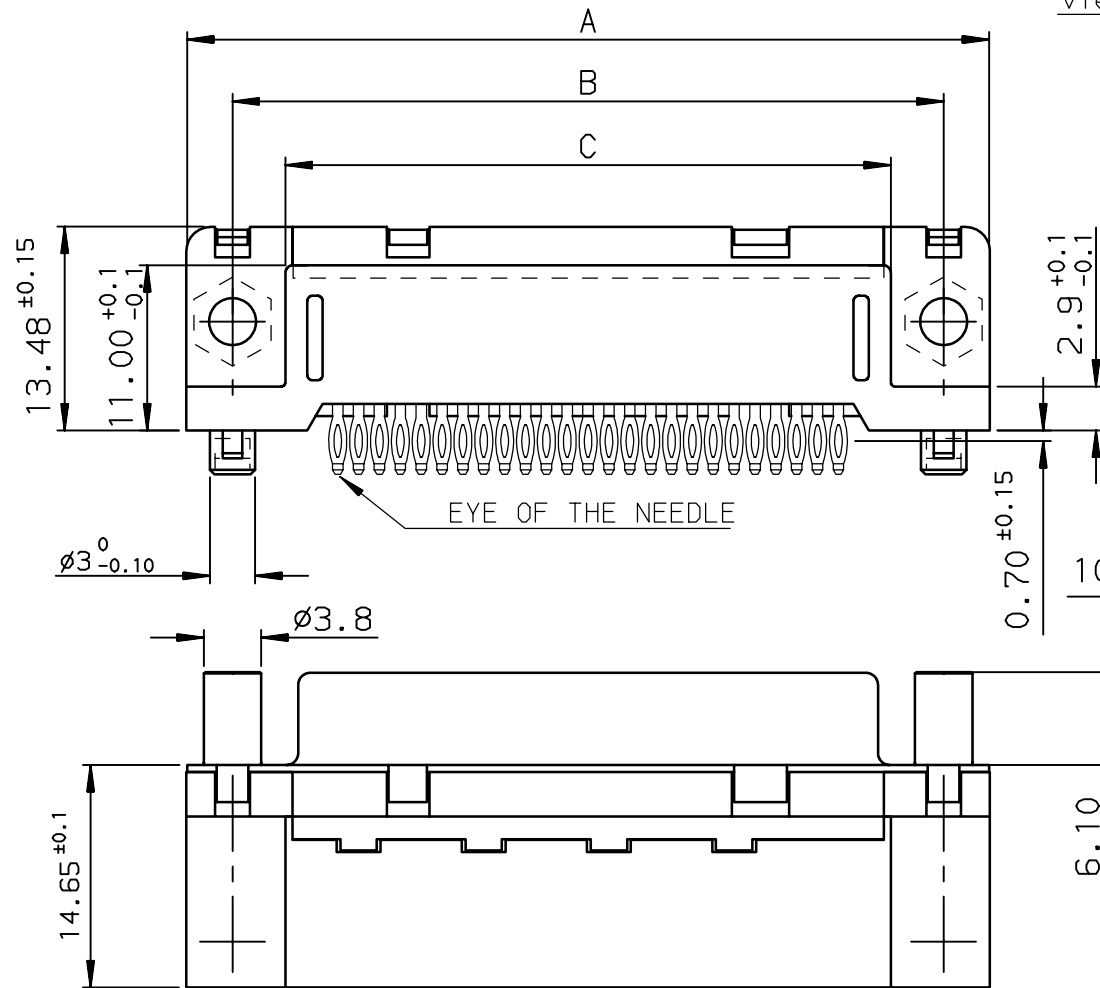

Detail of grounding strip

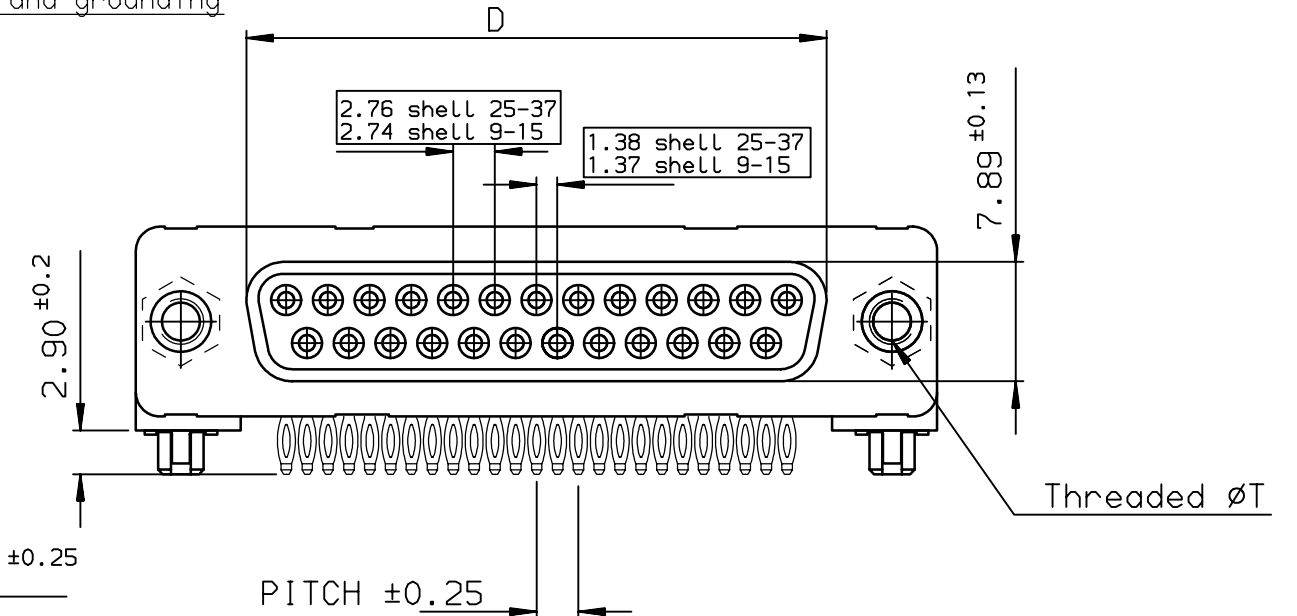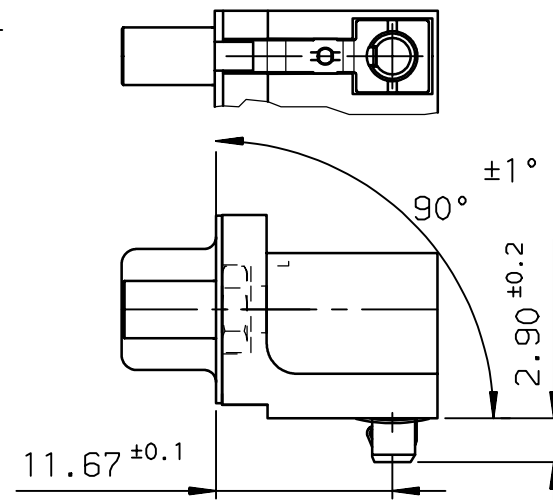

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.20)

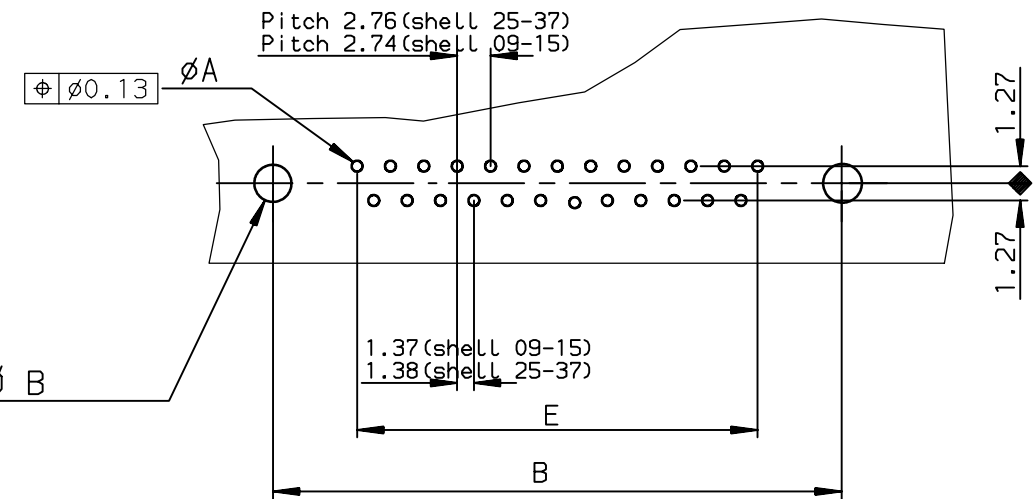

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S81C4G*00	D09S81C6G*00
15	39.14	33.32	26.32	24.54	19.18	D15S81C4G*00	D15S81C6G*00
25	53.03	47.04	40.04	38.25	33.12	D25S81C4G*00	D25S81C6G*00
37	69.32	63.50	56.50	54.71	49.68	D37S81C4G*00	D37S81C6G*00
Gold flash						0,76 µ gold	

Threaded ØT M3 = I
Threaded ØT 4.40 = V

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S81C4G*00LF	D09S81C6G*00LF
15	39.14	33.32	26.32	24.54	19.18	D15S81C4G*00LF	D15S81C6G*00LF
25	53.03	47.04	40.04	38.25	33.12	D25S81C4G*00LF	D25S81C6G*00LF
37	69.32	63.50	56.50	54.71	49.68	D37S81C4G*00LF	D37S81C6G*00LF
Gold flash						0,76 µ gold	

Threaded ØT M3 = I
Threaded ØT 4.40 = V

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

rev	ecn no	dr	date
E	-	ATC	2000/12/22
F	LS05-004	MPE	2005/02/14
G	LS06-0095	LGO	2006/07/20
H	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	PESSON	1997/05/15	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2			
Eng	PESSON	1997/05/15			0.XX	±0.1					
Chr	LEGARE	1997/05/15			0.XX' ±2°	0.XXX		±0.1			
Appr	LEGARE	1997/05/15	Product family					D-SUB	Spec ref -		
			FEMALE CONNECTOR DELTA D EUROPE					C01-8646-0544			Rev. H
			right angled press fit								
catalog no			-					CUSTOMER		sheet 1 of 1	