


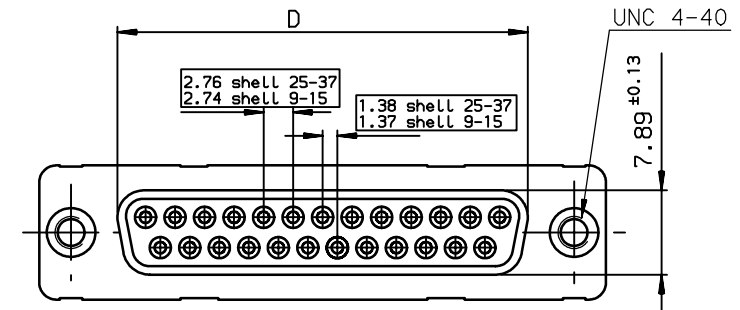

Protection: 4 --> flash AU
6 --> 0.76 μ AU

LEAD FREE PART NUMBER

Protection: 4 --> flash AU
6 --> 0.76 μ AU

Technical drawing of a mechanical part showing a top view. The drawing includes the following dimensions and tolerances:

- Overall Width:** $\varnothing 3.10$ with a tolerance of ± 0.10 .
- Overall Length:** E .
- Internal Length:** B .
- Top Surface Features:**
 - Left Circular Feature:** Diameter $\varnothing 0.13$ with a tolerance of ± 0.10 .
 - Right Circular Feature:** Diameter $\varnothing 0.13$ with a tolerance of ± 0.10 .
 - Central Holes:** A series of holes with a diameter of $\varnothing 0.90$ mini. The pitch between these holes is 2.76 (shell 25-37) and 2.74 (shell 09-15).
 - Vertical Spacing:** The distance between the top and bottom rows of holes is 1.37 (shell 09-15) and 1.38 (shell 25-37).
 - Right Edge Features:** Two vertical dimensions of 1.42 are shown on the right edge.

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:	
SEE DRAWING C01-8646-0000	

European Views

www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 	mm 
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	MASSON	2000/07/26	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2	
Eng	PESSON	2000/07/26			0.XX	±0.1			
Chr	LEGARE	2000/07/26			0.XXX	±0.1			
Appr	LEGARE	2000/07/26	0.X* ±2*			ECN	LS06-0097		
			Product family				D-SUB	Spec ref -	
	title FEMALE CONNECTOR FOR FOOT STRAIGHT SOLDER TYPE FOR					dwg no C01-8646-0717	Rev. E		
	catalog no -					CUSTOMER	sheet 1 of 1		