

### SPECIFICATIONS

**Material:** E-SEELS -- Silicone rubber polymer type ASTM D 1418

**Mounting Nut:** E-SEELS: Brass, black-oxide

**Temperature Range:** E-SEELS: -80°F to +400°F

**Pressure Range:** Exceeds 15 psi internal and 1500 psi external.



**Operational Life:** 50,000 actuations (minimum).

**Shelf Life:** Excess of 25 years.

**Resistant to:** Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils

**Agency Recognition:** E-SEELS and HEXSEALS are UL-listed to UL Std. 50 types 1-13, and meet CSA standards.

**Installation:** If a reducing adaptor is required - see page 14 of HEXSEAL catalog HEX200 for part numbers and drawing.

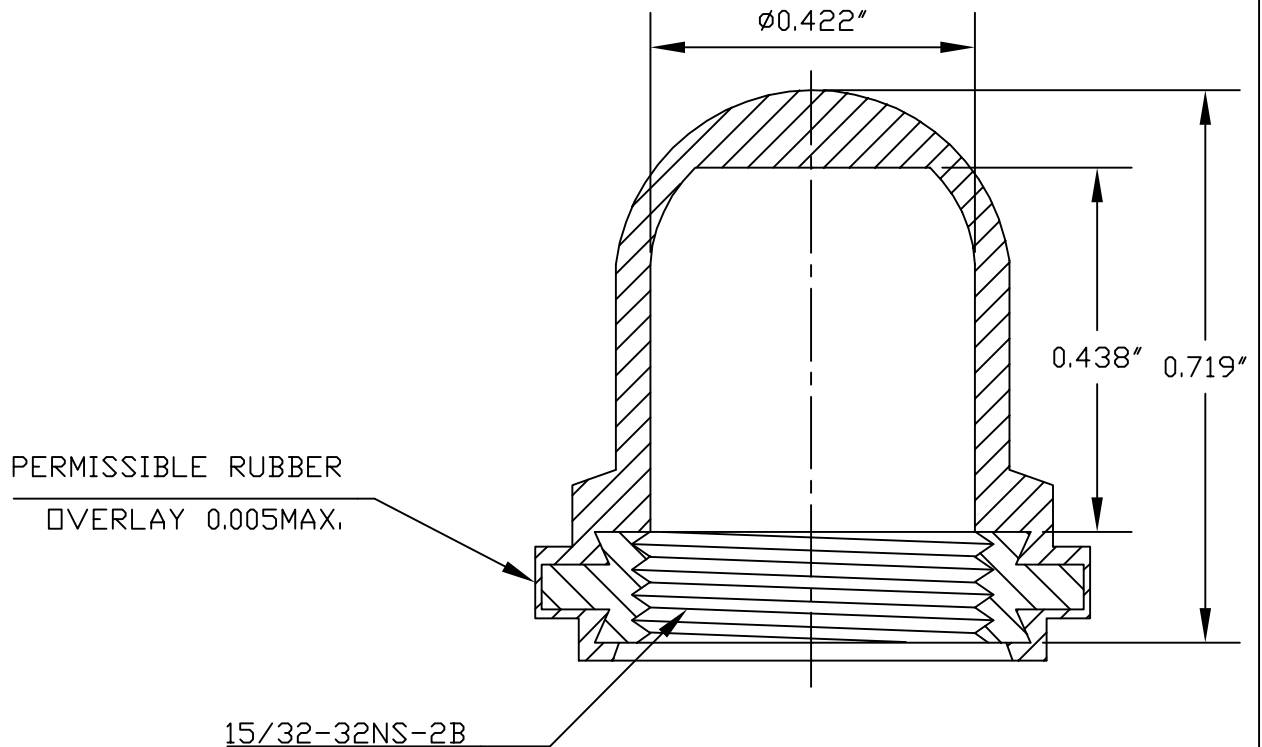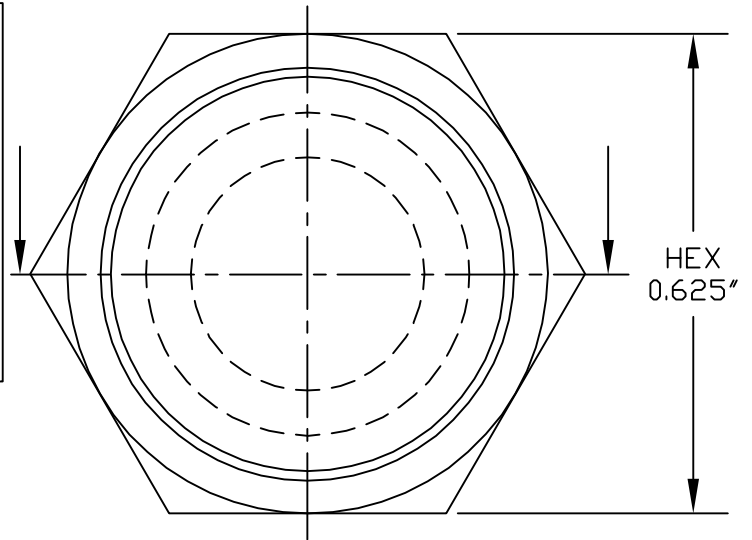

J	REDRAWN	09.29.09
I	CAD COMPUTER GENERATED	09.23.02
H	UPDATED, ADDED ORDER NUMBERS, DWG NO. WAS 12/31/SERIES	W.P. 11.24.76
G	UPDATED	R.C. 08.04.74
F	REDRAWN	TONY C. 12.11.69
REV.	DESCRIPTION	DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.		
MAT'L: SILICONE RUBBER ASTM D 1418	TITLE: BOOT, PUSH BUTTON SWITCH (C1231/42)	ENG. M.MORSE 01.21.60
		DWN. S. GOK 09.29.09
		CHKD. J. CELLA 09.29.09
FINISH: GRAY	APM-HEXSEAL CORPORATION	SCALE 4 : 1
		DWG. NO. (C1231/42) E-SEEL®

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.  
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.