

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		J	REV PER ECO-12-012918	05JUL2012	JM	JG





⚠ MATERIAL: HOUSING - POLYCARBONATE, CLEAR.
TERMINAL - 0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27 μ m[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA, OVER 2.54 μ m[.000100] THICK NICKEL UNDERPLATE.
SHIELD - 0.25[.010] THICK COPPER ALLOY, SATIN NICKEL PLATED.

2. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
3. PLUG WILL ACCEPT 0.74-0.99[.029-.039] DIAMETER STRANDED WIRE, 26 OR 28 AWG, WITH A .110 x .270 MAXIMUM JACKET.

⚠ 4 TERMINATED DIMENSION: 6.15[.242] MAXIMUM.

⚠ 5 LATCH SHALL BE IN POSITION SHOWN IN DETAIL "A" AFTER CRIMPING.

⚠ 500 ASSEMBLIES PER PACKAGE.

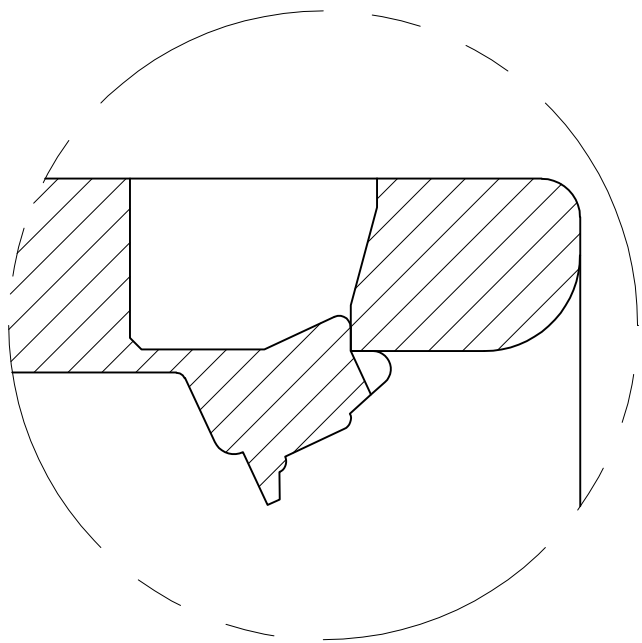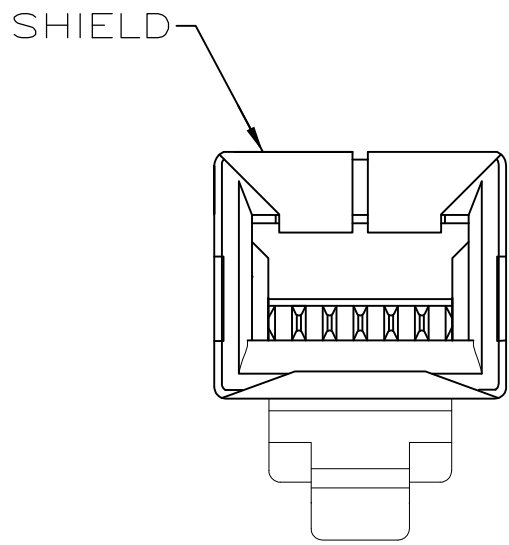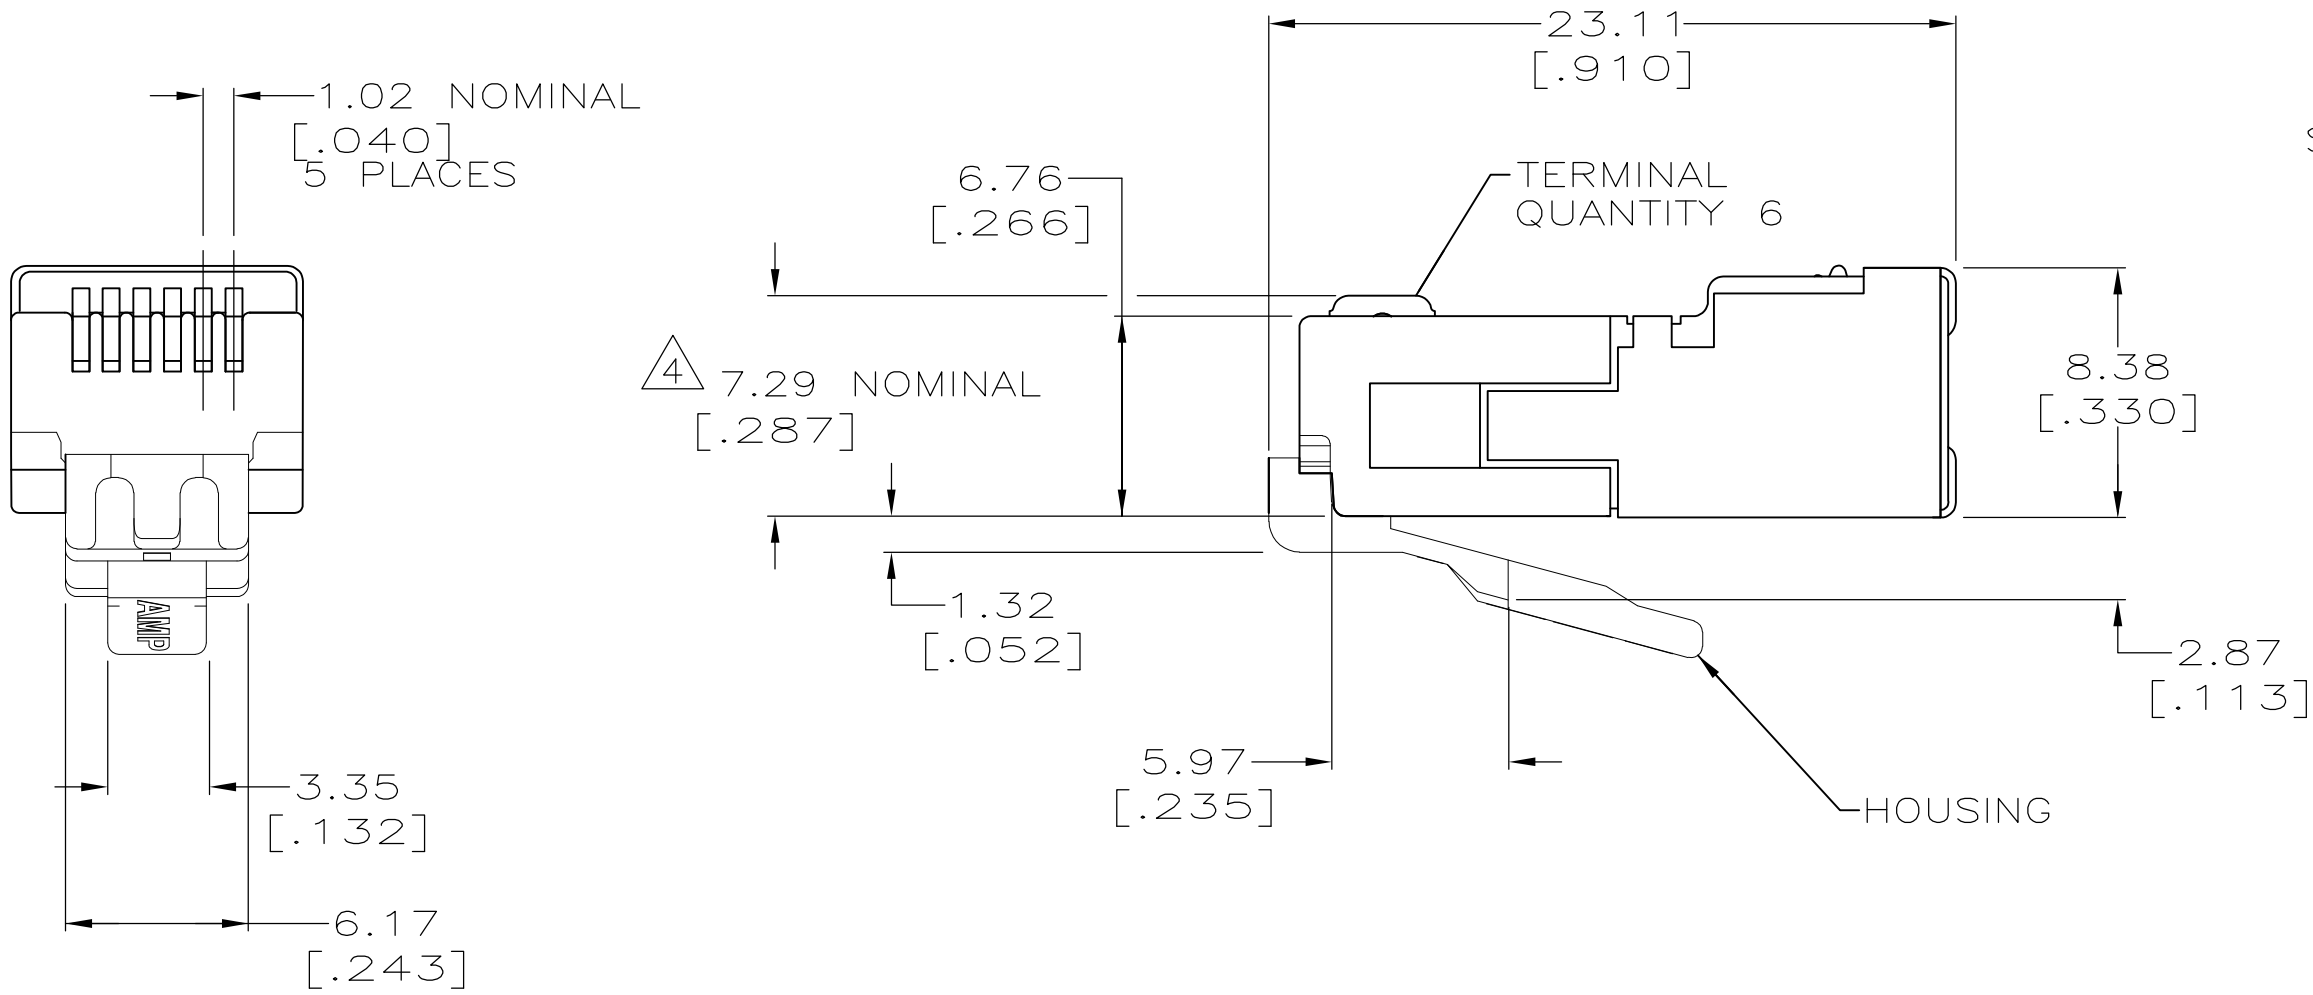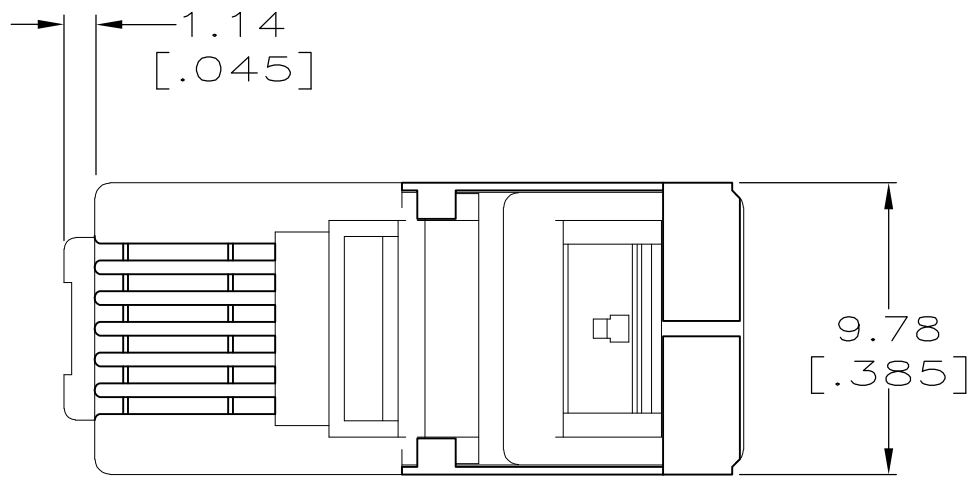

⚠ 5 DETAIL A
LATCH POSITION AFTER CRIMPING
SCALE 10:1

LEAD FREE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	11 MAR 87	⚠ 5		LOOSE PIECE		5-555174-2	
DIMENSIONS: mm [INCHES]		CHK	16 MAR 87	VIC SLACK		PACKAGED		DESCRIPTION	
		APVD	31 MAR 87	BOB FOX		NAME		TE Connectivity	
		PRODUCT SPEC		GENE REED		NAME		MODULAR PLUG ASSEMBLY, 6 POSITION, LONG BODY, SHIELDED, FLAT OVAL CABLE, STRANDED WIRE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC ± -		WEIGHT	-	A2		00779	C=555174		-
1 PLC ± -		CUSTOMER DRAWING		SCALE		4:1	SHEET	1 OF 1	REV
2 PLC ± 0.13[.005]									
3 PLC ± -									
4 PLC ± -									
ANGLES ± -									
FINISH									
⚠ 1 -									