


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
HM	00		AB	REV PER ECO-13-009742	12JUN2013	JM	JG

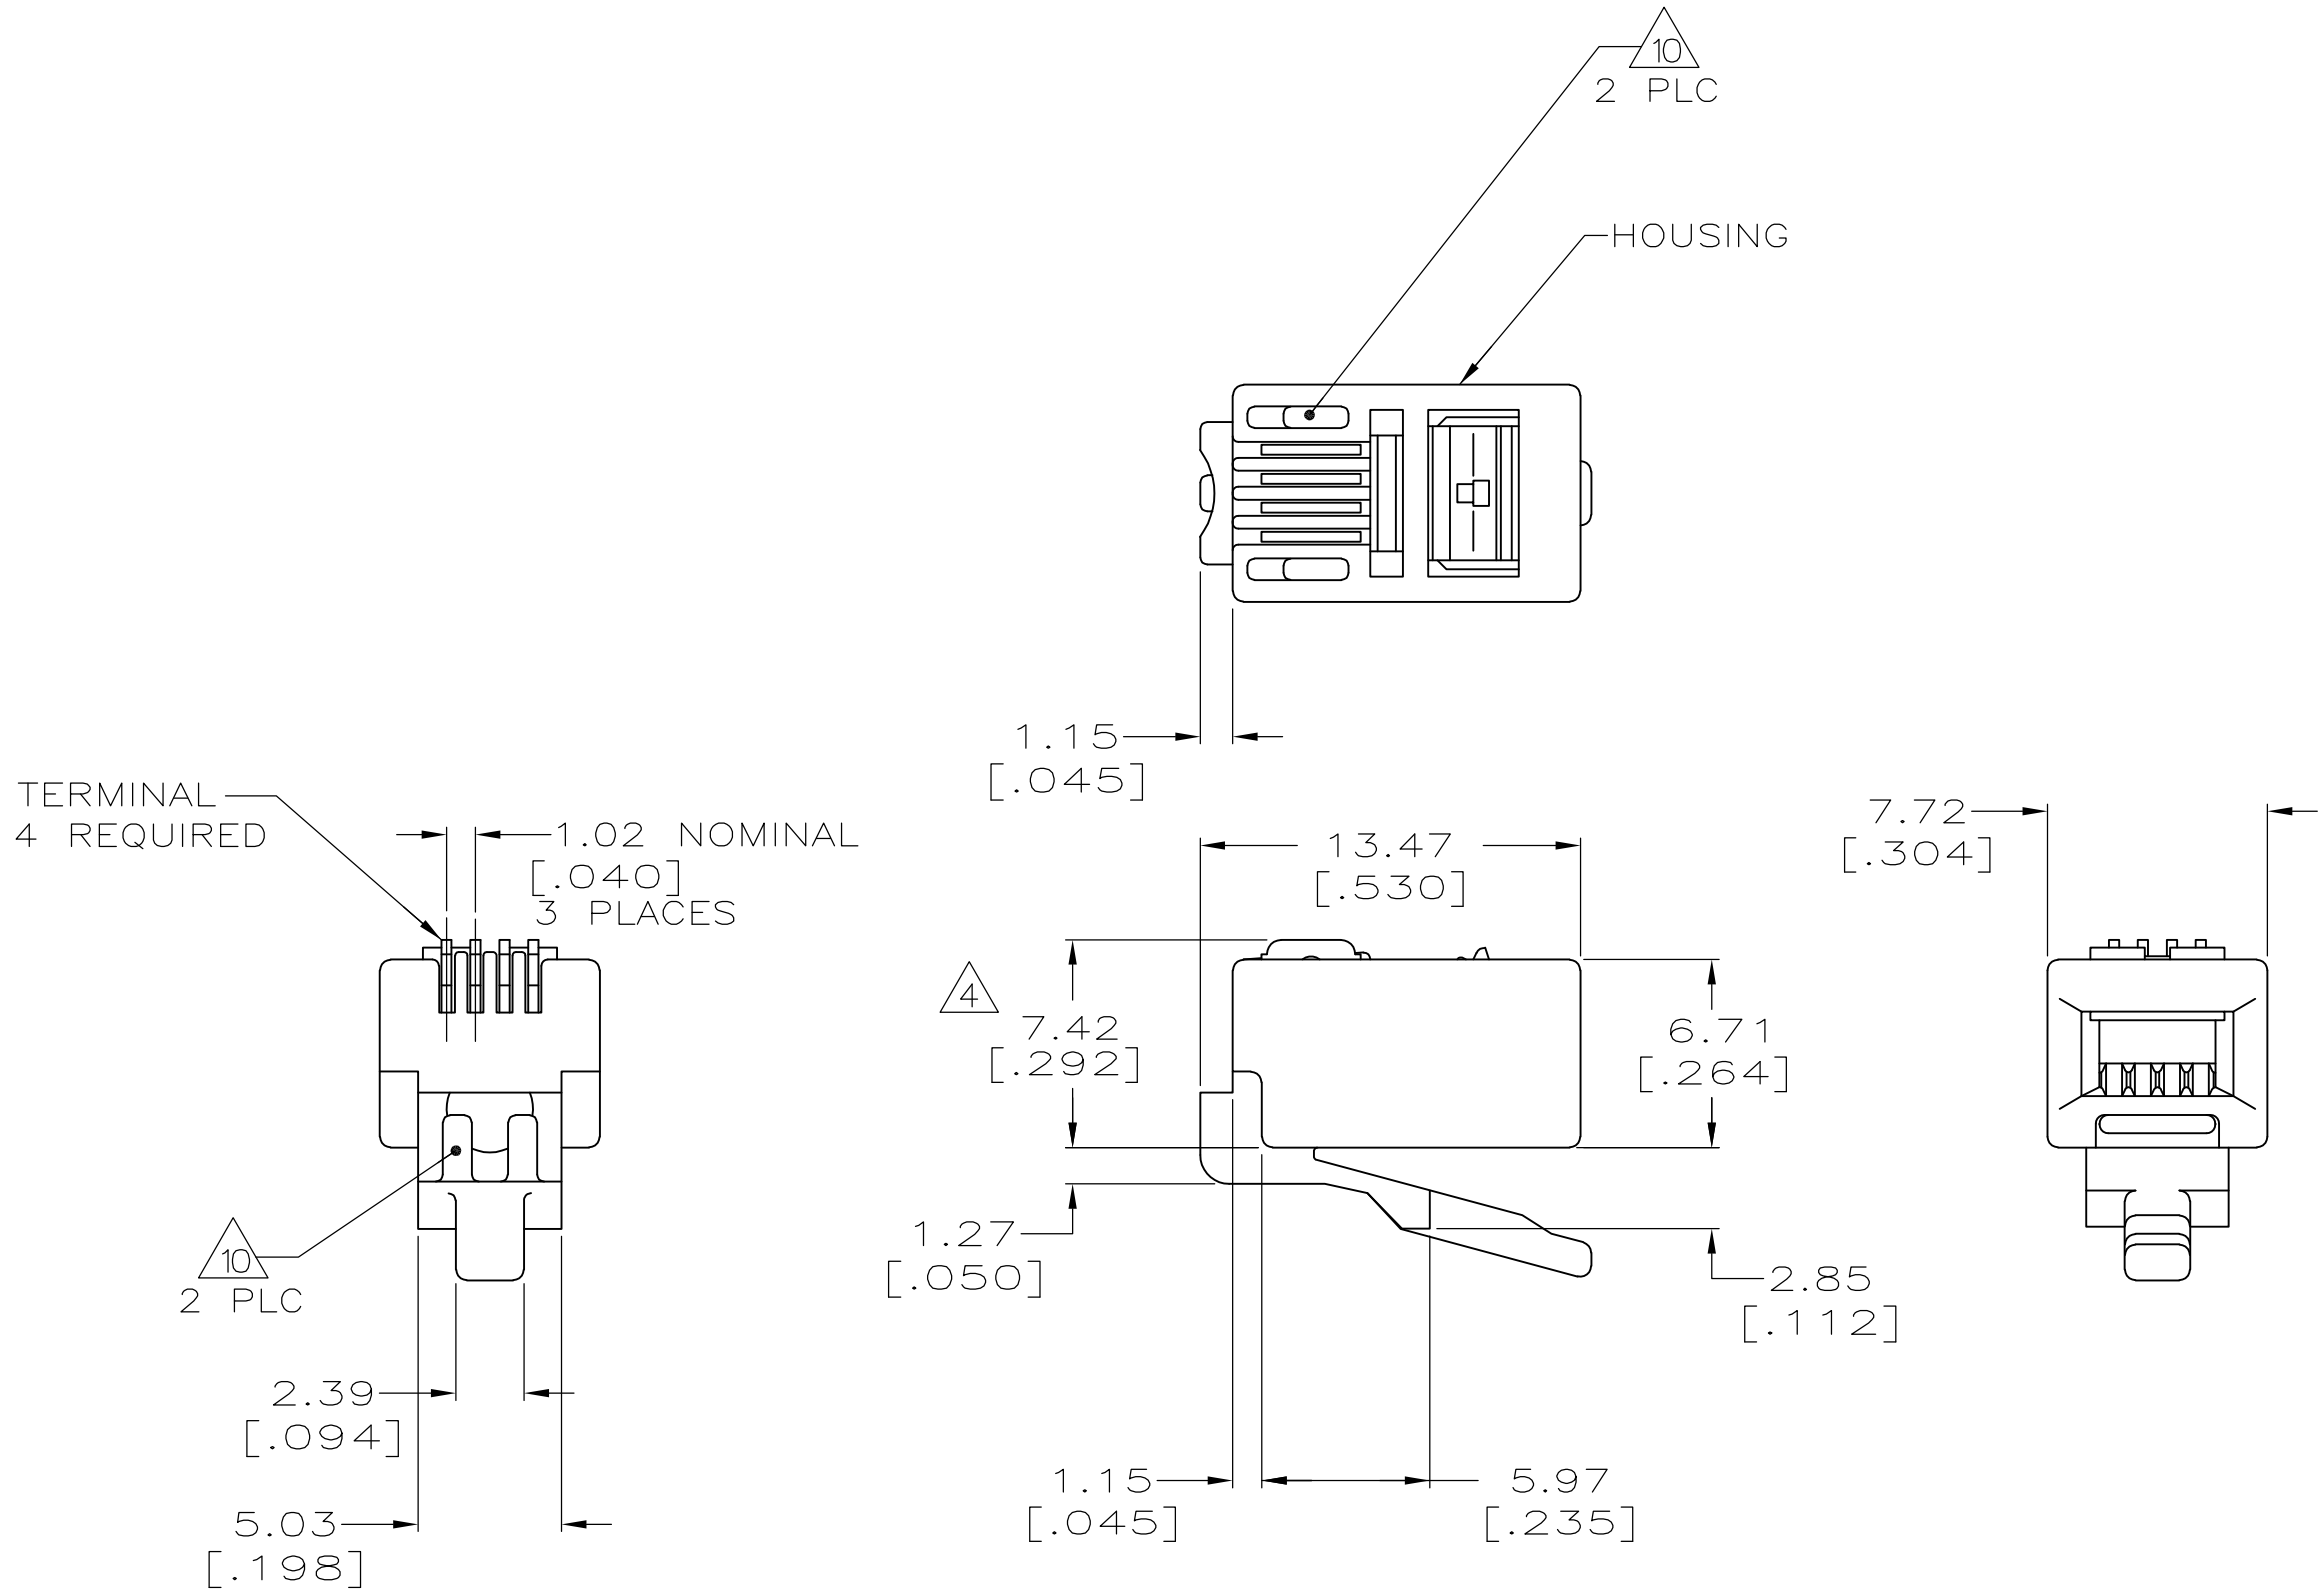

- 1

DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2

MATERIAL: HOUSING—POLYCARBONATE,CLEAR.
TERMINAL—0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27 μ m[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA, OVER 2.54 μ m[.000100] THICK NICKEL UNDERPLATE.
3.

PLUG WILL ACCEPT 26 OR 28 AWG STRANDED WIRE, 0.99[.039] MAX INSULATION DIAMETER, WITH A 2.29 X 4.83 [.090 X .190] OVAL JACKET.
- 4

TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- 6


10,000 ASSEMBLES PER PACKAGE.
- 7

1000 ASSEMBLIES PER PACKAGE.
- 8

100 ASSEMBLIES PER PACKAGE.

SUPERSEDED BY 5-641334-2

8	5-641334-3
7	5-641334-2
6	5-641334-1
REELED 10	641334-1
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YTP/UTA 8-31-93	 TE Connectivity				
DIMENSIONS: mm[INCHES]		CHK C.WHITT 9-15-93	NAME MODULAR PLUG ASSEMBLY, 4 POSITION, HANDSET				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD —					PRODUCT SPEC 108-1163
	0 PLC ± -  1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH	—					
MATERIAL - 		WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C-641334	RESTRICTED TO —	
CUSTOMER DRAWING					SCALE 4:1	SHEET 1 of 1	REV AB