


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00	S		REV PER ECO-12-012918	05JUL2012	JM	JG

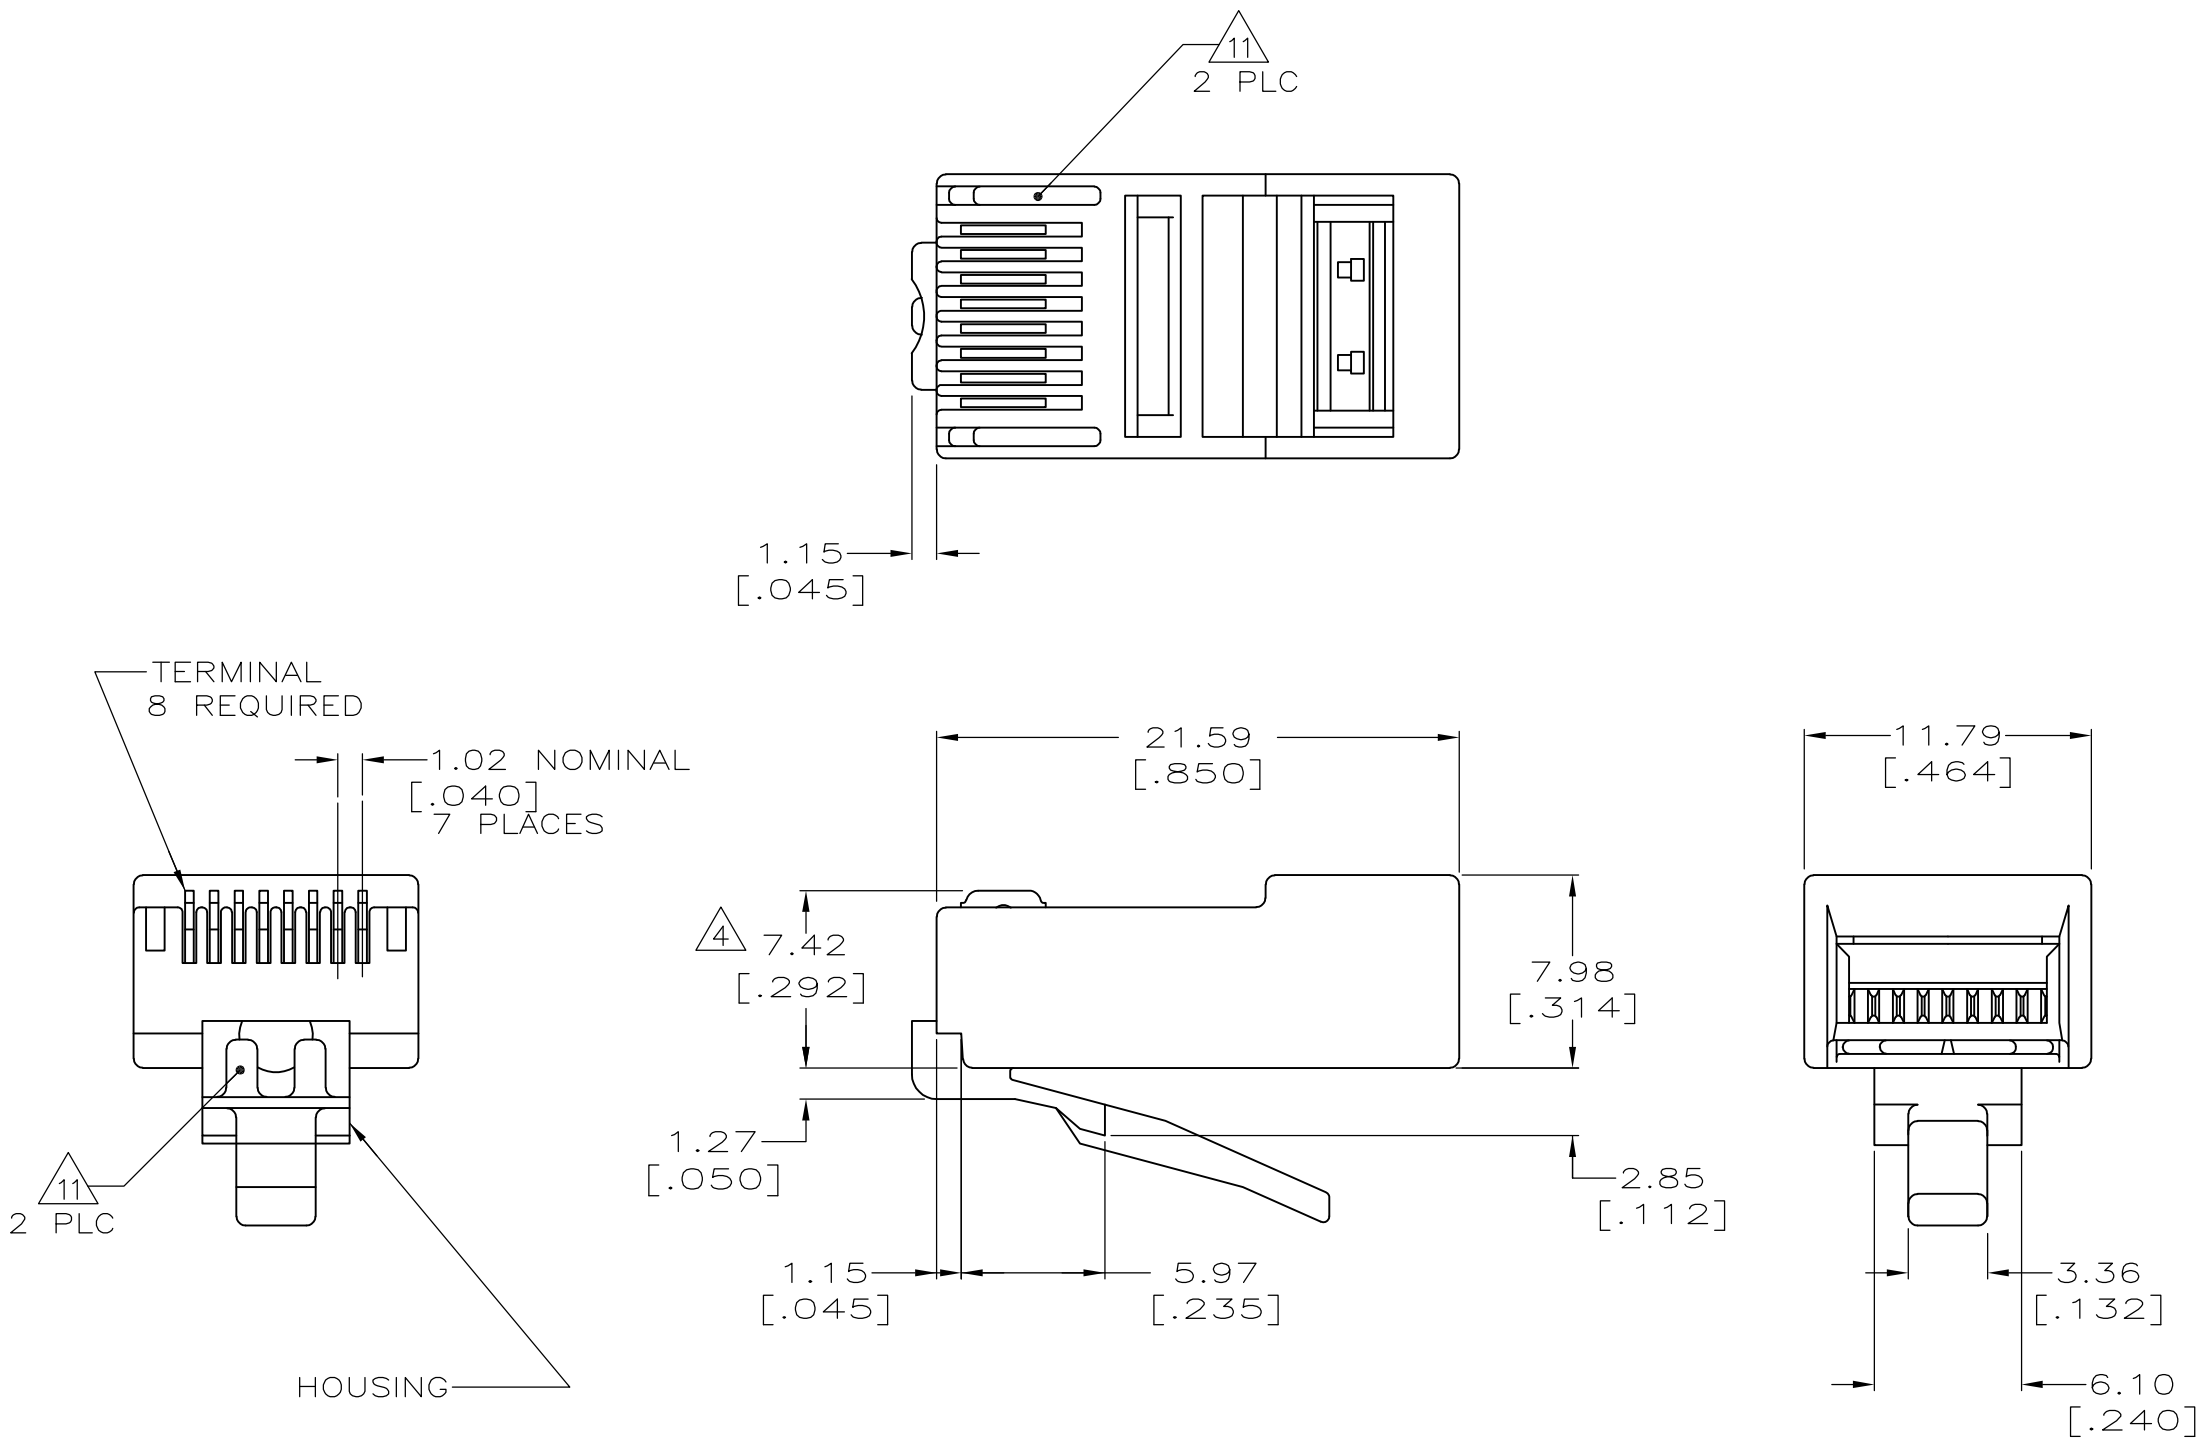

1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
2. MATERIAL: HOUSING-POLYCARBONATE,CLEAR. TERMINAL-0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27μm[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA,OVER 2.54μm[.000100] THICK NICKEL UNDERPLATE.
3. PLUG WILL ACCEPT 26 OR 28 AWG STRANDED WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.89-0.99[.035-.039] AND A MAXIMUM OVAL CABLE JACKET OF 2.54 X 8.89[.100 X .350].
4. TERMINATED DIMENSION 6.15[.242] MAXIMUM.
6. 10,000 ASSEMBLIES PER PACKAGE.
7. 500 ASSEMBLIES PER PACKAGE.
8. 100 ASSEMBLIES PER PACKAGE.

8	5-554739-3
7	5-554739-2
6, 11	5-554739-1
REELED	554739-1
PACKAGED	PART NUMBER

SUPSD BY 5-554739-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YTP/UTA 8-27-93	TE Connectivity			
		CHK C.WHITT 9-15-93				
DIMENSIONS: mm[INCHES]		APVD TONEY/MCGRATH 9-20-93	NAME			
		PRODUCT SPEC	MODULAR PLUG ASSEMBLY, 8 POSITION, FLAT OVAL CABLE			
		108-1163				
MATERIAL		APPLICATION SPEC	SIZE			
-		114-6016	A2			
FINISH		WEIGHT	CAGE CODE			
-		-	00779			
		CUSTOMER DRAWING	DRAWING NO			
			554739			
			RESTRICTED TO			
			-			
			SCALE			
			4:1			
			SHEET			
			1 OF 1			
			REV			
			S			