




	ITEM ①	ITEM ②
PART NUMBER	BODY	CONTACT
108-11XX-001	NYLON	BRASS SILVER PL .0001 MIN

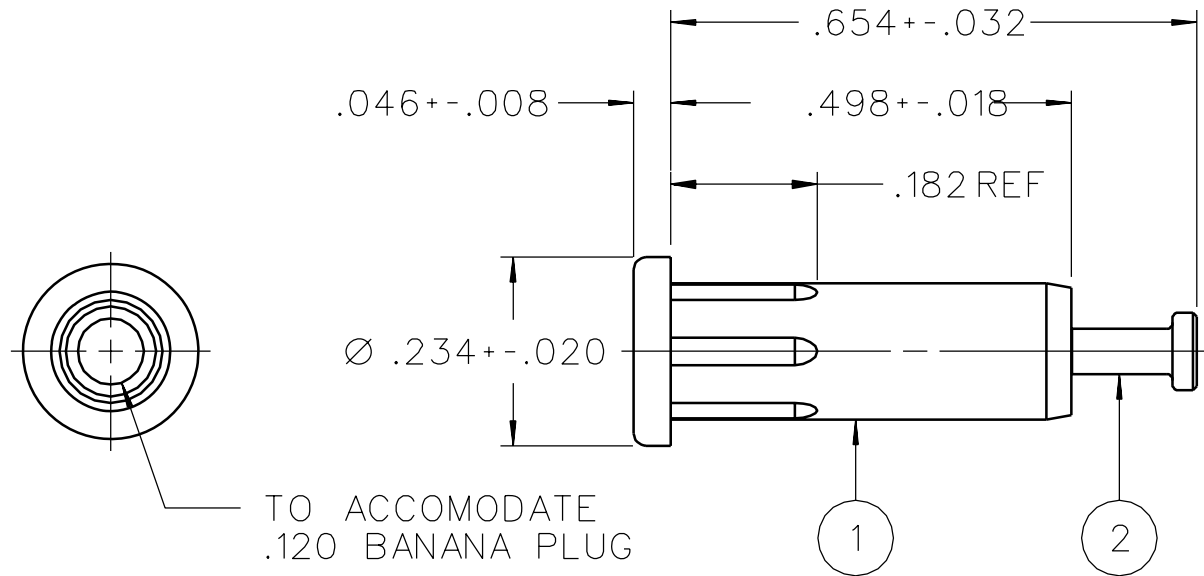

NOTES:

1. SPECIFICATIONS:
- MECHANICAL:
- TORQUE: 12 OZ IN MIN REQUIRED TO TURN CONTACT IN BODY
TORQUE: 12 OZ IN MIN REQUIRED TO TURN BODY IN PANEL
PUSHOUT FORCE: 20 LBS MIN REQUIRED TO REMOVE CONTACT FROM BODY
PUSHOUT FORCE: 15 LBS MIN REQUIRED TO REMOVE BODY FROM PANEL
- ELECTRICAL:
- DIELECTRIC WITHSTANDING VOLTAGE: 3500 VRMS MIN
CURRENT RATING: 10 AMPS MIN
CONTACT RESISTANCE: 10 MILLIOHMS MAX
CAPACITANCE: 2.0 pF NOMINAL
INSULATION RESISTANCE: 5000 MEGOHMS MIN
- ENVIRONMENTAL:
- LIFE EXPECTANCY: 5000 CYCLES MIN
TEMPERATURE RANGE: -55 TO 85 C
VIBRATION: 10 TO 55 Hz MIN
SHOCK: 100 g's MIN

CATALOG DESIGNATION FOR VARIOUS COLORED BODIES	
PART NUMBER	COLOR
108-1101-001	WHITE
108-1102-001	RED
108-1103-001	BLACK
108-1104-001	GREEN
108-1105-001	
108-1106-001	ORANGE
108-1107-001	YELLOW
108-1108-001	BROWN
108-1109-001	LIGHT GREEN
108-1110-001	BLUE
108-1111-001	
108-1112-001	VIOLET
108-1113-001	GRAY

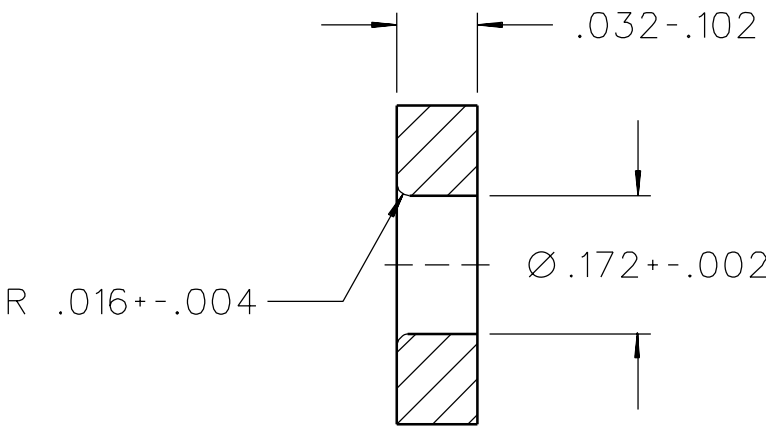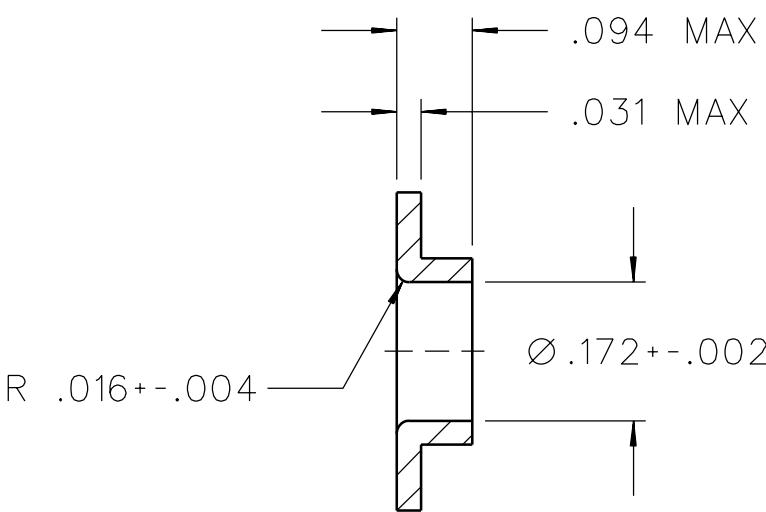

MOUNTING HOLE OPTIONS

DRAWING NO.	1101
C - 108- 1120 -001	
0	REVISIONS
ENGINEERING RELEASE	
06	08-29-89 E J R G M A 1-17-90 J R F S Q W ECO 24319
ADDED: .654+-.032 .182 REF DELETED: .700+-.015 CHANGED: DIA .234+-.020 WAS DIA .218 +-.010, .046+-.008 WAS .046+-.010, .498+-.010 WAS .491+-.015	
7	1-27-93 R H D R J B ECO 41560

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY E J		DATE 9-12-89		 Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256			
DECIMALS		CHECKED BY RRF		DATE 1-12-90					
.XX		mm		TITLE MINIBANANA JACK, RIB-LOC FOR .120 BANANA PLUG		SHEET 2 OF 2		DRAWING NO. C - 108-1101/1120-001	
.XXX		mm							
MATL		APPROVED BY GSQ		DATE 1-12-90					
FINISH		RELEASE DATE 1-17-90							
		U/M INCH		SCALE 4:1					