


|              |                                                                                                                                                                 |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PART NUMBER  | ITEM ①<br>UMC TO SMA JACK CONVERSION ADAPTER                                                                                                                    |
| 134-1019-361 | BODY - STAINLESS STEEL - GOLD PLATED<br>CONTACT - BRASS - GOLD PLATED<br>NUT - STAINLESS STEEL - PASSIVATED<br>INSULATOR - FLUORINE PLASTICS<br>GASKET - RUBBER |

|                      |         |             |             |             |             |  |          |           |  |
|----------------------|---------|-------------|-------------|-------------|-------------|--|----------|-----------|--|
| DRAWING NO.          |         |             |             |             |             |  |          |           |  |
| B - 134-1019-361/370 |         |             |             |             |             |  |          |           |  |
| 0                    |         | REVISIONS   |             |             |             |  |          |           |  |
| ENGINEERING RELEASE  |         |             |             |             |             |  |          |           |  |
| 1                    | 12-1-06 | P<br>A<br>T | S<br>B<br>D | R<br>J<br>B | P<br>D<br>W |  | 12-27-06 | ECN 50793 |  |

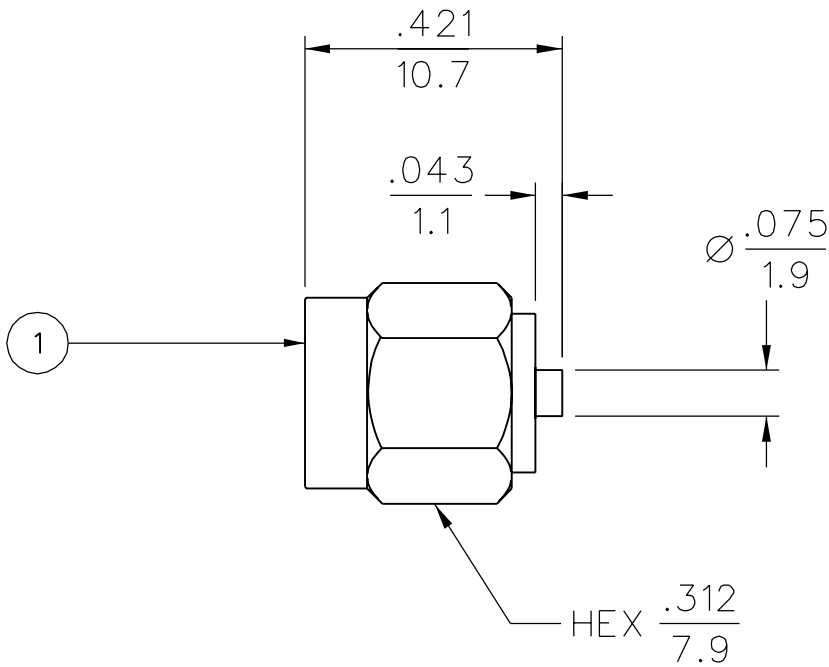

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS  
FREQUENCY RANGE: 0-6 GHz  
VSWR: 1.30 MAX AT 0-6 GHz

MECHANICAL (UMC):

COMPATIBILITY: MATES WITH U.FL SERIES  
DISENGAGEMENT FORCE (MIN): 0.15 N (FEMALE CONTACT)  
DURABILITY: 3000 CYCLES

ENVIRONMENTAL:

TEMPERATURE RANGE: -40° C TO +90° C

2. APPLICATION:

PLEASE USE THIS CONNECTOR FOR  
MEASURING THE PROPAGATION  
PERFORMANCE.

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED  
PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

|                                      |       |                          |                  |                                                                                                                                                                            |                                    |
|--------------------------------------|-------|--------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED |       | DRAWN BY<br>SBD          | DATE<br>11/29/06 |  <b>Connectivity Solutions</b><br>P.O. Box 1732<br>Waseca, MN 56093<br>1-800-247-8256 |                                    |
| DECIMALS                             | mm    | CHECKED BY<br>RJB        | DATE<br>12-13-06 |                                                                                                                                                                            |                                    |
| .XX                                  | _____ |                          |                  | TITLE<br>UMC JACK TO SMA PLUG<br>CONVERSION JACK ADAPTER                                                                                                                   |                                    |
| .XXX REF                             | _____ | APPROVED BY<br>PDW       | DATE<br>12-22-06 |                                                                                                                                                                            |                                    |
| MATL<br>_____                        |       | RELEASE DATE<br>12-27-06 |                  | SHEET<br>2 OF 2                                                                                                                                                            | DRAWING NO.<br>B- 134-1019-361/370 |
| FINISH<br>_____                      |       | U/M INCH/mm              | SCALE 3:1        |                                                                                                                                                                            |                                    |