


PART NUMBER	ITEM ① BODY	ITEM ② NUT	ITEM ③ CONTACT	ITEM ④ INSULATOR	ITEM ⑤ RETENTION SPRING	ITEM ⑥ GASKET
141-0693-001	STAINLESS STEEL GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER	STAINLESS STEEL GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER	BRASS GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	BERYLLIUM COPPER UNPLATED	SILICONE RUBBER
141-0693-002	STAINLESS STEEL GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER	STAINLESS STEEL PASSIVATED	BRASS GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	BERYLLIUM COPPER UNPLATED	SILICONE RUBBER

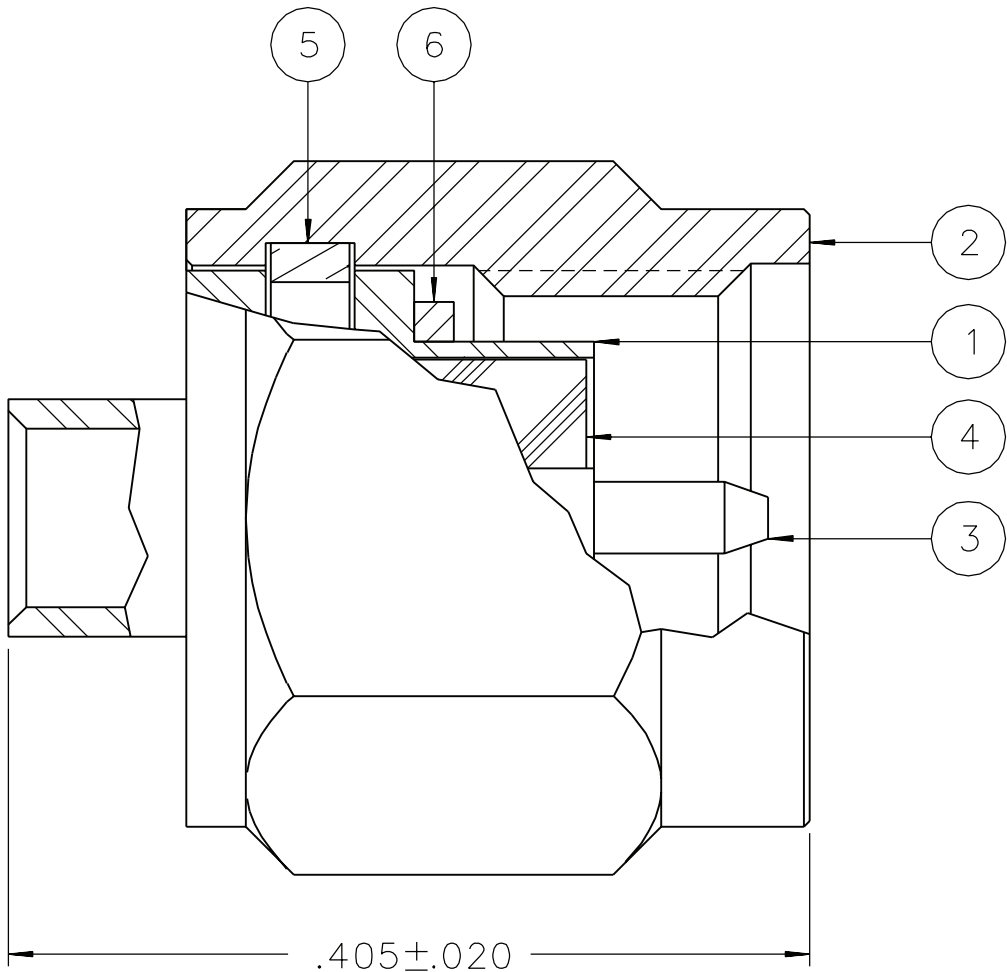

NOTES:


1. SPECIFICATIONS:
- IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-26.5 GHZ
VSWR: 1.07+.008F MAX (F IN GHZ) (0-18 GHZ).135 MAX (18-26.5 GHZ)
WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHM MIN
CONTACT RESISTANCE:
 CENTER CONTACT - INITIAL 3.0 MILLIOHM MAX, AFTER ENVIRONMENTAL 4.0 MILLIOHM MAX
 OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
 BODY TO CABLE - 0.5 MILLIOHM MAX
CORONA LEVEL: 250 VOLTS MIN AT 70,000 FEET
INSERTION LOSS: .03vF (F IN GHZ) AT 10 GHZ
RF LEAKAGE: -90 DB MIN AT 2.5 GHZ
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 670 VRMS MIN AT 4 AND 7 MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 IN-LBS MAX
MATING TORQUE: 7-10 IN-LBS
COUPLING PROOF TORQUE: 15 IN-LBS MIN
COUPLING NUT RETENTION: 60 LBS MIN
CONTACT RETENTION: NOT APPLICABLE
CABLE ACCEPTABILITY: RG 405 DIA .086 SEMIRIGID
CABLE HEX CRIMP SIZE: NOT APPLICABLE
CABLE RETENTION: 30 LBS MIN AXIAL FORCE
16 INCH-OUNCE MIN TORQUE
DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012)
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B,
 EXCEPT 115°C HIGH TEMP
OPERATING TEMPERATURE: -65°C TO 165°C
CORROSION: MIL-STD-202, METHOD 101, CONDITION B
SHOCK: MIL-STD-202, METHOD 213, CONDITION I
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

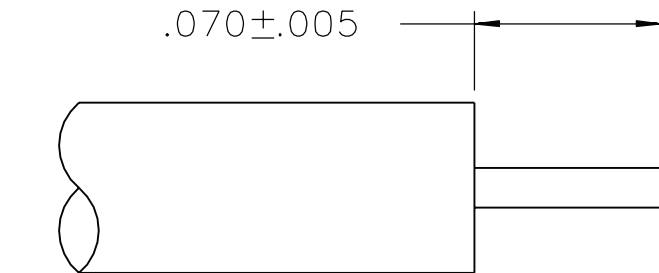

CABLE STRIP DIMENSIONS

DRAWING NO. C - 141-0693-001/010	
0	REVISIONS
ENGINEERING RELEASE	
01	01-15-90EJLB RJAW01-16-90ECO 24292
ADDED: 115 DEG C HIGH TEMP TO THERMAL SHOCK SPEC. GASKET.	
02	02-26-90EJLB RJAW03-21-90ECO 24397
CHANGED: 10 GHZ WAS 9 TO 12.4 GHZ. DELETED: .296+- .010	
03	11-20-90RHJB A W11-26-90ECO 24964
DELETED: "COPPER PL .00005 MIN FROM ITEMS 1 AND 2 CHANGED: LEAKAGE @ 2.5 GHZ WAS 2-3, HIGHPOT @ 4 AND 7 MHZ WAS 5-7.5	
4	11-27-91RHJA RHE M12-30-91ECO 40697
CHANGED: FREQUENCY RANGE 0-26.5 GHZ WAS 0-18 GHZ ADDED: (0-18 GHZ), 1.35 MAX (18-26.5 GHZ) TO VSWR SPEC ***** * REVISION NUMBER FOLLOWED BY AN ALPHA * * CHARACTER INDICATES DRAWING CLARIFI- * CATION OR PART NUMBER ADDITION ONLY. * *****	
4a	2-28-94RHJB42-28-94ECO 42328
GRAPHICS & VERSION UPDATE	
5	12-12-05PAST RJPD W4-18-06ECN 50041

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY Bedney	DATE 2-14-89	 Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256	
DECIMALS .XX _____	mm _____	CHECKED BY	DATE		
.XXX _____	_____	APPROVED BY RJB/GLD	DATE 1-15-90	TITLE PLUG ASSEMBLY, STRAIGHT CABLED SMA, RG 405	
MATL _____	_____	RELEASE DATE	1-16-90	SHEET 2 OF 2	DRAWING NO. C - 141-0693-001/010
FINISH _____	_____	U/M	INCH		
			SCALE 10:1		