



PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR
142-D594-001	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON
142-D594-006	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON



CABLE STRIP DIMENSIONS

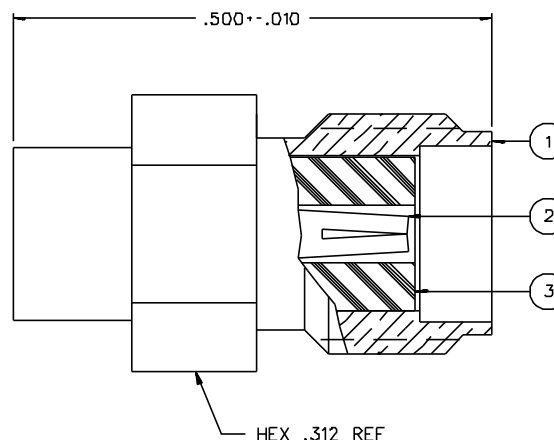

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-18.0 GHZ
VSWR: 1.05-.0DBF MAX (F IN GHZ)
WORKING VOLTAGE: 500 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHM MIN
CONTACT RESISTANCE:
CENTER CONTACT - INITIAL 3.0 MILLIOHM MAX, AFTER
ENVIRONMENTAL 4.0 MILLIOHM MAX
OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX
AFTER ENVIRONMENTAL NOT APPLICABLE
BODY TO CABLE - 0.5 MILLIOHM MAX
CORONA LEVEL: .375 VOLTS MIN AT 70,000 FEET
INSERTION LOSS: .03DB (F IN GHZ) AT 1 GHZ
RF LEAKAGE: -90 DB MIN AT 2 TO 3 GHZ
MAXIMUM POTENTIAL WITHSTANDING VOLTAGE: 1000 VRMS MIN AT 5 TO 7.5 MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 INCH-POUNDS MAX
 MATING TORQUE: 7-10 INCH POUNDS
 COUPLING PROOF TORQUE: NOT APPLICABLE
 COUPLING NUT RETENTION: NOT APPLICABLE
 CONTACT RETENTION: NOT APPLICABLE
 CABLE ACCEPTABILITY: RC 402 DIA .141 SEMI RIGID
 CABLE HEX CRIMP SIZE: NOT APPLICABLE
 CABLE RETENTION: 6D LBS MIN AXIAL FORCE
 55 INCH-OUNCE MIN TORQUE
 DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39D12)
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B,
EXCEPT 115° C HIGH TEMP
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
CORROSION: MIL-STD-202, METHOD 101, CONDITION B
SHOCK: MIL-STD-202, METHOD 213, CONDITION 1
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

DRAWING NO.									
C - 142-0594-001/010									
0		REVISIONS							
ENGINEERING RELEASE									
1	12-06-88	E	A	N	A			12-14-88	ECO 23717
VERSION UPDATE									
2	03-09-89	E	A	N	A			04-10-89	ECO 23882
ADDED: 115" C HIGH TEMP TO THERMAL SHOCK SPEC.									
3	06-06-90	E	B	B	A			7-3-90	ECO 24436
CHANGED: .D85--.005 WAS .085-- .015. 10 GHZ WAS 9 TO 12 GHZ. DELETED: .424--.D10 ADDED: HEX .312 REF									
4	11-18-90	R	B					11-26-90	ECO 24971
VERSION UPDATE									
5	9-6-91	D	B					ECO 40499	
UPDATED COMPANY LOGOS									
* REVISION NUMBER FOLLOWED BY AN ALPHA *									
* CHARACTER INDICATES DRAWING CLASS *									
* CATION OR PART NUMBER ONLY.									

5a	5-2-02	R						5-24-02	ECN 4386

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1982

" μ STATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY RER		DATE 2-19-87		 288 Johnson Ave. P.O. Box 1732 Waseca, MN 56093-0832	
DECIMALS _____ mm .XX _____ .XXX _____ MATL _____ FINISH _____		CHECKED BY		DATE		TITLE JACK ASSEMBLY, STR CABLED, SMA, RG 402	
		APPROVED BY TAK		DATE 12-7-88			
		APPROVED BY RJB		DATE 12-7-88			
		RELEASE DATE		12-14-88		CODE NO. _____ DRAWING NO. C - 142-0594-001/010	
				SCALE 10:1		U/M INCH SHEET 2 OF 2	