

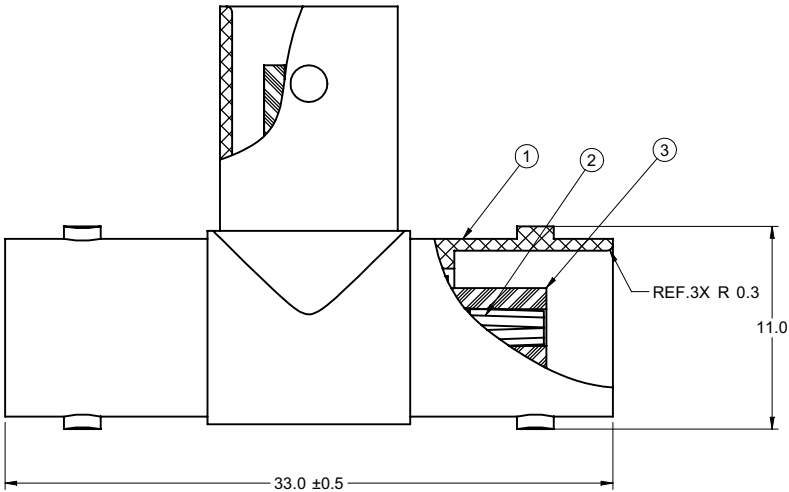


PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR
27-8141	ZINC NICKEL PLATED	BERYLLIUM GOLD PLATED	TPX

受控 CONTROLLED DOCUMENT				
编号 P/N	27-8141	版本 Rev	01	日期 Rel'd Date
May8,09				

DRAWING NO. 27-8141	
REVISIONS	
01	OFFICIAL RELEASE
04-13-09	04-13-09

Thomas Chow
2009.05.04
14:40:40 +08'00'

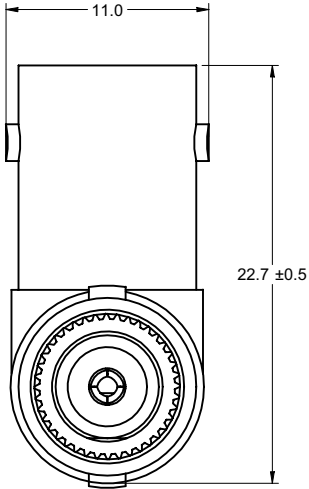

NOTES:

1. IMPEDANCE: 50 OHMS NOMINAL
2. FREQUENCY RANGE: 0-4 GHz
3. RECOMMENDED TEMPERATURE RANGE: -55 °C TO +85°C
4. FURTHER TECHNICAL DETAIL: REFER TO EMERSON DOCUMENT P/N 27-0000

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY GARY.ZHG	DATE 04-13-09
DECIMALS	mm	CHECKED BY BETTY.YU	DATE 04-13-09
X	± 0.5	APPROVED BY THOMAS	DATE 04-13-09
X.X	± 0.2	U/M	mm
X.XX	± 0.1		
ANGLES	± 0.5°		

THIS DRAWING WAS PRODUCED BY COMPUTER.
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

 EMERSON Network Power		Connectivity Solutions	
TITLE 50 OHM BNC T ADAPTER			
SHEET 1 OF 1	DRAWING NO. 27-8141		SIZE C