

5

4

3

2

1

受控 CONTROLLED DOCUMENT

编号
P/N32-
5901UL版本
Rev

0A

日期
Rel'd Date

Mar 24,08

DRAWING NO.
32-5910UL

0

REVISIONS

A

RELEASE FOR QUTATION

10-24-05

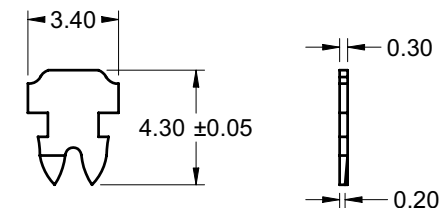

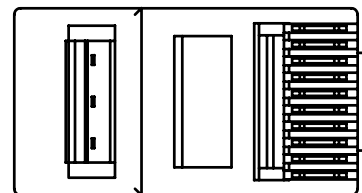
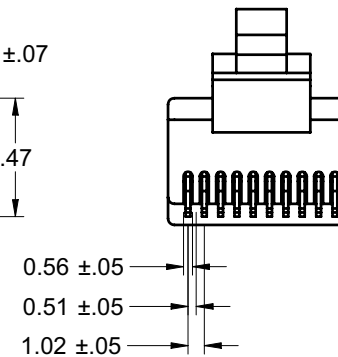
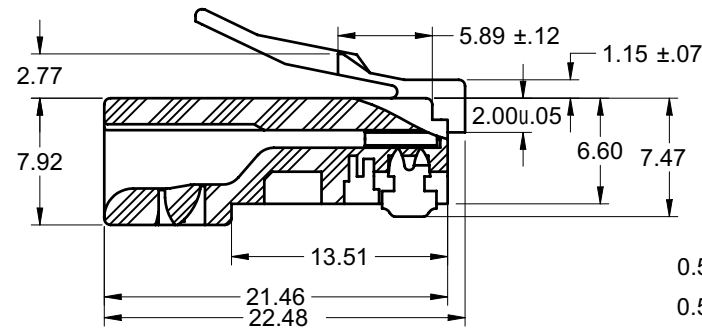
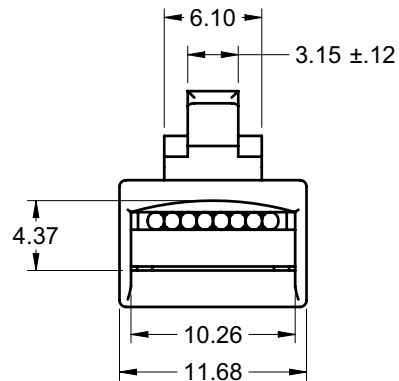
Y

U

W

T

17:37:58 10/24/05

Thomas Chow
2005.10.24
17:37:58 10/24/05

CONTACT

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100
MICRO-INCH NICKEL PLATING

HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABILY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

4. FOR SOLID OR STRANDED WIRE APPLICATIONS

5. FOR FLAT OVAL OR ROUND CABLE

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
		BETTY.YU	10-24-05
DECIMALS	mm	CHECKED BY	DATE
X	± 0.5	Ivon.Wang	10-24-05
X.X	± 0.15	APPROVED BY	DATE
X.XX	± 0.10	THOMAS	10-24-05
ANGLES	± 0.5°	U/M: mm	
THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.			

		Connectivity Solutions	
TITLE		10C MOD PLUG FOR ROUND CBL	
SHEET	DRAWING NO.	SIZE	
1 OF 1	32-5910UL	C	