
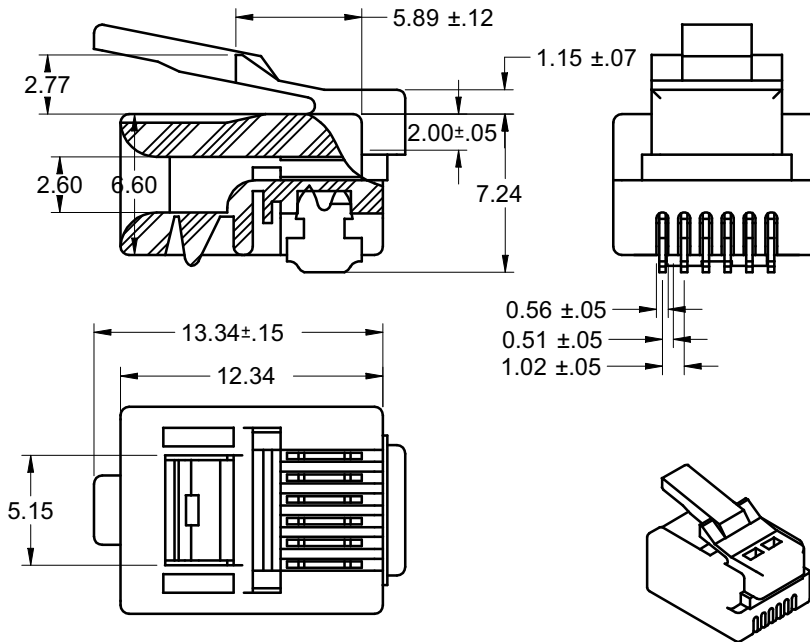
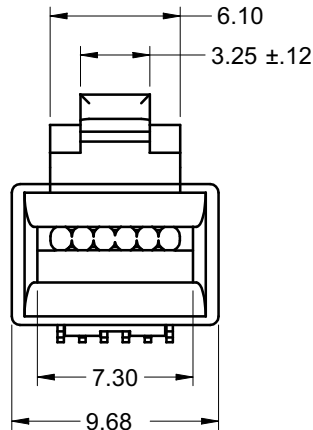


受控 CONTROLLED DOCUMENT					
编号 P/N	32-5956U L	版本 Rev	01	日期 Rel'd Date	SEP 14,09



NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHOMS
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100
MICRO-INCH NICKEL PLATING
HOUSING MATERIAL: POLYCARBNATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABILY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70°C

DRAWING NO. 32-5956UL									
REVISIONS									
OFFICIAL RELEASE									
01	04-15-09	T	W	T					2009.04.15 <i>Betty</i> 08.44.32 + 08.00

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1982

Solid Edge

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE	 Connectivity Solutions	
DECIMALS	mm	TERRY.W	04-15-09		
.X	± 0.15	CHECKED BY	DATE	TITLE RJ12 MOD PLUG 50°U,STR,FLAT	
.XX	±0.10	TERRY.W	04-15-09		
MATL		APPROVED BY	DATE	SHEET 1 OF 1	
		THOMAS	04-15-09		
FINISH		RELEASE DATE :	08-31-05	DRAWING NO. 32-5956UL	
		U/M	mm	SCALE	4:1