

5

4

3

2

1







受控 CONTROLLED DOCUMENT

编号 P/N	32-5996UL	版本 Rev	01	日期 Rel'd Date	SEP 14,09
-----------	-----------	-----------	----	------------------	-----------

DRAWING NO.
32-5996UL

REVISIONS

01	OFFICIAL RELEASE				2009.09.01 08:44:01 Betty
	08-25-09	Y	T	T	

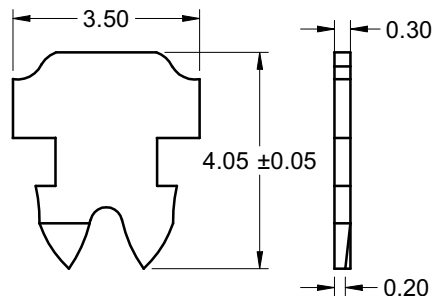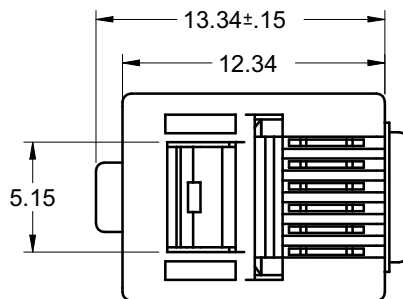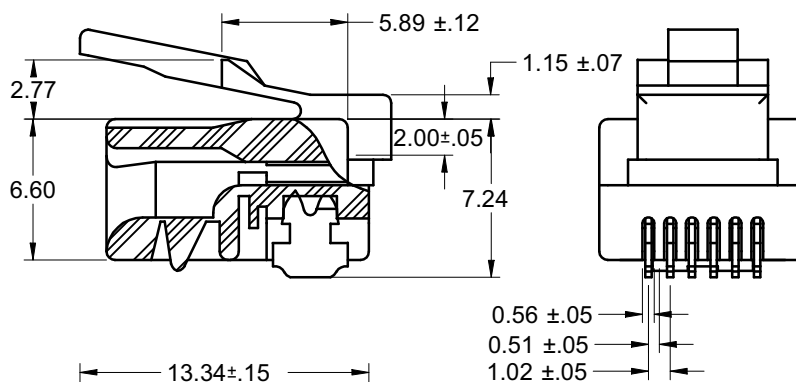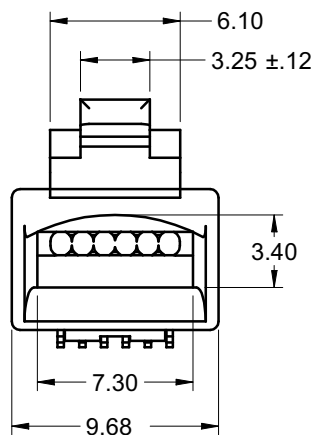

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100
MICRO-INCH NICKEL PLATING
HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABLY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS		BETTY.YU	08-25-09
X		CHECKED BY	DATE
± 0.5		TERRY.W	08-25-09
X.X		APPROVED BY	DATE
± 0.15		THOMAS	08-25-09
X.XX		U/M:	mm
± 0.10			
ANGLES			
± 0.5°			
THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.			

		Connectivity Solutions	
TITLE		RJ12 MOD PLUG 50°U,SOL/STR,FLT	
SHEET	DRAWING NO.	SIZE	
1 OF 1	32-5996UL	C	