

受控 CONTROLLED DOCUMENT





编号 P/N	32-5998EUL	版本 Rev	01	日期 Rel'd Date	SEP 14,09
-----------	------------	-----------	----	------------------	-----------

DRAWING NO.
32-5998EUL

REVISIONS

01	RELEASE FOR QUOTATION	2009.09.0	8.08.43.45	08.00
08-23-09	Y	U	W	T

Betty

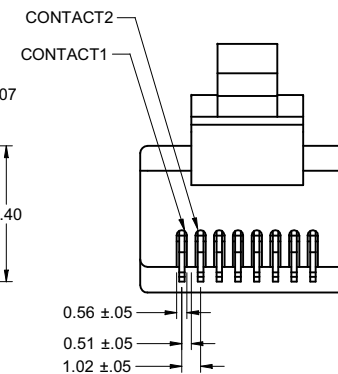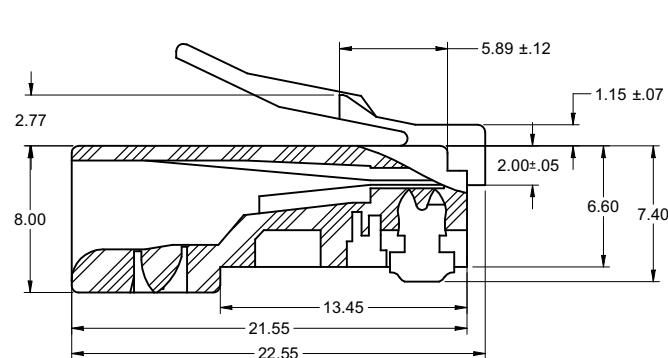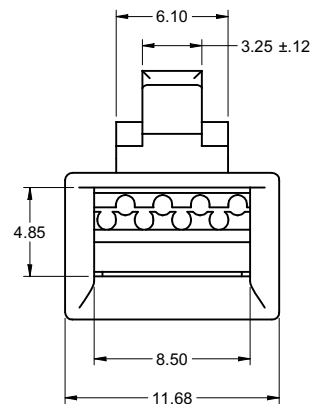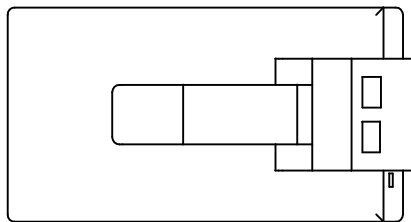

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS



CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100
MICRO-INCH NICKEL PLATING
HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABLY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS


TEMPERATURE RANGE: -40 °C TO +70 °C

4. FOR FLAT OVAL OR ROUND CABLE


5. FOR SOLID OR STRANDED WIRE APPLICATIONS

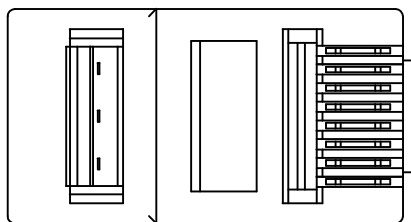

CONTACT1



CONTACT2



TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY BETTY.YU	DATE 08-23-09
DECIMALS	mm	CHECKED BY TERRY.W	DATE 08-23-09
X	± 0.5	APPROVED BY THOMAS	DATE 08-23-09
X.X	± 0.15	U/M	mm
X.XX	± 0.10		
ANGLES	± 0.5°		

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

 EMERSON Network Power		Connectivity Solutions	
TITLE RJ45 MOD PLUG 50"U,SOL/STR,RND			
SHEET 1 OF 1	DRAWING NO. 32-5998EUL		SIZE C

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL