


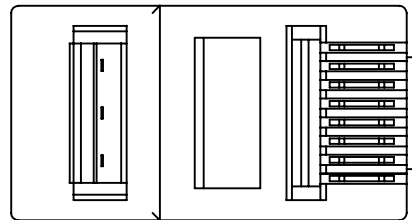
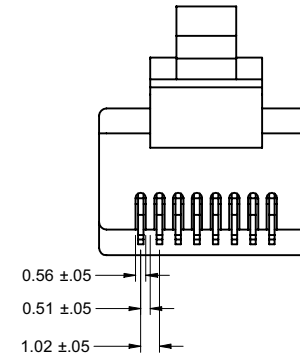
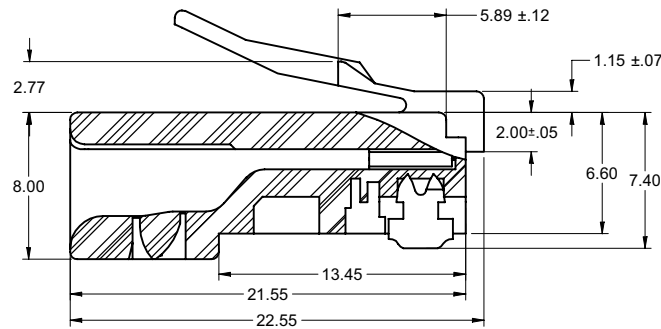


受控 CONTROLLED DOCUMENT					
编号 P/N	32-5998UL	版本 Rev	01	日期 Rel'd Date	May8,09

DRAWING NO. 32-5998UL					
REVISIONS					
01	OFFICIAL RELEASE				
	04-01-09	T	W	T	
					Thomas Chow 2009.05.04 14:47:05 +08'00'

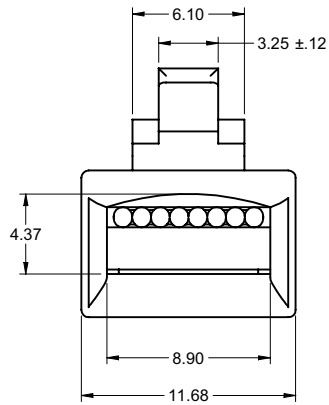

CONTACT



NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100
MICRO-INCH NICKEL PLATING
HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABLY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

4. FOR FLAT OVAL OR ROUND CABLE

5. FOR SOLID OR STRANDED WIRE APPLICATIONS

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY TERRY.W	DATE 04-01-09
DECIMALS	mm	CHECKED BY IVON.W	DATE 04-01-09
X	± 0.5	APPROVED BY THOMAS	DATE 04-01-09
X.X	± 0.15		
X.XX	± 0.10		
ANGLES	± 0.5°	U/M	mm

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

 EMERSON Network Power		Connectivity Solutions	
TITLE RJ45 MOD PLUG 50"U,SOL/STR,FLAT			
SHEET 1 OF 1	DRAWING NO. 32-5998UL		SIZE C