



RED INDICATES ORIGINAL

DWG
SIZE
C

DATA CONTAINED IN THIS DOCUMENT IS
PROPRIETARY TO TROMPETER ELECTRONICS INC.
AND SHALL NOT BE DISCLOSED, COPIED OR USED
FOR REPRODUCTION OR MANUFACTURE WITHOUT
EXPRESS WRITTEN PERMISSION.

REVISIONS				12-01		SH 1
REV	ED	DESCRIPTION		OWN	APPROVED	DATE
J	11191	ADDED CJ70TL, -201 THRU -220; ADDED ITEM 34; SEE ECO		OKC	Bm; Fw	10/26/95


P2 CONN TYPE	FIG NO	P1 CONN TYPE																			
		BJ20					UBJ20					BJ40					UBJ40				
		SCHEMATICS																			
		E1	E2	E3	E4	E5	E1	E2	E3	E4	E5	E1	E2	E3	E4	E5	E1	E2	E3	E4	E5
		DASH NUMBERS																			
BJ74	1A	-1	-2	-3	-4	-169	-5	-6	-7	-8	-170	-9	-10	-11	-12	-171	-13	-14	-15	-16	-172
BJ74TL	1A	-17	-18	-19	-20	-173	-21	-22	-23	-24	-174	-25	-26	-27	-28	-175	-29	-30	-31	-32	-176
BJ74FL	1A	-33	-34	-35	-36	-177	-37	-38	-39	-40	-178	-41	-42	-43	-44	-179	-45	-46	-47	-48	-180
BJ74	1B	-49	-50	-51	-52	-181	-53	-54	-55	-56	-182	-57	-58	-59	-60	-183	-61	-62	-63	-64	-184
BJ79	2A	-65	-66	-67	-68	-185	-69	-70	-71	-72	-186	-73	-74	-75	-76	-187	-77	-78	-79	-80	-188
BJ79TL	2A	-81	-82	-83	-84	-189	-85	-86	-87	-88	-190	-89	-90	-91	-92	-191	-93	-94	-95	-96	-192
BJ79FL	2A	-97	-98	-99	-100	-193	-101	-102	-103	-104	-194	-105	-106	-107	-108	-195	-109	-110	-111	-112	-196
BJ79	2B	-113	-114	-115	-116	-197	-117	-118	-119	-120	-198	-121	-122	-123	-124	-199	-125	-126	-127	-128	-200
CJ70	3A	-129	-130	-131	-132	-133	-134	-135	-136	-137	-138	-139	-140	-141	-142	-143	-144	-145	-146	-147	-148
CJ70	3B	-149	-150	-151	-152	-153	-154	-155	-156	-157	-158	-159	-160	-161	-162	-163	-164	-165	-166	-167	-168
CJ70TL	3A	-201	-202	-203	-204	-205	-206	-207	-208	-209	-210	-211	-212	-213	-214	-215	-216	-217	-218	-219	-220

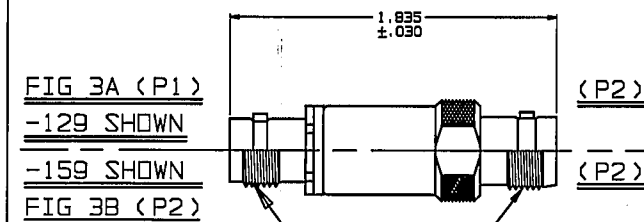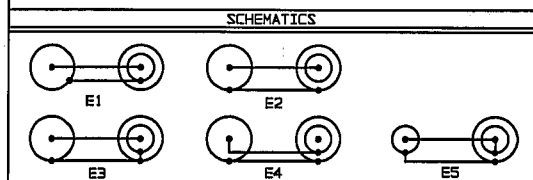

INCH	MM
.005	0.13
.030	0.76
.109	2.77
.140	3.56
.218	5.54
.221	5.61
.281	7.14
.284	7.21
.505	12.83
.510	12.95
.593	15.06
.625	15.88
.630	16.00
.635	16.13
.687	17.45
.750	19.05
.800	20.32
1.835	46.81

△ FOR OPTIONAL GROUND
TERMINAL ADD PREFIX "G"
TO DASH NO (-G1 ETC)

- BETWEEN SERIES ADAPTER,
50 & 75 OHM
BNC/TNC COAXIAL JACK TO
CONCENTRIC TWINAX/TRIAX INSULATED &
NONINSULATED BULKHEAD MOUNT JACK
- FINISH: TFS-1A (NICKEL)
- ALL DIM ARE IN INCHES



RECOMMENDED
PANEL CUTOUT
FOR -1 THRU -64
MAX PNL THK .140




FIG 1A (P1)
-1 SHOWN
-57 SHOWN
FIG 1B (P1)



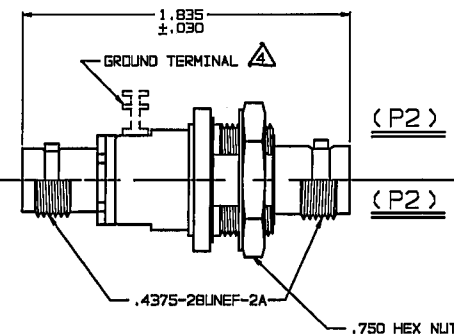


FIG 2A (P1)
-65 SHOWN
-121 SHOWN
FIG 2B (P1)

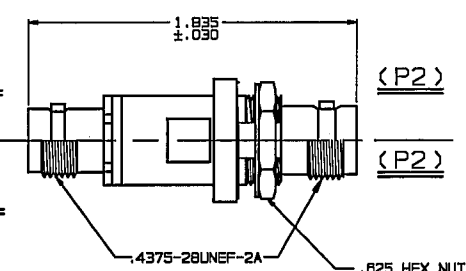

RECOMMENDED
PANEL CUTOUT
FOR -65 THRU -128
MAX PNL THK .160

QTY	DESCRIPTION		PART NUMBER		ITEM
TOL UNLESS SPECIFIED	TROMPETER		ADAPTERS: U/BJ20/40		
.XX ± .005	ELECTRONICS, INC.		TO "70" SERIES		
.XXX ± .0002			BULKHEAD MOUNT		
ANGLE:					
OWN	OKC	8-1-85	MATERIAL	CODE IDENT	DRAWING NO.
CHK	Bm	10-4-95			14949
ENGR					12-01
APPR					J
NEXT ASSY	SCALE 2/1		DATE 6/17/85		SHEET 1 OF 2