

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REV		DESCRIPTION	DWN	APPROVED	DATE
W		REVISED PER ECO 16419	L.M.	<i>mmc</i>	<i>8/22/07</i>

DASH NO	CABLES ACCOMMODATED	A DIM	B DIM	C HEX	D FLATS	E DIA	F DIA MAX	CABLE ENTRY DIA	ASSEMBLE PER
-7	TRC-50-2 TRC-75-2	1.314	.096	.438	.500	.500	.593	.274	TAI-189
-8	8227 BELDEN	1.648	.130	.625	.688	.750	.775	.345	TAI-103
-9	TWC-78-2 TWC-124-2	1.314	.096	.438	.500	.500	.593	.285	TAI-102
-10	RG-22 754E W.E.CO.							.455	
-11	760A W.E.CO.	1.648	.130	.625	.688	.750	.775	.347	TAI-103
-12	16 PEVL W.E.CO. V1-AL GENERAL							.485	TAI-128
-13	TRF-59 TIMES							.362	TAI-129
-13A	8232 BELDEN							.352	TAI-165
-14	8233 BELDEN							.490	TAI-129
-23	250-3884 MICRODDT							.183	TAI-189
-24	202-3934 MICRODDT							.191	TAI-102
-24A	9530A5117 RAYCHEM							.200	TAI-189
-25	T-43M GENERAL							.285	TAI-102
-25A	5021H5331 RAYCHEM								TAI-189
-26	7028A5518 RAYCHEM							.191	
-27	T19TPSJ2619EN WOVEN 202-3927 MICRODDT 202-3942 MICRODDT	1.314	.096	.438	.500	.500	.593	.145	TAI-102
-29	TWC-78-1/TWC-124-1A							.191	
-30	761A W.E.CO. 8441 BELDEN							.235	
-32	TRC-50-1							.191	
-33	TRC-75-1							.217	
-42	21-204 ESSEX 4463 CONSOLIDATED							.300	TAI-189
-43	250-4044/250-4045 293-3930 MICRODDT							.200	
-45	M27500-22TE2T14 1100-66F STANDARD							.183	TAI-102
-46	9860 BELDEN	1.648	.130	.625	.688	.750	.775	.475	TAI-103
-47	M17/176-00002	1.314	.096	.438	.500	.500	.593	.164	TAI-102
-49	TWAC-78-1F2							.132	
-54	89207 BELDEN	1.648	.130	.625	.688	.750	.775	.323	TAI-103
-55	89272 BELDEN							.250	TAI-102
-56	GC875GC1, GRUMMAN							.191	TAI-189
-57	GC875GB1, GRUMMAN								TAI-102
-58	GC875TM24H, GRUMMAN	1.314	.096	.438	.500	.500	.593	.198	
-59	GC875LNI, GRUMMAN								TAI-189
-60	M17/177 THERMATICS							.217	
-64	380-10045 BDEING 7528A5314, RAYCHEM							.183	

MILITARY PART NO (PIN)	MILITARY CABLE PART NO	TROMPETER P/N (REF ONLY)
M49142/06-0001	M17/134-00001	M3-0043-7
M49142/06-0101	M17/134-00001	M3-0043Y-7
M49142/06-0201	M17/134-00001	M3-0043S-7
M49142/06-0002	M17/134-00002	M3-0043-7
M49142/06-0102	M17/134-00002	M3-0043Y-7
M49142/06-0202	M17/134-00002	M3-0043S-7
M49142/06-0007	M17/176-00002	M3-0043-47
M49142/06-0107	M17/176-00002	M3-0043Y-47
M49142/06-0207	M17/176-00002	M3-0043S-47
M49142/06-0008	M17/176-00002	M3-0043-9
M49142/06-0108	M17/176-00002	M3-0043Y-9
M49142/06-0208	M17/176-00002	M3-0043S-9
M49142/06-0009	M17/177-00002	M3-0043-60
M49142/06-0109	M17/177-00002	M3-0043Y-60
M49142/06-0209	M17/177-00002	M3-0043S-60

KEYING LETTER	G DEGREES	H DEGREES	J DEGREES	COLOR BAND
NONE	120°	120°	120°	NONE
T	100°	150°	110°	RED
U	120°	130°	110°	ORANGE
V	115°	130°	115°	YELLOW
W	125°	110°	125°	GREEN
X	130°	100°	130°	BLUE
Y	110°	140°	110°	VIOLET
Z	100°	160°	100°	GRAY
S	135°	135°	90°	WHITE

FIG 2
- 9 SHOWN



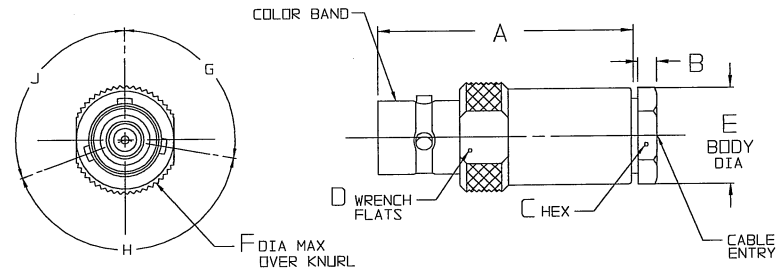


FIG 1
- 9 SHOWN

RED INDICATES ORIGINAL

4. EXAMPLE OF COMPLETE MODEL NUMBER:

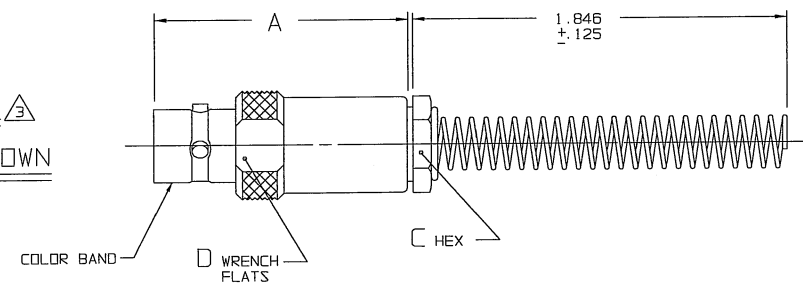

3. FOR BEND RELIEF SPRING (FIG 2) ADD SUFFIX "BR" TO MODEL NO (NOT AVAILABLE WITH CABLE GROUPS -8,-10,-11,-12,-13,-14,-46 AND -54)

2. CONCENTRIC TWINAX/TRIAX TRB CABLE RECEPTACLE

1. FINISH: TFS-1A (NICKEL) 3

3 WHEN CONNECTOR IS SUPPLIED TO MILITARY PART NUMBER (SEE TABLE 2):

- a) ALL PARTS NORMALLY PLATED TFS-1A OR TFS-1U (NICKEL) ARE TO BE PLATED TFS-1M (SILVER)
- b) MARK PART WITH MILITARY PIN (SEE TABLE 2) (NICKEL) AND "14949"
- c) QUALITY CONFORMANCE INSPECTION SHALL BE PER MIL-C-49142 SECTION 4.5

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED	TROMPETER ELECTRONICS, INC.		
.XX ±		CJ70/T/U/V/W	
.XXX ± .005		X/Y/Z/S/BR	
ANGLE ±			
305-0534	DWN L.M. 7-25-07	MATERIAL	CODE IDENT
305-0522	CHK <i>9/28/07</i>	14949	DRAWING NO.
305-0521	ENGR <i>Am 8/24/07</i>	SCALE 2/1	DATE 9/17/80
305-0458	APPR	DATE 9/17/80	SHEET 1C
305-0419			
NEXT ASSY			