


PART NUMBER	ITEM ① BODY	ITEM ② INSULATOR	ITEM ③ CONTACT
CP-AD210	ZINC NICKEL PLATED	DELTRIN	BRASS NICKEL PLATED


受控 CONTROLLED DOCUMENT					
编号 P/N	CP-AD210	版本 Rev	0B	日期 Rel'd Date	Mar 24,08

DRAWING NO. CP-AD210					
REVISIONS					
RELEASE FOR QUTATION					
A	03-20-06	W	Y	T	
B CHANGE OVERALL LENGTH & HEIGHT TOL. TO ±0.5 ADD NOTES 4 & 5					
	12-27-06	Z	L	T	

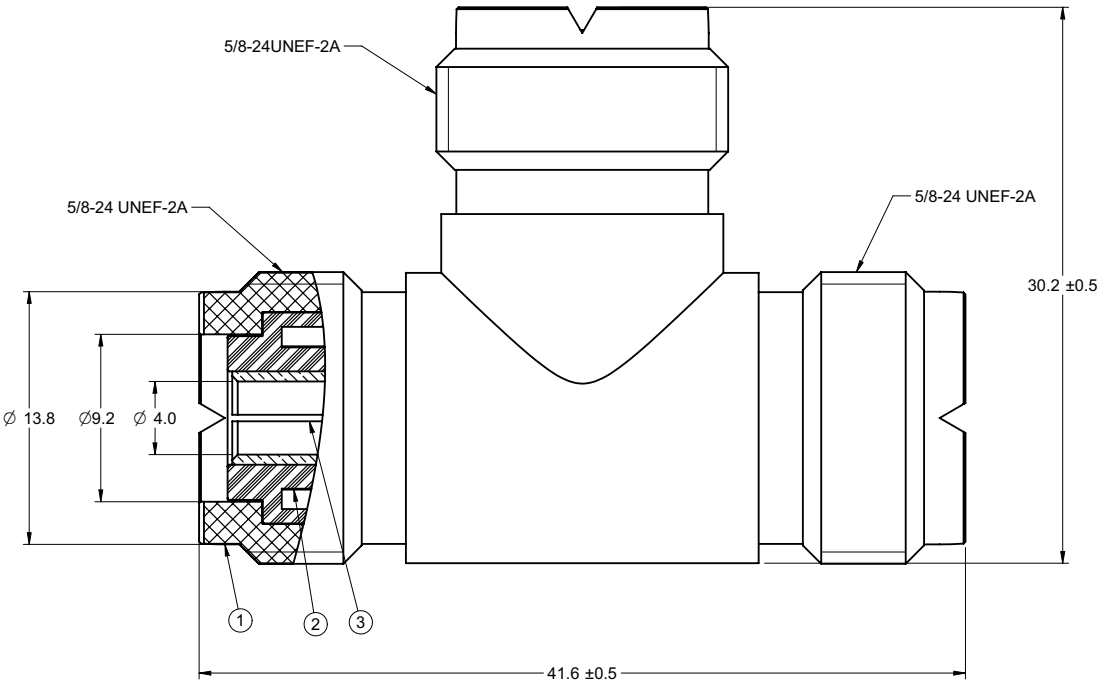

NOTES:

1. ELECTRICAL SPECIFICATIONS
IMPEDANCE: NON-CONSTANT
FREQUENCY RANGE: 0-500 MHz
WORKING VOLTAGE: 500 Vrms MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1500 vrms AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM
2. MECHANICAL SPECIFICATIONS
DURABILITY: 500 CYCLES MIN
3. ENVIRONMENTAL SPECIFICATIONS
RECOMMENDED TEMPERATURE RANGE: -55 °C TO +85 °C
MOISTURE RESISTANCE: MIL-STD-202
4. PRODUCT SHOULD BE RoHS COMPLIANCE.
5. PACKAGING REQUIREMENT FOLLOWS ENGINEERING DOCUMENT P/N 836-40200001XX

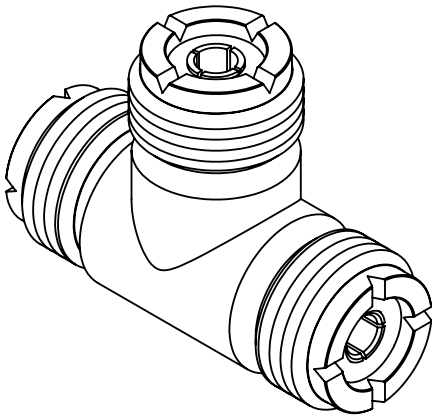


THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY GARY.ZHG	DATE 12-27-06
DECIMALS	mm	CHECKED BY LINDA.WU	DATE 12-27-06
X	± 0.5	APPROVED BY THOMAS	DATE 12-27-06
X.X	± 0.2		
X.XX	± 0.1		
ANGLES	± 0.5°	U/M	mm

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

 EMERSON. Network Power		Connectivity Solutions	
TITLE UHF 3 FEMALE T ADAPTER			
SHEET 1 OF 2	DRAWING NO. CP-AD210		SIZE C