

RED INDICATES ORIGINAL

DASH NO	FIG NO	CABLE ACCOMMODATED	A DIM	B DIM	C HEX	D DIA	E FLATS	ASSEMBLE PER
-003		RG-174, -188, -316	2.730 2.450	1.500 1.220				
-004		RG-179, RG-187	2.730 2.450	1.500 1.220				
-008		RG-195, RG-180 421-111 ESSEX	2.730 2.450	1.500 1.220	.178			
-009		8218 BELDEN YR23023 BELDEN 21-597 ESSEX	2.730 2.450	1.500 1.220				
-010		RG-122	2.730 2.450	1.500 1.220		.516	.437	
-011	1,2	RG-58, -141, -303 21-597 ESSEX	2.730 2.450	1.500 1.220	.213			
-012		RG-55, -142, -223 RG-400	2.730 2.450	1.500 1.220				
-013		RG-59, RG-62	2.730 2.450	1.500 1.220				
-013A		TCC-75-2	2.730 2.450	1.500 1.220	.255			
-014		8212 BELDEN	2.730 2.450	1.500 1.220				TAI-117
-015		RG-71 730A AT&T	2.730 2.450	1.500 1.220	.290			
-016	1	724 AT&T 8281 BELDEN	2.730 2.450	1.500 1.220	.324	.578	.500	
-017		RG-6	2.730 2.450	1.500 1.220	.340			
-018		9268 BELDEN	2.730 2.450	1.500 1.220				
-019	1,2	8279 BELDEN	2.730 2.450	1.500 1.220	.255	.516	.437	
-020	1	9248 BELDEN	2.730 2.450	1.500 1.220	.290	.578	.500	
-023		89108 BELDEN	2.730 2.450	1.500 1.220	.255	.516	.437	
-025		734A AT&T	2.730 2.450	1.500 1.220	.255			
-026	1,2	735A AT&T	2.730 2.450	1.500 1.220	.178	.516	.437	
-027		KS19224L2 AT&T	2.730 2.450	1.500 1.220	.324			

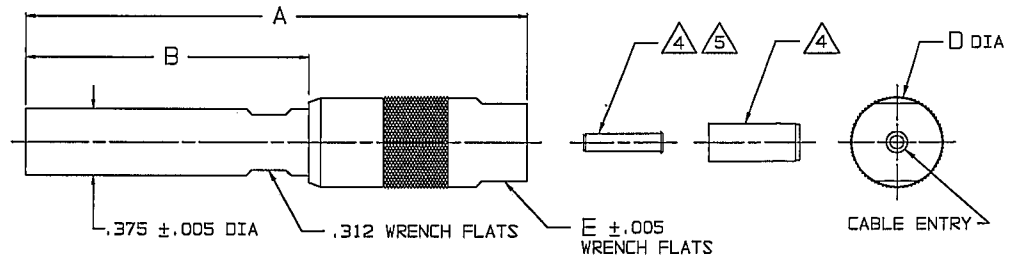


FIG 1
-003 SHOWN

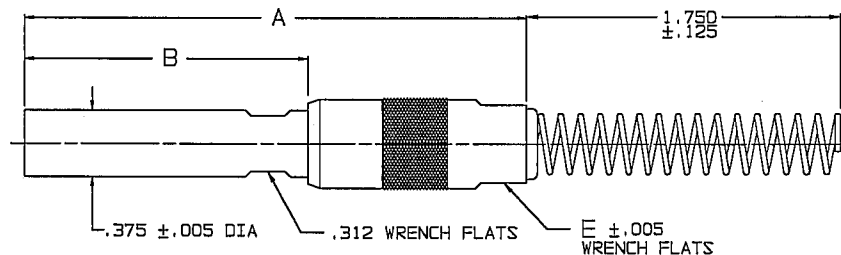


FIG 2
-003 SHOWN

INCH	MM
.005	0.13
.030	0.76
.070	1.78
.090	2.29
.125	3.18
.178	4.52
.213	5.41
.255	6.48
.290	7.37
.312	7.92
.324	8.23
.340	8.65
.375	9.53
.437	11.10
.500	12.70
.516	13.11
.578	14.68
1.220	30.99
1.500	38.10
1.750	44.45
2.450	62.23
2.730	69.34

7 IF BEND RELIEF SPRING REQUIRED (FIG 2)
ADD SUFFIX "BR" TO CABLE GROUP DASH NO
(NOT AVAILABLE FOR CABLE GROUPS -015
THRU -W017, -020, -W020, -027 & -W027)

6. DASH NO DENOTES CABLE GROUP

5 SLEEVE REQUIRED ON -003 THRU-W004 ONLY

4 SLEEVE AND CRIMP SLEEVE ARE SUPPLIED LOOSE

3. COAXIAL STD .375 SIZE TOOL CRIMP PATCH PLUG
BOTH RCA/AT&T VERSIONS (.070/.090 PIN CONTACT DIA)

2. FINISH: TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES

8. EXAMPLE OF COMPLETE MODEL NO:
PL1WC-003 BR

BASIC MODEL NO
PL1C = 50 OHM (.070)
PL1WC = 75 OHM (.090) DASH NO

RECOMMENDED
HEX CRIMP
SCALE: NONE

REV	ED	DESCRIPTION	DWN	APPROVED	DATE
V	13436	ADDED -023 TO CABLES ACCOMMODATED AND -023/ -W023 TO BDM; SEE ECO	DKC		5/24/60

11-03	QTY	DESCRIPTION	PART NUMBER	ITEM
11-02	TOL UNLESS SPECIFIED			
105-0998	.XX ±			
105-0972	.XXX ±			
1-0319	DKC	5-12-00		
1-0304	CHK			
1-0301	ENGR			
NEXT ASSY	APPR			

TROMPETER ELECTRONICS, INC.		PL1C/BR/PL1WC/BR	DRAWING NO.	REV
14949			1-0453	V
SCALE 2/1		DATE 4-30-79	SHEET 1C	