

DS1200DC

1200 Watts

Distributed Power System

Distributed Power Bulk Front-End

Total Output Power: 1200 Watts

3.3 or 5.0 Vdc Stand-by Output

Telco Input Range: -40 to -72 Vdc



Electrical Specifications

Input	
Input range:	-40 Vdc to -72 Vdc
Inrush current:	ETSI EN300 132-2 part 4.7 compliant
Efficiency:	>89% typical 48Vdc input*
Conducted EMI:	Per GR-1089-CORE Issue 4
Radiated EMI:	Per GR-1089-CORE Issue 4
Hold up time:	1 ms minimum
Output	
Main DC voltage:	+12 V @ 100 A
Stand-By:	+3.3 Vsb @ 6 A (5 V @ 4 A available)
Adjustment range:	± 5% on +12V only using I ² C
Regulation:	+12 Vdc; ± 5% 3.3 or 5.0 Vsb ± 5%
Over current:	+12Vdc: Latch protection from 107% to 150% load current Standby output: Auto-recovery mode from 110% to 150%
Over voltage:	Input: -72.5 to -75.5V +12 Vdc; 13.2 - 14.4 Vdc +3.3 Vsb; 3.76 - 4.30 Vdc
Under voltage:	+12 Vdc; 9 - 10.8 V (latch off)
Turn-on delay:	2 second max, 5 - 50 mS, monotonic rise
Main output rise time:	5 - 50 mS, monotonic rise

Special Features

- GR-1089-CORE Issue 4 compliant
- 1U X 2U form factor
- 21.71 W / in³
- +12 Vdc Output
- +3.3 Vdc stand-by (5 V standby - option)
- No minimum load required
- Hot plug operation
- N + 1 redundant
- Internal OR'ing fets
- Active current sharing shares with DS1200 AC unit (10 - 100% load)
- Built-in cooling fan (40 mm x 28 mm)
- I²C communication interface bus
- PMBus compliant
- EEPROM for FRU data
- Amber/green bi-color LED status
- Internal fan speed control
- Fan Fail Tach Output Signal
- INTEL, SSI Std. logic timing
- INTEL, SSI Std. FRU data format
- Full digital control
- Two year warranty
- NEBS compliant

Safety

- UL/cUL 60950 (UL Recognized)
- NEMKO+ CB Report EN60950
- EN60950
- CE Mark
- China CCC

Logic Control

PS_SEATED (A4):	TTL logic LOW if power supply is seated into system connector. This is a short pin. A logic HIGH if the PSU is removed
PWR GOOD (C3):	Active TTL high when output is within regulation limits.
INPUT OK (B1)	A low logic level if the input voltage is within allowable limits. A TTL logic HIGH level, and a 1mS early warning signal before 12.0 V DC output loss of regulation.
PS_INHIBIT/PS_KILL (B4):	When left open power supply operation will be inhibited. When the power supply is inserted into the system, this pin will be pull low by the system and turn the power supply on only after all other power supply pins have seated.
PS ON (A1):	The output will be enabled when this signal is pulled low, below 0.8 V outputs disabled when pin is driven high or left open.

Environmental Specifications


Operating temperature:	-10° to 55 °C
Storage temperature:	-40 °C to +85 °C
Altitude, operating:	13,000 ft
Electromagnetic susceptibility / Input transients:	GR-1089-CORE Issue 4
RoHS & lead-free	Compliant
Humidity:	20 to 90% RH, non-condensing
Shock and vibration specifications:	Complies with Astec Std. Specifications, Q3205 + additional NEBS requirement
MTBF (Demonstrated):	500K Hrs at full load, 40 °C

Ordering Information

Model Number	Nominal Output Voltage Set Point	Set Point Tolerance	Total Regulation	Minimum Current	Maximum Current	Output Ripple P/P	Over Current	Stand-by	Air Flow
DS1200DC-3	12.0 Vdc	±0.2%	±5%	0 A	100 A	120 mV	118 A - 147.6 A *	3.3 V @ 6 A	STD
DS1200DC-3-001	12.0 Vdc	±0.2%	±5%	0 A	100 A	120 mV	118 A - 147.6 A *	3.3 V @ 6 A	REV†
DS1200DC-3-002	12.0 Vdc	±0.2%	±5%	0 A	100 A	120 mV	118 A - 147.6 A *	5.0 V @ 4 A	STD
DS1200DC-3-004 **	12.0 Vdc	±0.2%	±5%	0 A	100 A	120 mV	118 A - 147.6 A *	5.0 V @ 4 A	REV†

Mechanical Drawing

Condition	LED Status
Stand-by - ON; Main output - OFF; INPUT PRESENT	Blinking green
Stand-by - ON; Main output - ON;	Solid green
Main output OCP, UVP, OVP	Blinking Amber
FAN_FAULT; OTP; Stand-by OCP/UVP	Amber

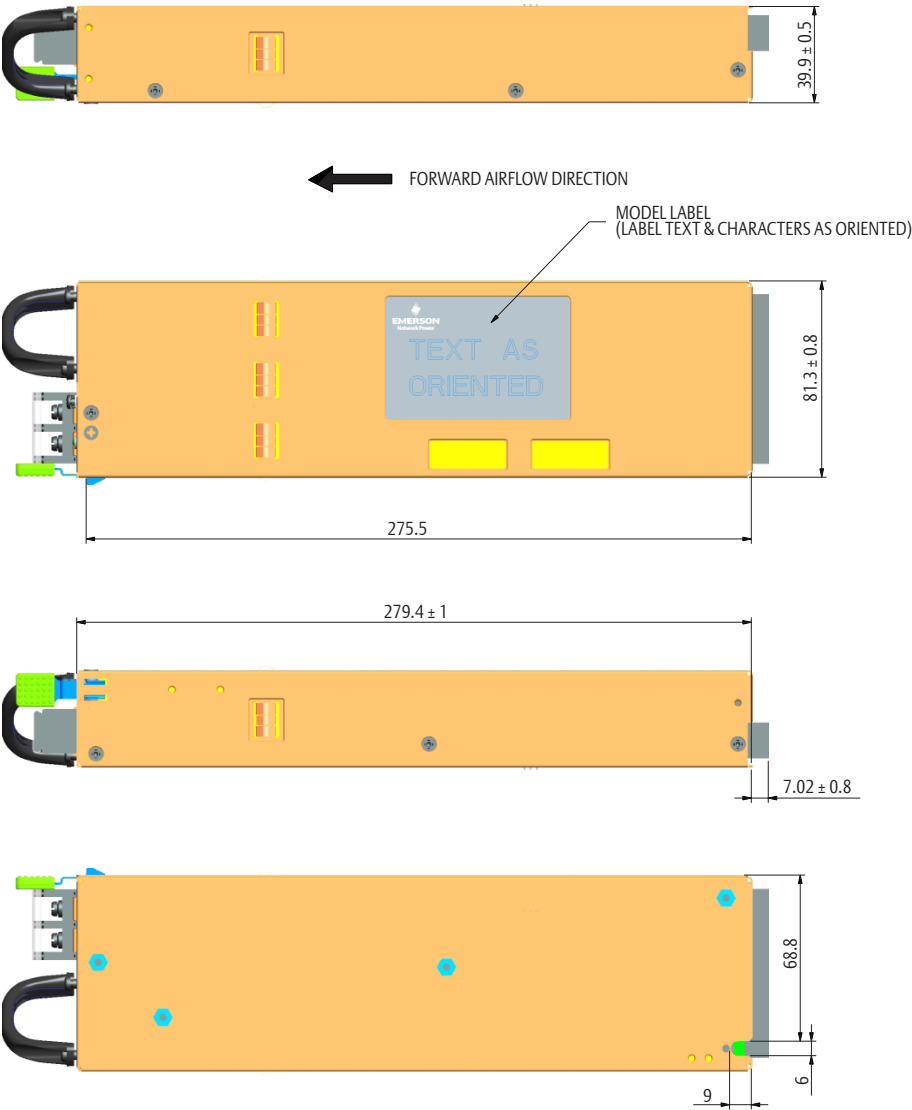

DC Output Connector Pinout Assignment

Male connector as viewed from the rear of the supply:

D1	D2	D3	D4	D5	D6						
C1	C2	C3	C4	C5	C6	PB1	PB2	PB3	PB4	PB5	PB6
B1	B2	B3	B4	B5	B6						
A1	A2	A3	A4	A5	A6						

P1 - Power Supply Side

1. FCI Power Blade 51721 series
51721-10002406AA
2. Molex Power Connector
SD-87667 series
87667-7002

Mating Connector (System Side)

1. FCI Power Blade
51741-10002406CC
Straight Pins
2. FCI Power Blade
51761-10002406AALF
Right Angle

Pin Assignments

Pin	Signal Name
PB 1	Main output return
PB 2	Main output return
PB 3	Main output return
PB 4	+ Main output
PB 5	+ Main output
PB 6	+ Main output
A1	PS_ON
A2	Main output remote sense return
A3	Spare
A4	PS_SEATED (Power Supply Seated)
A5	STAND-BY
A6	STAND-BY RETURN
B1	INPUT PRESENT
B2	Main output remote sense
B3	Main output current share
B4	PS_INHIBIT / PS_Kill
B5	STAND-BY
B6	STAND-BY RETURN
C1	SDA (I ² C Data Signal)
C2	SCL (I ² C Clock Signal)*
C3	POWER GOOD
C4	Spare
C5	STAND-BY
C6	STAND-BY RETURN
D1	A0 (I ² C Address BIT 0 Signal)
D2	A1 (I ² C Address BIT 1 Signal)
D3	S_INT (Alarm)
D4	STAND-BY RMT SENSE
D5	STAND-BY
D6	STAND-BY RETURN

*Supports I²C standard mode (100 kHz) only

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.Emerson.com/EmbeddedPower
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson, Emerson Network Power and the Emerson logo are trademarks of Emerson Electric Co. ©2012 Emerson Electric Co.