

CATALOG LISTING

DT-2R48-B6

PAGE 1 OF 1

1

ISSUE

REVISIONS

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

RELEASE NO.

PR-24109

REPLACES

X111850-DT

MICRO SWITCH


a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

DT-2R48-B6

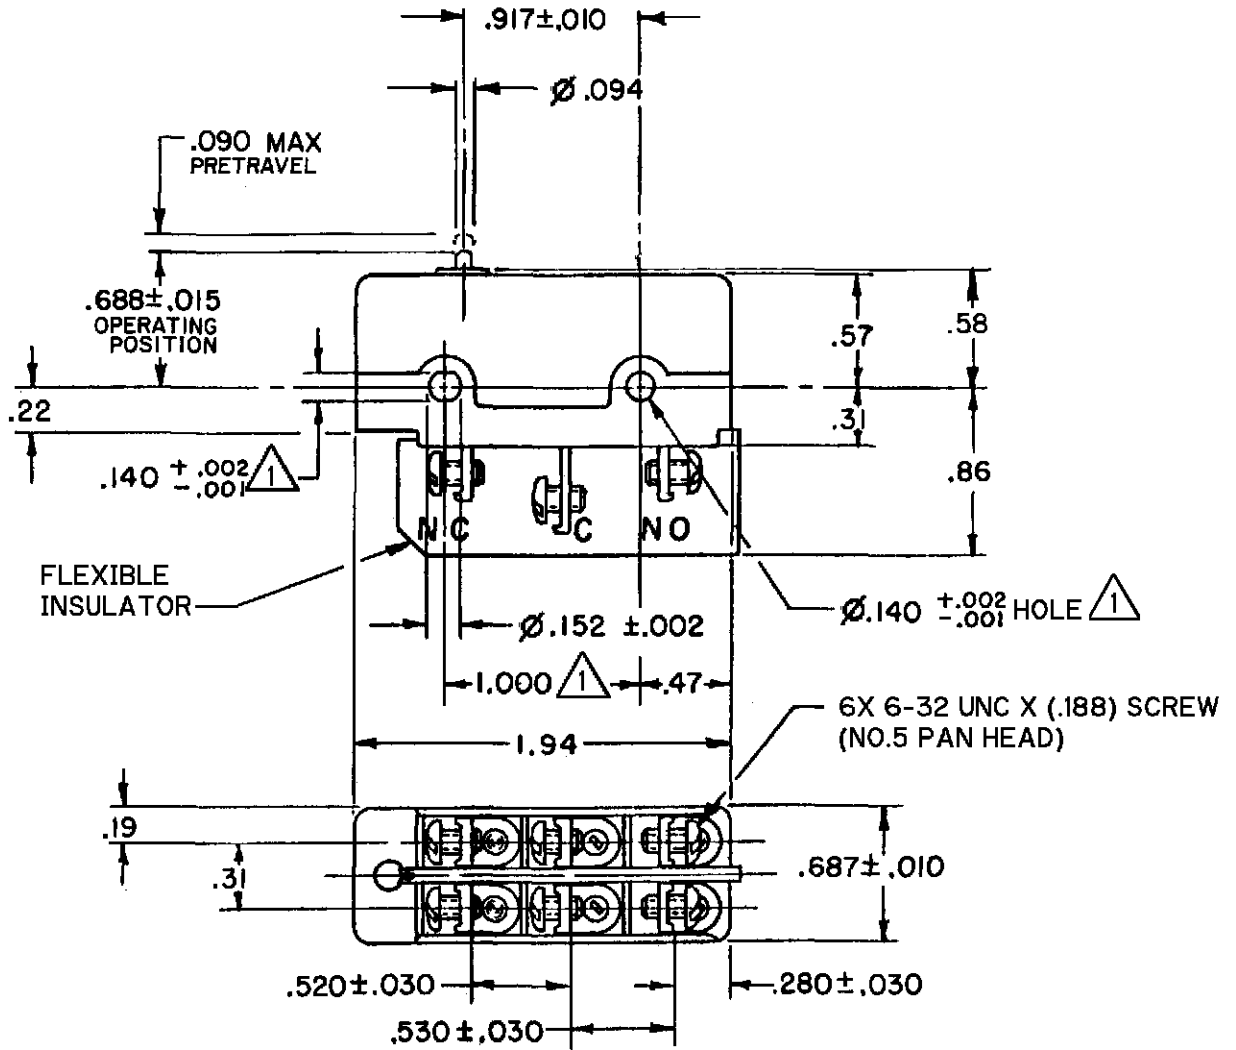


NOTES

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing .139$ MAX ON $1.000 \pm .002$ CENTERS
- OVERTRAVEL TO BE MEASURED AT CENTER LINE OF PLUNGER

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE ----- 12 - 20 OZ	CONTACT ARRANGEMENT D P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE ----- 1 OZ MIN	L59 10A 125 OR 250 VAC 0.3A 125 VDC, 0.15A 250 VDC	ONE PLACE	(.0)	$\pm .030$
DIFFERENTIAL TRAVEL ----- $\triangle 2$.010 MIN		TWO PLACE	(.00)	$\pm .015$
OVERTRAVEL ----- $\triangle 2$.010 MIN		THREE PLACE	(.000)	$\pm .005$
		ANGLES		$\pm$
		WEIGHT		