MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH—BASIC

CATALOG LISTING
DT-2RV2-A7

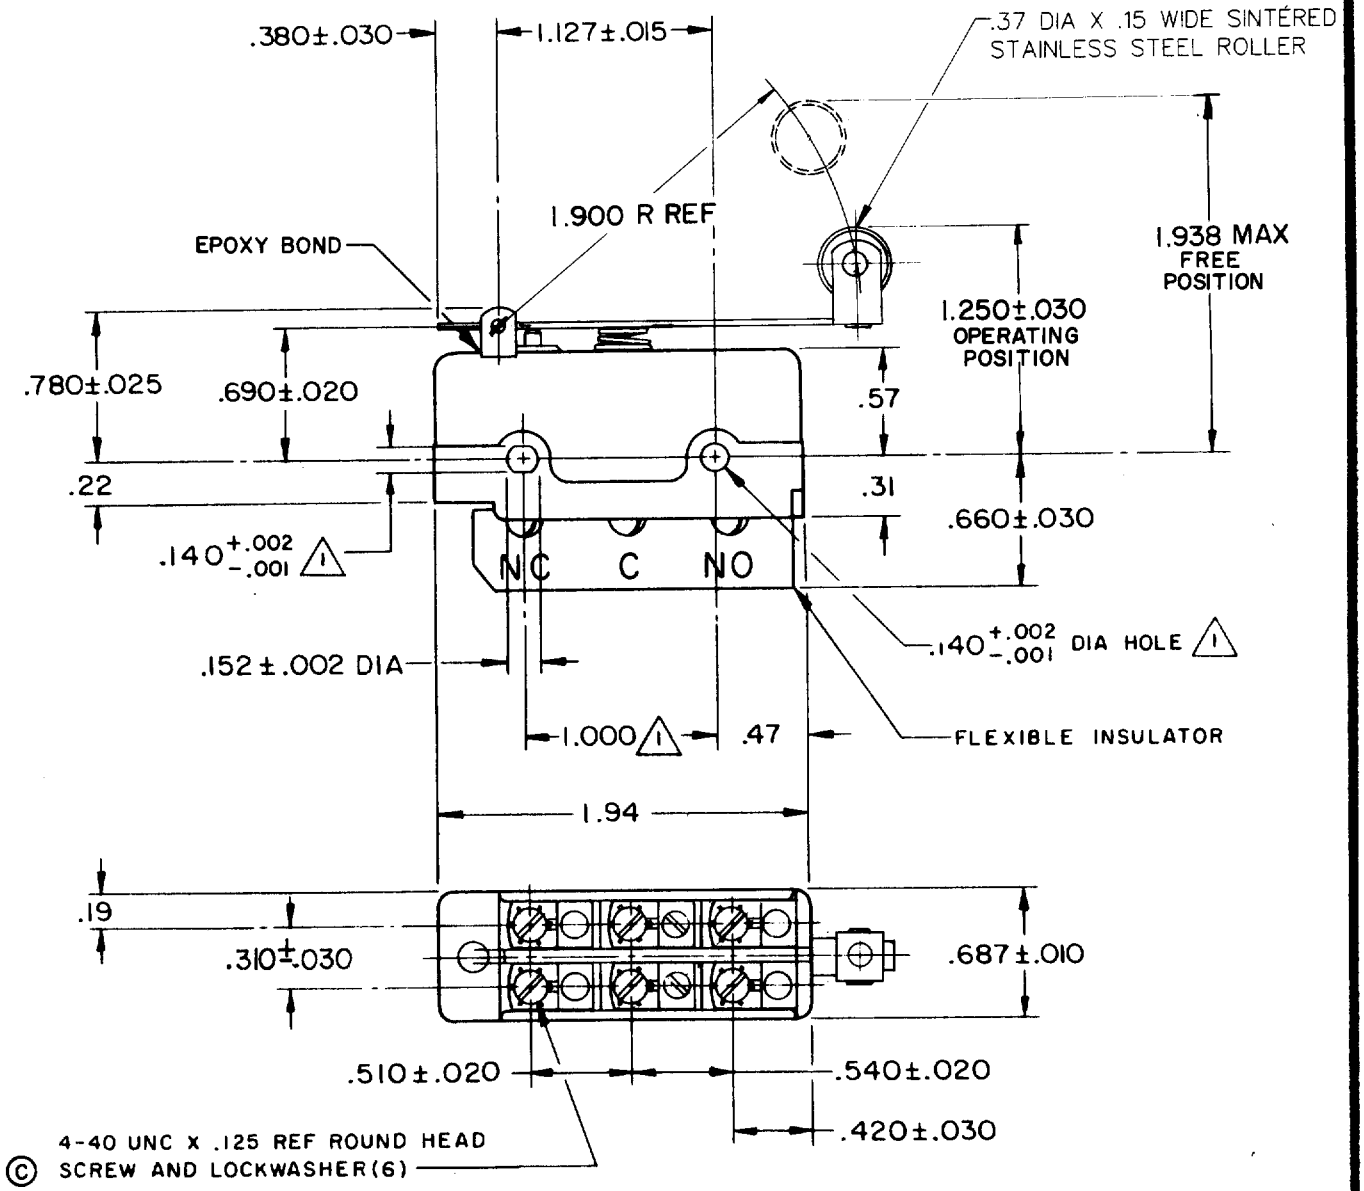

NOTE-
(1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — 4 1/2 – 7 1/2 OZ

RELEASE FORCE — 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL — .365 .565

OVERTRAVEL — .047 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

UL LISTED-FILE E12252
CODE L59
10A-125 OR 250 VAC
0.3A-125 VDC; 0.15A-250 VDC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 085 LB

DRAWN L E B 10 JUNE 63
CHECK L S D. 19 Jun 63

REPLACES
RELEASE NO.
DRAWING NUMBER DT-2RV2-A7
ISSUE X 14

REVISIONS

A	C017725	L E B 10 JUNE 63
B	C017725	L E B 28 AUG 63
C	C024941	M B S 2 DEC 68
D	C026075	M B S 26 AUG 69
E	C037528	C J H 31 AUG 76
F	C038280	K P K 30 MAR 77
G	C061634	T S K 17 JUL 87
H	CO-75204-B	S A V 1 FEB 94

FO-50378