MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
DT-2RV216-A7

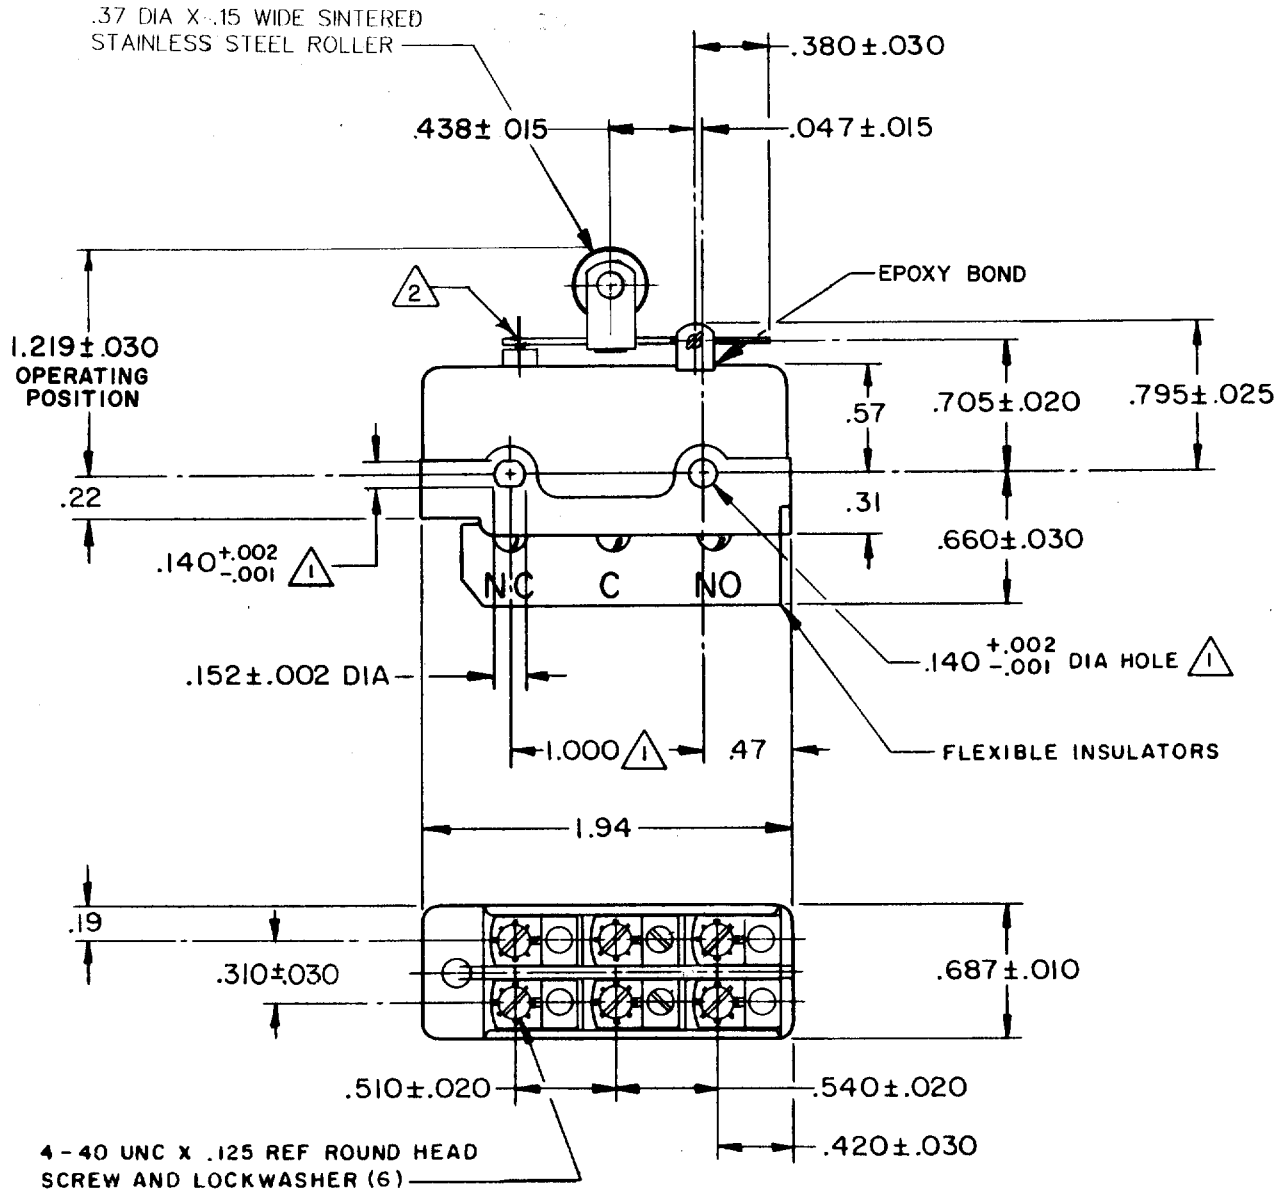

NOTE-
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2. OVERTRAVEL TO BE MEASURED AT CENTER LINE OF PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	2 1/2 LB MAX
RELEASE FORCE AT FULL OVERTRAVEL	2 OZ MIN
PRETRAVEL	.045 MAX
DIFFERENTIAL TRAVEL	.020-.030
OVERTRAVEL (2)	.005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

UL LISTED-FILE E12252
CODE L59
10A-125 OR 250 VAC
0.3A-125 VDC; 0.15A-250 VDC

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .085 LB

REPLACES: DT-2RV216-A7
RELEASE NO.: M
DRAWING NUMBER: 12
ISSUE: X

REVISIONS		
A	C017725	L E B 22 JUNE 63
B	C024941	M B S 3 DEC 66
C	C026075	M B S 26 AUG 69
D	C037528	C J H 31 AUG 76
E	C038280	K P K 31 MAR 77
F	CO 39046	G A S 19 SEPT 77
G	C045457	J A P 12 FEB 79
H	C046028	WJM 13 JUN 79
J	C061634	TSK 17 JUL 87
K	CO-75204B	TSM 1 FEB 94

CHECK: K.S.D 24 JUN 63

DRAWN: L E B 22 JUNE 63

FO-50378