

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
ROCKFORD, ILLINOIS

FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
DTE6-2RN28

M DTE6-2RN28

DRAWING
NUMBERISSUE
7

REVISIONS

A	CO	53191-D	KJS	1 MAR 84
B	CO	55989	CJH	8 NOV 84
C	CO	54958	YSK	25 FEB 85
D	CO	72661		
E	CO	77179B	KDR	21 FEB 94
F		0016895	VKR	18 NOV 05

REPLACES

SR 10932

18 NOV 05

BP

CHECK

15 APR 83

BRT

CHECK

15 APR 83

D W

CHECK


63

APR

LMH

JL

FD-80378-003

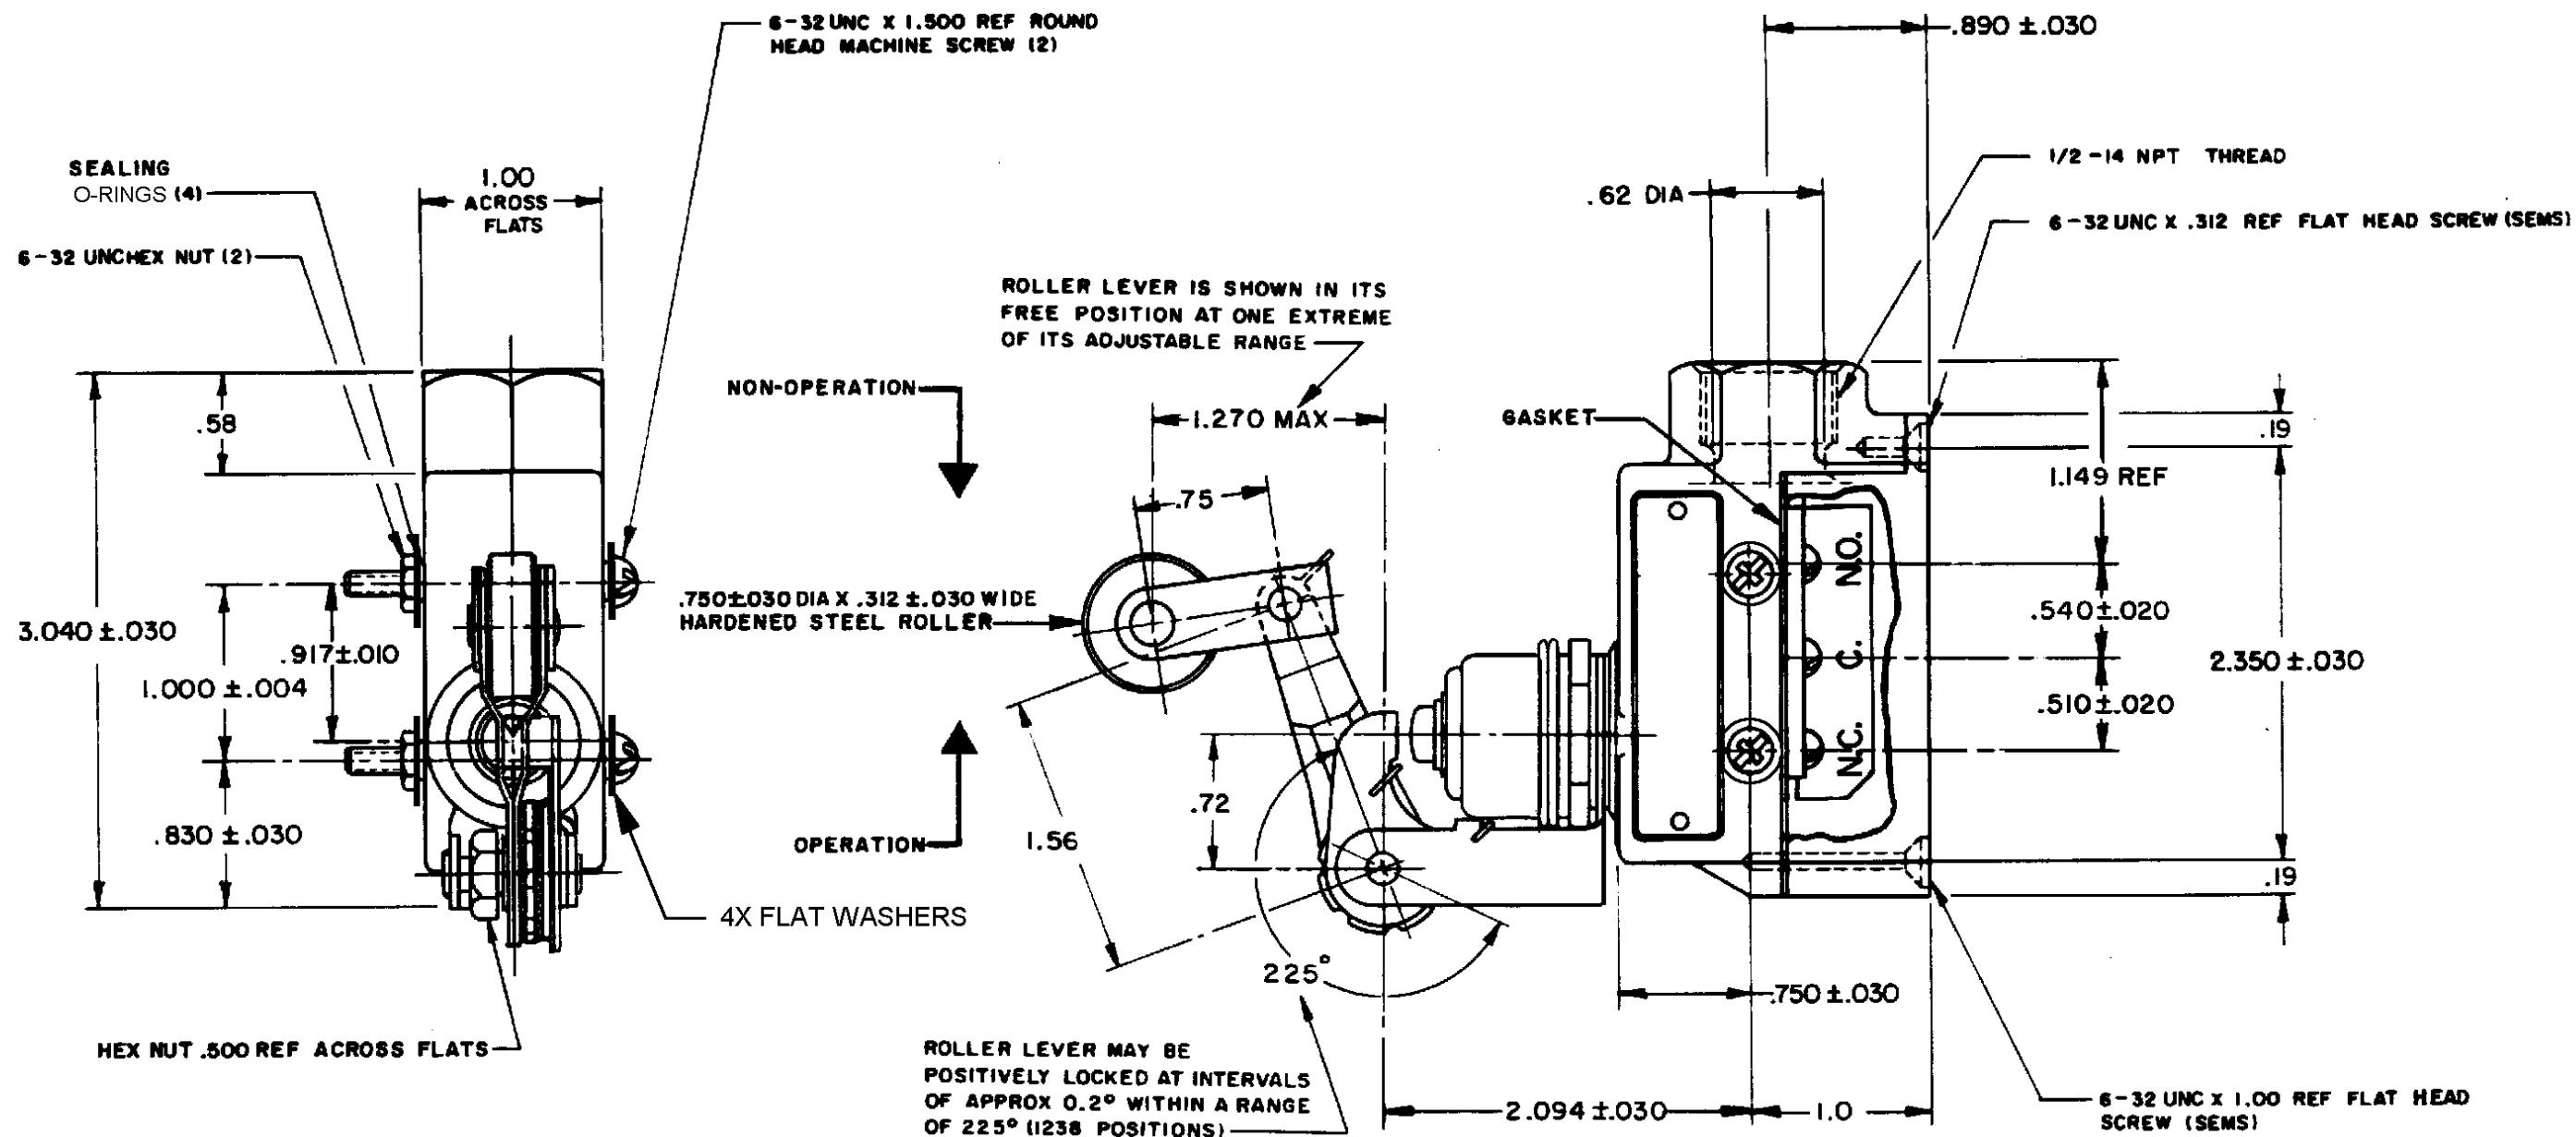

NOTE -

- 1 - 4-40UNC X .125 REF TERMINAL SCREW AND LOCKWASHER
- 2 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 3 - SEAL RATING: NEMA 1.3
IP 54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE-----20-36 OZ	CONTACT ARRANGEMENT D P D T	DO NOT SCALE PRINT
RELEASE FORCE-----6 OZ MIN		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
PRETRAVEL-----.312 MAX		TOLERANCES ARE:
DIFFERENTIAL TRAVEL-----.165 MAX		ONE PLACE (.0) ±.030
OVERTRAVEL-----.219 MIN		TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLE ±
SWITCH-BASIC REPLACEMENT---DT-2R-A7	-L59- 10 A-125 OR 250 VAC 0.3 A-125 VDC; 0.15 A-250 VDC	WEIGHT .71 LB