

XT

Metallized Polypropylene Film Capacitor


series (For High Frequency and Large Current Applications)



- Ideal for high frequency applications due to a metallized polypropylene film dielectric which exhibits superior operative characteristics with minimal loss at high frequency.
- Electrode has minimal inductance because of non-inductive construction.
- Finished by inner dipping with liquid epoxy resin and outer coating with flame-retardant epoxy resin, those double coating gives superior characteristics against moisture.
- Compliant to the RoHS directive (2011/65/EU).

Applications

- High frequency & large current circuit applications (resonant circuit, change & discharge circuit & etc.)

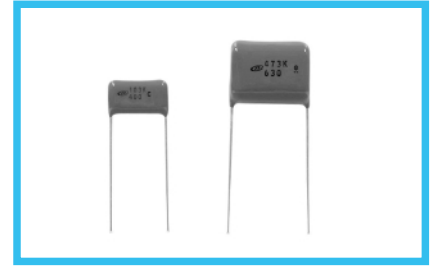


Specifications


Item	Performance Characteristics
Category Temperature Range	-40 to +105°C (Rated temperature : 85°C)
Rated Voltage (U_R)	400, 630VDC
Rated Capacitance Range	0.0068 to 0.1μF
Capacitance Tolerance	±10% (K)
Directic Loss Tangent	0.1% or less (at 1kHz)
Insulation Resistance	$C \leq 0.33\mu F$ 30000 MΩ or more $C > 0.33\mu F$ 10000 ΩF or more
Withstand Voltage	Between Terminals : Rated Voltage × 175%, 1 to 5 secs. Between Terminals : Rated Voltage × 200%, 1 to 5 secs.
Encapsulation	Flame retardant epoxy resin

Category voltage = $U_R \times 0.7$

Type numbering system (Example : 630V 0.01μF)

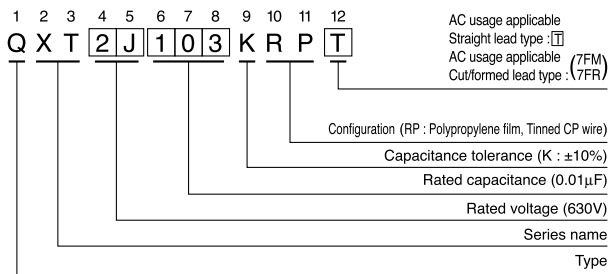

Drawing

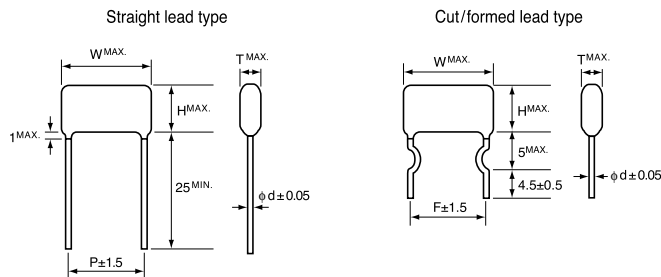

F Size	Code
15.0	7FM
20.0	7FR

Maximum allowable voltage to high frequency range

Maximum allowable voltage differs by frequency and it is requested to refer the graphs shown in next page. Effective values for 200 kHz sine wave is indicated in the list below.

Dimensions

Unit : mm





V(Code) (μF) Cap. Code Size	400VDC							Permissible Effective Value (200kHz)		630VDC							Permissible Effective Value (200kHz)	
	T	W	H	d	P	F		Ve(V)	Ie(A)	T	W	H	d	P	F		Ve(V)	Ie(A)
0.0068 682										6.0	19	13.5	0.8	15	15		66	0.57
0.01 103	5.4	19	12.9	0.8	15	15		52	0.66	6.8	19	14.3	0.8	15	15		58	0.74
0.015 153	6.1	19	13.6	0.8	15	15		45	0.85	7.9	19	15.4	0.8	15	15		51	0.87
0.022 223	7.0	19	14.5	0.8	15	15		39	1.10	9.3	19	16.8	0.8	15	15		45	1.26
0.033 333	8.2	19	15.7	0.8	15	15		35	1.46	7.7	24	17.6	0.8	20	20		41	1.71
0.047 473	9.6	19	17.1	0.8	15	15		31	1.86	10.5	24	20.3	0.8	20	20		38	2.29
0.068 683	7.8	24	17.7	0.8	20	20		27	2.38	12.5	24	22.3	0.8	20	20		34	2.94
0.1 104	9.3	24	19.1	0.8	20	20		24	3.10									

F : lead pitch for cut / formed lead wires.

Since rating other than the above can be manufactured, please ask for detail.

XT series



Maximum permissible voltage used at higher frequency range (Sine Wave)

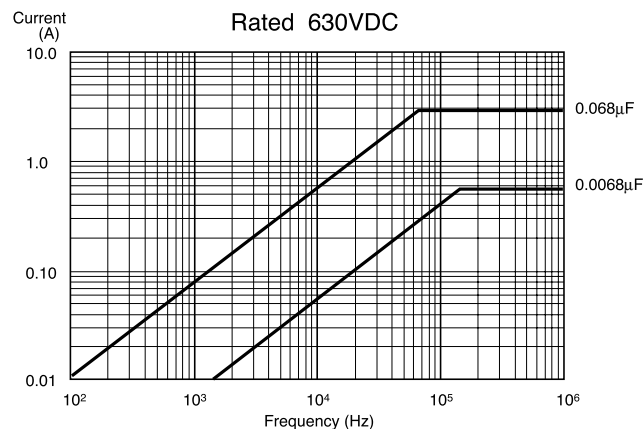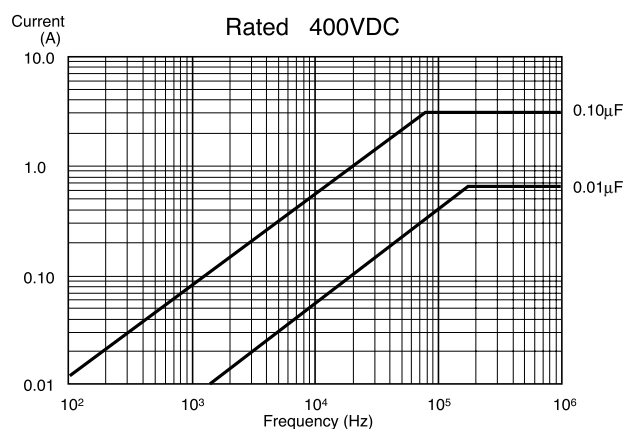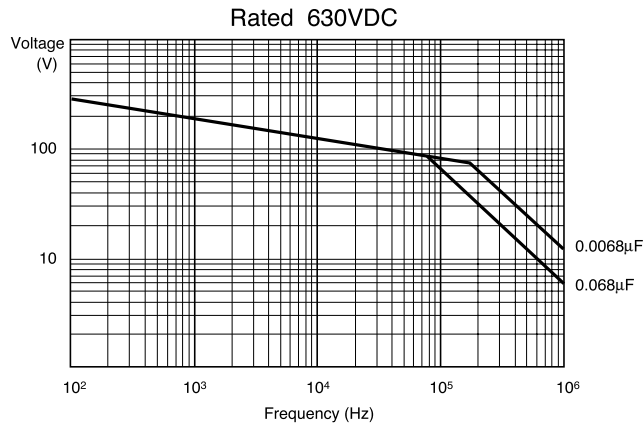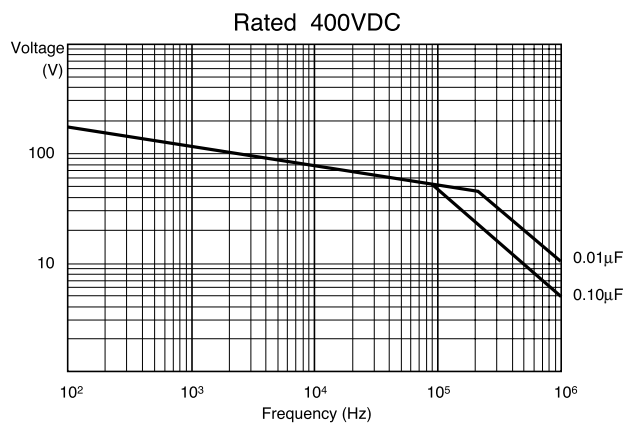

Typical Characteristic Curves Remarks : Typical curves are as shown below. (Slightly different depending on individual rating.)

Temperature Characteristics

Capacitance change

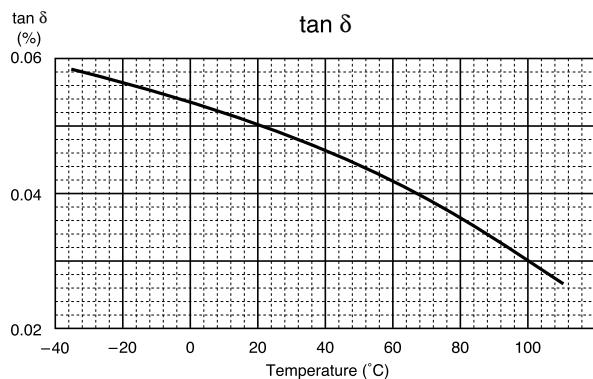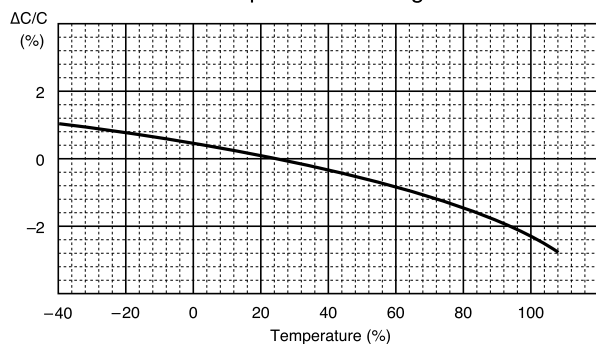

Frequency Characteristics

Capacitance change

