

MPB SERIES

◆ **FEATURES**

- Smaller version of MPS series.
- For applications where high frequency, high current are required.
(TV, display monitor, power supply, lighting Inverter, etc)
- Coated with flame-retardant (UL94 V-0) epoxy resin.
- RoHS compliance.




◆ **SPECIFICATIONS**


Category Temperature Range	-40~+105°C
Rated Voltage (U _R)	250VDC, 450VDC, 630VDC
Capacitance Tolerance	±3%(H), ±5%(J), ±10%(K)
tanδ	0.001max at 1kHz
Voltage Proof	U _R ×150% 60s
Insulation Resistance	C≤0.33μF: 25000MΩmin C>0.33μF: 7500ΩFmin
Reference Standard	JIS C 5101-16, JIS C 5101-1

◆ **OUTLINE**

(mm)

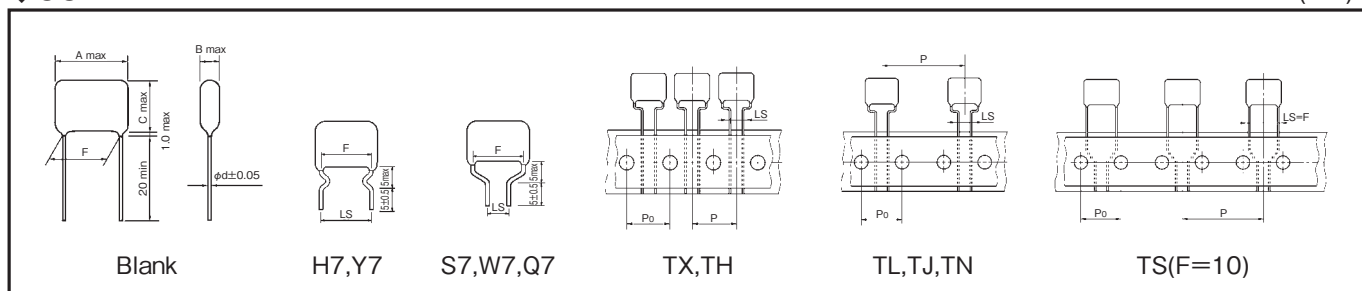

◆ **PART NUMBER**



◆ **PERMISSIBLE CURRENT FOR FREQUENCY**

