


HRS

DM2 Series miniSD™ Card Connectors

ITS-P-04017P-1



Bottom mount type

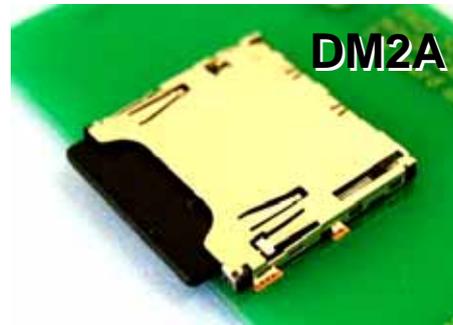

◀ With miniSD Card installed

Top mount type


◆ Features

1. Card push-in push-out ejection
2. Small size, with long ejection travel of 4 mm
3. Card capturing mechanism prevents card from flying out at ejection.
4. User-friendly mis-insertion prevention
5. Robust structure protects against excess stress from above.
6. Card is firmly locked in use for card fall-out prevention, but released when excessive pulling force is applied.
7. Reliable two-point connection with double contacts
8. Enhanced grounding for noise (EMI) reduction
9. Normally closed card detection switch contributes to saving energy.
10. Satisfies RoHS requirements.


◆ Dimensions

The world smallest mounting area with the world smallest depth.*

DM2B (Bottom mount type)

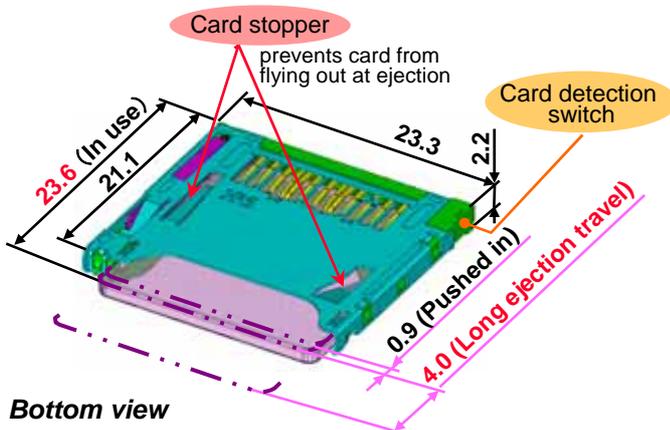

DM2A (Top mount type)

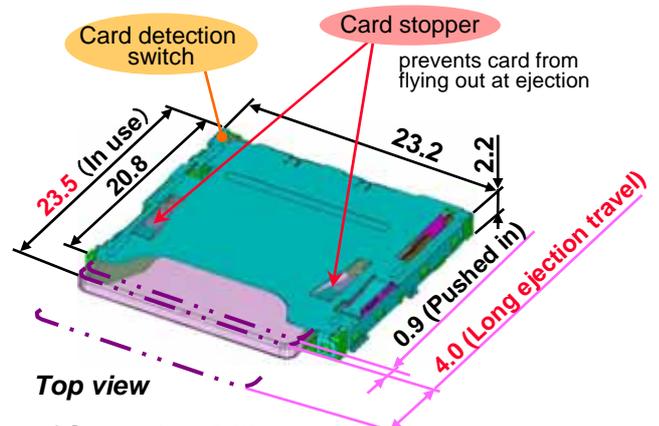

*All dimensions in millimeters. Data as of September, 2005.

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.