


IP67 FIBER OPTIC INDUSTRIAL DUPLEX LC CONNECTOR

Receptacle Assembly Kit



CHARACTERISTICS

- industrial version with bayonet coupling
- for front or rear panel mount to a max. panel thickness of 3,2 mm
- receptacle housing: polyester (black); UL 94 V-0
- panel nut: brass, nickel plated
- panel gasket: silicone (white)
- duplex LC adaptor assembly with dust caps
- operating temperature: -40°C to +85°C

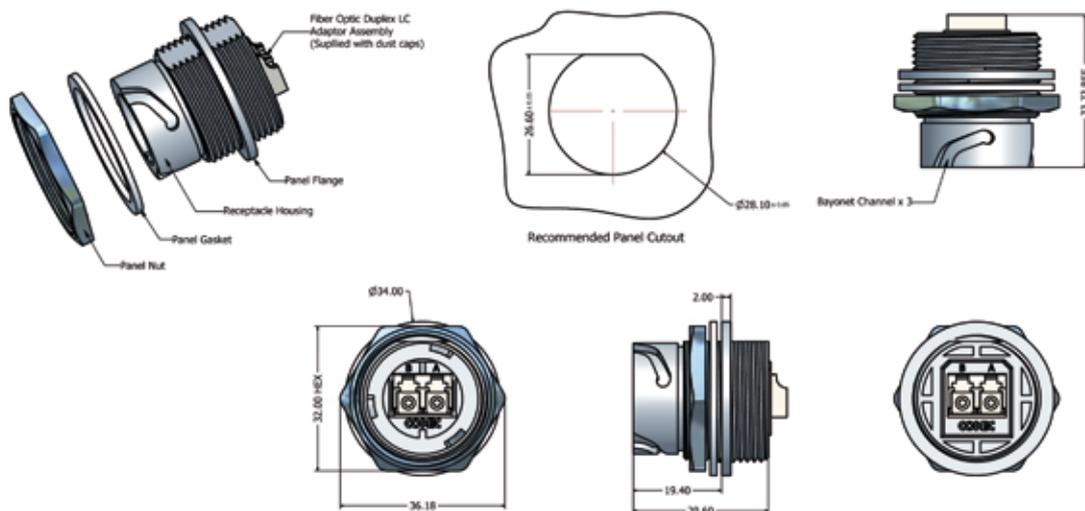

ORDER TABLE

Type	Material	SM/ MM	Part Number
Receptacle assembly kit	plastic, black	Single Mode	17-300010
Receptacle assembly kit	plastic, black	Multi Mode	17-300020