

40V Precision Single-Supply, Rail-to-Rail Output, Low-Power Operational Amplifiers

ISL28118, ISL28218

The ISL28118 and ISL28218 are single and dual, low-power precision amplifiers optimized for single-supply applications. These devices feature a common mode input voltage range extending to 0.5V below the V- rail, a rail-rail differential input voltage range for use as a comparator, and rail-to-rail output voltage swing, which makes them ideal for single-supply applications where input operation at ground is important.

These op amps feature low power, low offset voltage, and low temperature drift, making them the ideal choice for applications requiring both high DC accuracy and AC performance. These amplifiers are designed to operate over a single supply range of 3V to 40V or a split supply voltage range of +1.8V/-1.2V to ±20V. The combination of precision and small footprint provides the user with outstanding value and flexibility relative to similar competitive parts.

Applications for these amplifiers include precision instrumentation, data acquisition, precision power supply controls, and industrial controls.

Both parts are offered in 8 Ld SOIC and 8 Ld MSOP packages. All devices are offered in standard pin configurations and operate over the extended temperature range of -40°C to +125°C.

Related Literature

- [AN1595: ISL28218SOICEVAL1Z Evaluation Board User's Guide](#)

Features

- Rail-to-rail output <10mV
- Below-ground (V-) input capability to -0.5V
- Rail-to-rail input differential voltage range for comparator applications
- Single-supply range 3V to 40V
- Low current consumption 850µA
- Low noise voltage 5.6nV/√Hz
- Low noise current 355fA/√Hz
- Low input offset voltage
 - ISL28118 150µV Max.
 - ISL28218 230µV Max.
- Superb offset voltage temperature drift
 - ISL28118 1.2µV/°C, Max.
 - ISL28218 1.4µV/°C, Max.
- Operating temperature range -40°C to +125°C
- No phase reversal

Applications

- Precision instruments
- Medical instrumentation
- Data acquisition
- Power supply control
- Industrial process control

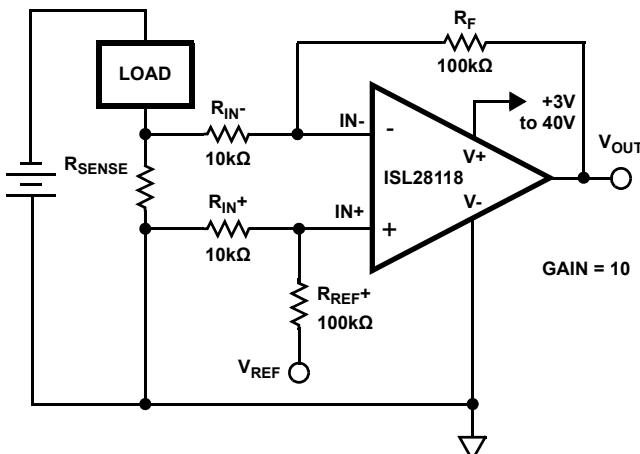


FIGURE 1. TYPICAL APPLICATION: SINGLE-SUPPLY, LOW-SIDE CURRENT SENSE AMPLIFIER

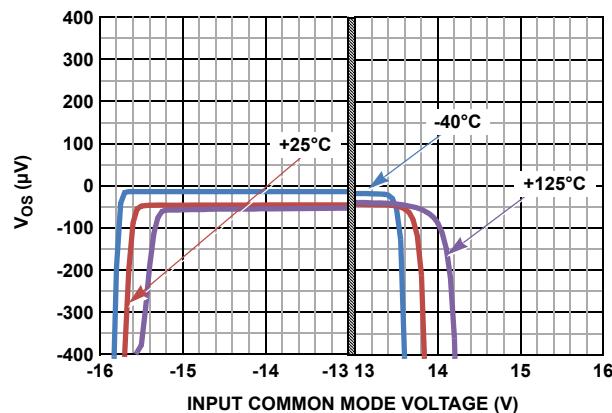


FIGURE 2. INPUT OFFSET VOLTAGE vs INPUT COMMON MODE VOLTAGE, $V_S = \pm 15V$

ISL28118, ISL28218

Pin Configurations



Pin Descriptions

ISL28118 (8 LD SOIC, MSOP)	ISL28218 (8 LD SOIC, MSOP)	PIN NAME	EQUIVALENT CIRCUIT	DESCRIPTION
3	3	+IN_A	1	Amplifier A non-inverting input
2	2	-IN_A	1	Amplifier A inverting input
6	1	VOUT_A	2	Amplifier A output
4	4	V-	3	Negative power supply
	5	+IN_B	1	Amplifier B non-inverting input
	6	-IN_B	1	Amplifier B inverting input
	7	VOUT_B	2	Amplifier B output
7	8	V+	3	Positive power supply
1, 5, 8	-	NC	-	No Connect

CIRCUIT 1

CIRCUIT 2

CIRCUIT 3

Ordering Information

PART NUMBER (Notes 1, 2, 3)	PART MARKING	TEMPERATURE RANGE (°C)	PACKAGE (Pb-Free)	PKG. DWG. #
ISL28118FBZ	28118 FBZ	-40 to +125	8 Ld SOIC	M8.15E
ISL28118FUZ	8118Z	-40 to +125	8 Ld MSOP	M8.118
ISL28218FBZ	28218 FBZ	-40 to +125	8 Ld SOIC	M8.15E
ISL28218FUZ	8218Z	-40 to +125	8 Ld MSOP	M8.118
ISL28218SOICEVAL1Z	Evaluation Board			

NOTES:

1. Add “-T*” suffix for tape and reel. Please refer to [TB347](#) for details on reel specifications.
2. These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
3. For Moisture Sensitivity Level (MSL), please see device information pages for [ISL28118](#), [ISL28218](#). For more information on MSL, please see Technical Brief [TB363](#).

Absolute Maximum Ratings

Maximum Supply Voltage	42V
Maximum Differential Input Current	20mA
Maximum Differential Input Voltage	42V or $V_- - 0.5V$ to $V_+ + 0.5V$
Min/Max Input Voltage	42V or $V_- - 0.5V$ to $V_+ + 0.5V$
Max/Min Input Current	$\pm 20mA$
Output Short-Circuit Duration (1 output at a time)	Indefinite
ESD Tolerance	
Human Body Model (Tested per JESD22-A114F).....	3kV
Machine Model (Tested per JESD22-A115-A).....	300V
Charged Device Model (Tested per CDM-22C1OID).....	2kV

Thermal Information

Thermal Resistance (Typical)	θ_{JA} (°C/W)	θ_{JC} (°C/W)
ISL28118	8 Ld SOIC Package (Notes 4, 5)	120
	8 Ld MSOP Package (Notes 4, 5)	165
ISL28218	8 Ld SOIC Package (Notes 4, 5)	120
	8 Ld MSOP Package (Notes 4, 5)	150
Storage Temperature Range.....		-65°C to +150°C
Pb-free Reflow Profile		see link below http://www.intersil.com/pbfree/Pb-FreeReflow.asp

Operating Conditions

Ambient Operating Temperature Range	-40°C to +125°C
Maximum Operating Junction Temperature	+150°C
Supply Voltage	3V (+1.8V/-1.2V) to 40V ($\pm 20V$)

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

NOTES:

4. θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief [TB379](#) for details.
5. For θ_{JC} , the "case temp" location is taken at the package top center.

Electrical Specifications

$V_S \pm 15V, V_{CM} = 0, V_O = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise noted. Boldface entries apply over the operating temperature range, -40°C to +125°C. Temperature data established by characterization.

PARAMETER	DESCRIPTION	CONDITIONS	MIN (Note 6)	TYP	MAX (Note 6)	UNIT
V_{OS}	Input Offset Voltage	ISL28118	-150	25	150	µV
			-270		270	µV
		ISL28218	-230	40	230	µV
			-290		290	µV
TCV_{OS}	Input Offset Voltage Temperature Coefficient	ISL28118	-1.2	0.2	1.2	µV/°C
		ISL28218	-1.4	0.3	1.4	µV/°C
ΔV_{OS}	Input Offset Voltage Match (ISL28218 only)	All packages	-280	44	280	µV
		SOIC	-365		365	µV
		MSOP	-390		390	µV
I_B	Input Bias Current		-575	-230		nA
			-800			nA
TCI_B	Input Bias Current Temperature Coefficient			-0.8		nA/°C
I_{OS}	Input Offset Current		-50	4	50	nA
			-75		75	nA
CMRR	Common-Mode Rejection Ratio	$V_{CM} = V_- - 0.5V$ to $V_+ - 1.8V$		118		dB
		$V_{CM} = V_-$ to $V_+ - 1.8V$ ISL28118 SOIC	102	118		dB
			98			dB
		$V_{CM} = V_-$ to $V_+ - 1.8V$ ISL28218 SOIC	103	118		dB
			99			dB
		$V_{CM} = V_-$ to $V_+ - 1.8V$ ISL28118 and ISL28218 MSOP	102	118		dB
			97			dB

ISL28118, ISL28218

Electrical Specifications $V_S = \pm 15V$, $V_{CM} = 0$, $V_0 = 0V$, $R_L = \text{Open}$, $T_A = +25^\circ\text{C}$, unless otherwise noted. **Boldface entries apply over the operating temperature range, -40°C to +125°C. Temperature data established by characterization.** (Continued)

PARAMETER	DESCRIPTION	CONDITIONS	MIN (Note 6)	TYP	MAX (Note 6)	UNIT
V_{CMIR}	Common Mode Input Voltage Range	Guaranteed by CMRR test	$V_- - 0.5$		$V_+ - 1.8$	V
			V_-		$V_+ - 1.8$	V
PSRR	Power Supply Rejection Ratio	$V_S = 3V$ to 40V, V_{CMIR} = Valid Input Voltage	109	124		dB
			105			dB
A_{VOL}	Open-Loop Gain	$V_0 = -13V$ to +13V, $R_L = 10k\Omega$ to ground, ISL28118 SOIC	125	136		dB
			120			dB
		$V_0 = -13V$ to +13V, $R_L = 10k\Omega$ to ground, ISL28218 SOIC	125	136		dB
			122			dB
		$V_0 = -13V$ to +13V, $R_L = 10k\Omega$ to ground, ISL28118 and ISL28218 MSOP	120	136		dB
			116			dB
V_{OL}	Output Voltage Low, V_{OUT} to V_- See Figure 32	ISL28118 $R_L = 10k\Omega$			70	mV
					85	mV
		ISL28218 $R_L = 10k\Omega$			70	mV
					73	mV
V_{OH}	Output Voltage High, V_+ to V_{OUT} See Figure 32	ISL28118			110	mV
		ISL28218 $R_L = 10k\Omega$			120	mV
I_S	Supply Current/Amplifier	ISL28118 $R_L = \text{Open}$		0.85	1.2	mA
					1.6	mA
		ISL28218 $R_L = \text{Open}$		0.85	1.1	mA
					1.4	mA
I_{SC+}	Output Short Circuit Source Current	$R_L = 10\Omega$ to V_-		16		mA
I_{SC-}	Output Short Circuit Sink Current	$R_L = 10\Omega$ to V_+		28		mA
V_{SUPPLY}	Supply Voltage Range	Guaranteed by PSRR	3		40	V

AC SPECIFICATIONS

GBWP	Gain Bandwidth Product	$A_{CL} = 101$, $V_{OUT} = 100mV_{P-P}$; $R_L = 2k\Omega$		4		MHz
e_{np-p}	Voltage Noise	0.1Hz to 10Hz, $V_S = \pm 18V$		300		nV _{P-P}
e_n	Voltage Noise Density	f = 10Hz, $V_S = \pm 18V$		8.5		nV/ $\sqrt{\text{Hz}}$
e_n	Voltage Noise Density	f = 100Hz, $V_S = \pm 18V$		5.8		nV/ $\sqrt{\text{Hz}}$
e_n	Voltage Noise Density	f = 1kHz, $V_S = \pm 18V$		5.6		nV/ $\sqrt{\text{Hz}}$
e_n	Voltage Noise Density	f = 10kHz, $V_S = \pm 18V$		5.6		nV/ $\sqrt{\text{Hz}}$
in	Current Noise Density	f = 1kHz, $V_S = \pm 18V$		355		fA/ $\sqrt{\text{Hz}}$
THD + N	Total Harmonic Distortion + Noise	1kHz, G = 1, $V_0 = 3.5V_{RMS}$, $R_L = 10k\Omega$		0.0003		%

TRANSIENT RESPONSE

SR	Slew Rate	$A_V = 1$, $R_L = 2k\Omega$, $V_0 = 10V_{P-P}$		± 1.2		V/ μs
t _r , t _f , Small Signal	Rise Time 10% to 90% of V_{OUT}	$A_V = 1$, $V_{OUT} = 100mV_{P-P}$, $R_f = 0\Omega$, $R_L = 2k\Omega$ to V_{CM}		100		ns
	Fall Time 90% to 10% of V_{OUT}	$A_V = 1$, $V_{OUT} = 100mV_{P-P}$, $R_f = 0\Omega$, $R_L = 2k\Omega$ to V_{CM}		100		ns
t _s	Settling Time to 0.01% 10V Step; 10% to V_{OUT}	$A_V = 1$, $V_{OUT} = 10V_{P-P}$, $R_f = 0\Omega$, $R_L = 2k\Omega$ to V_{CM}		8.5		μs

ISL28118, ISL28218

Electrical Specifications $V_S = \pm 5V$, $V_{CM} = 0$, $V_O = 0V$, $T_A = +25^\circ C$, unless otherwise noted. **Boldface entries apply over the operating temperature range, $-40^\circ C$ to $+125^\circ C$. Temperature data established by characterization.**

PARAMETER	DESCRIPTION	CONDITIONS	MIN (Note 6)	TYP	MAX (Note 6)	UNIT
V_{OS}	Input Offset Voltage	ISL28118	-150	25	150	μV
			-270		270	μV
		ISL28218	-230	40	230	μV
			-290		290	μV
TCV_{OS}	Input Offset Voltage Temperature Coefficient	ISL28118	-1.2	0.2	1.2	$\mu V/^\circ C$
		ISL28218	-1.4	0.3	1.4	$\mu V/^\circ C$
ΔV_{OS}	Input Offset Voltage Match (ISL28218 only)		-280	44	280	μV
			-365		365	μV
I_B	Input Bias Current		-575	-230		nA
			-800			nA
TCl_B	Input Bias Current Temperature Coefficient			-0.8		$nA/^\circ C$
I_{OS}	Input Offset Current		-50	4	50	nA
			-75		75	nA
CMRR	Common-Mode Rejection Ratio	$V_{CM} = V_- - 0.5V$ to $V_+ - 1.8V$		119		dB
		$V_{CM} = V_-$ to $V_+ - 1.8V$ ISL28118 and ISL28218 SOIC	101	117		dB
			97			dB
		$V_{CM} = V_-$ to $V_+ - 1.8V$ ISL28118 and ISL28218 MSOP	101	117		dB
			96			dB
V_{CMIR}	Common Mode Input Voltage Range	Guaranteed by CMRR test	$V_- - 0.5$		$V_+ - 1.8$	V
			V_-		$V_+ - 1.8$	V
PSRR	Power Supply Rejection Ratio	$V_S = 3V$ to $10V$, V_{CMIR} = Valid Input Voltage, ISL28118 SOIC ISL28218 SOIC	109	124		dB
			105			dB
		ISL28118 MSOP	108	124		dB
		ISL28218 MSOP	107	124		dB
		ISL28118 and ISL28218 MSOP	103			dB
A_{VOL}	Open-Loop Gain	$V_O = -3V$ to $+3V$, $R_L = 10k\Omega$ to ground, ISL28118 SOIC ISL28218 SOIC	122	132		dB
			117			dB
		ISL28118 and ISL28218 MSOP	120	132		dB
			115			dB
V_{OL}	Output Voltage Low, V_{OUT} to V_- , See Figure 32	$R_L = 10k\Omega$			38	mV
					45	mV
V_{OH}	Output Voltage High, V_+ to V_{OUT} See Figure 31	$R_L = 10k\Omega$			65	mV
					70	mV
I_S	Supply Current/Amplifier	$R_L = \text{Open}$		0.85	1.1	mA
					1.4	mA
I_{SC+}	Output Short Circuit Source Current	$R_L = 10\Omega$ to V_-		13		mA
I_{SC-}	Output Short Circuit Sink Current	$R_L = 10\Omega$ to V_+		20		mA

ISL28118, ISL28218

Electrical Specifications $V_S = \pm 5V$, $V_{CM} = 0$, $V_O = 0V$, $T_A = +25^\circ C$, unless otherwise noted. **Boldface entries apply over the operating temperature range, $-40^\circ C$ to $+125^\circ C$. Temperature data established by characterization.** (Continued)

PARAMETER	DESCRIPTION	CONDITIONS	MIN (Note 6)	TYP	MAX (Note 6)	UNIT
AC SPECIFICATIONS						
GBWP	Gain Bandwidth Product	$A_{CL} = 101$, $V_{OUT} = 100mV_{P-P}$; $R_L = 2k\Omega$		3.2		MHz
e_{np-p}	Voltage Noise	0.1Hz to 10Hz		320		nV _{P-P}
e_n	Voltage Noise Density	$f = 10Hz$		9		nV/ \sqrt{Hz}
e_n	Voltage Noise Density	$f = 100Hz$		5.7		nV/ \sqrt{Hz}
e_n	Voltage Noise Density	$f = 1kHz$		5.5		nV/ \sqrt{Hz}
e_n	Voltage Noise Density	$f = 10kHz$		5.5		nV/ \sqrt{Hz}
i_n	Current Noise Density	$f = 1kHz$		380		fA/ \sqrt{Hz}
THD + N	Total Harmonic Distortion + Noise	$1kHz$, $G = 1$, $V_O = 1.25V_{RMS}$, $R_L = 10k\Omega$		0.0003		%
TRANSIENT RESPONSE						
SR	Slew Rate	$A_V = 1$, $R_L = 2k\Omega$, $V_O = 4V_{P-P}$		± 1		V/ μ s
t _r , t _f , Small Signal	Rise Time 10% to 90% of V _{out}	$A_V = 1$, $V_{OUT} = 100mV_{P-P}$, $R_f = 0\Omega$, $R_L = 2k\Omega$ to V_{CM}		100		ns
	Fall Time 90% to 10% of V _{out}	$A_V = 1$, $V_{OUT} = 100mV_{P-P}$, $R_f = 0\Omega$, $R_L = 2k\Omega$ to V_{CM}		100		ns
t _s	Settling Time to 0.01% 4V Step; 10% to V _{out}	$A_V = 1$, $V_{OUT} = 4V_{P-P}$, $R_f = 0\Omega$, $R_L = 2k\Omega$ to V_{CM}		4		μ s

NOTE:

6. Compliance to datasheet limits is assured by one or more methods: production test, characterization and/or design.

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise specified.

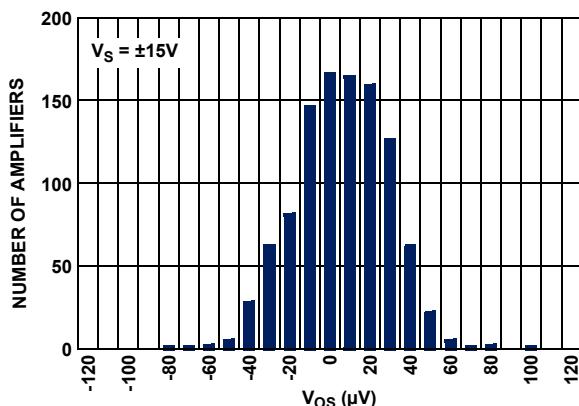


FIGURE 3. ISL28118 INPUT OFFSET VOLTAGE DISTRIBUTION

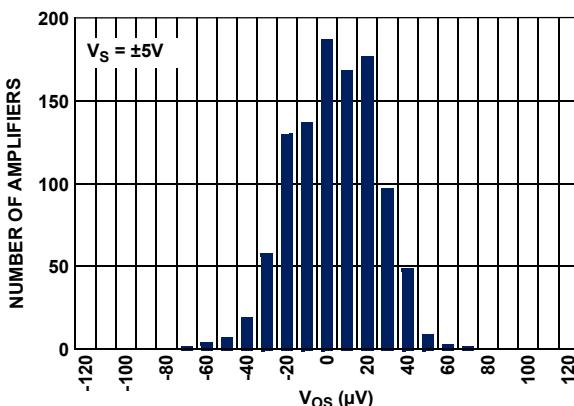


FIGURE 4. ISL28118 INPUT OFFSET VOLTAGE DISTRIBUTION

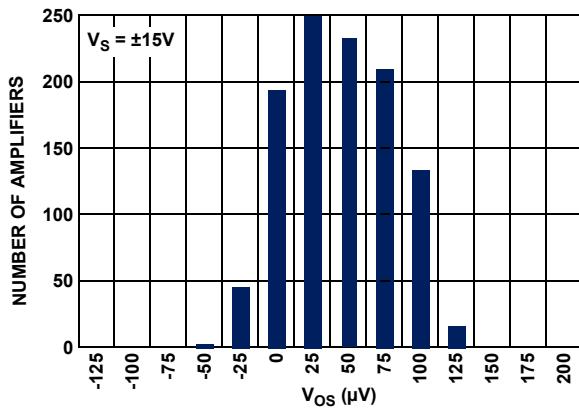


FIGURE 5. ISL28218 INPUT OFFSET VOLTAGE DISTRIBUTION

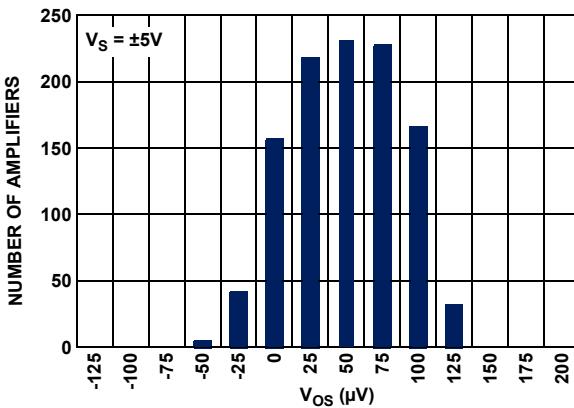


FIGURE 6. ISL28218 INPUT OFFSET VOLTAGE DISTRIBUTION

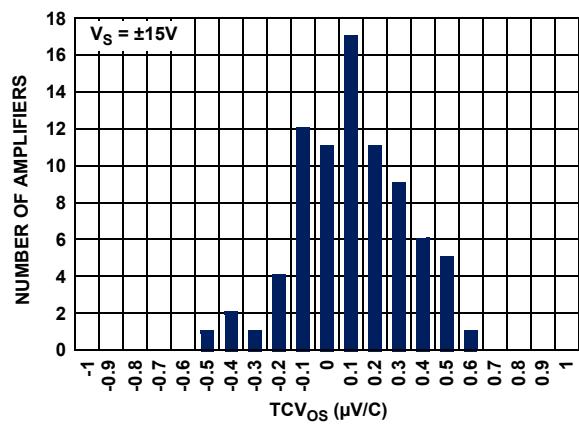


FIGURE 7. ISL28118 TCV_{OS} vs NUMBER OF AMPLIFIERS $\pm 15V$

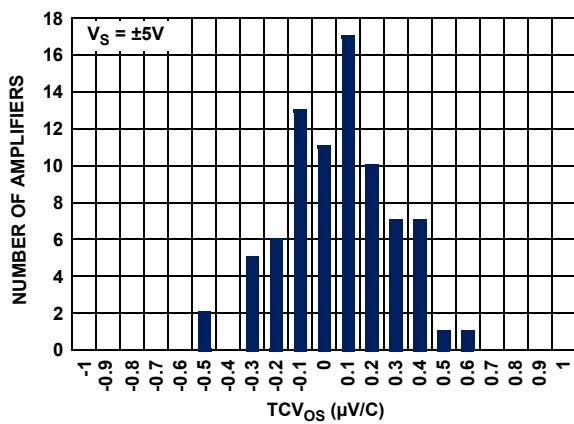


FIGURE 8. ISL28118 TCV_{OS} vs NUMBER OF AMPLIFIERS $\pm 5V$

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise specified. (Continued)

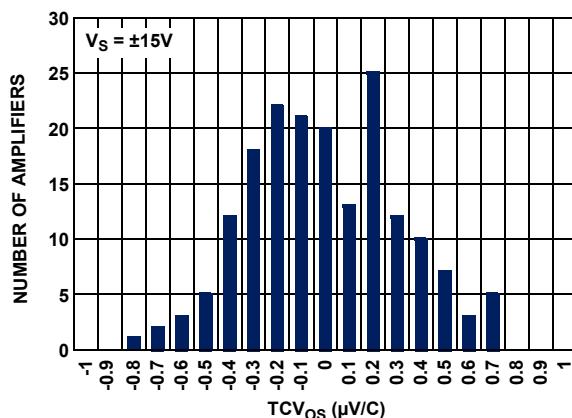


FIGURE 9. ISL28218 TCV_{OS} vs NUMBER OF AMPLIFIERS $\pm 15V$

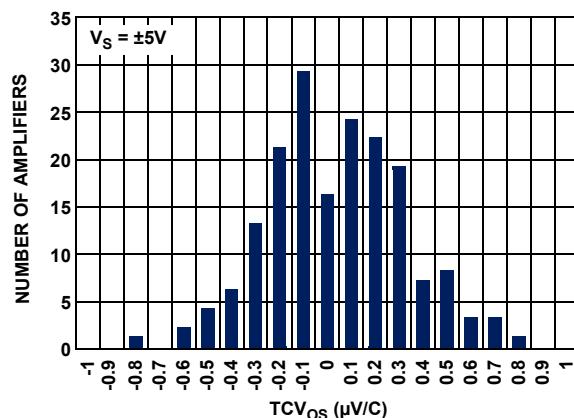


FIGURE 10. ISL28218 TCV_{OS} vs NUMBER OF AMPLIFIERS $\pm 5V$

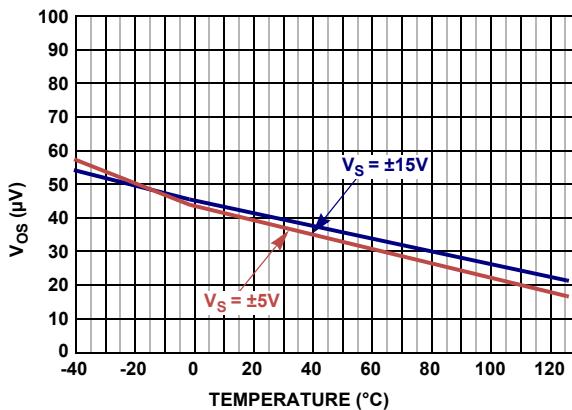


FIGURE 11. V_{OS} vs TEMPERATURE

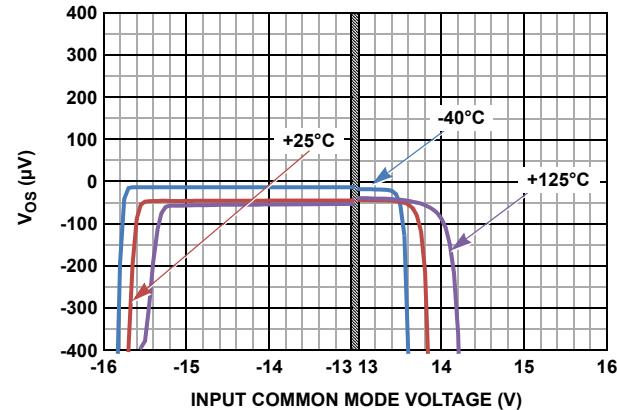


FIGURE 12. INPUT OFFSET VOLTAGE vs INPUT COMMON MODE VOLTAGE, $V_S = \pm 15V$

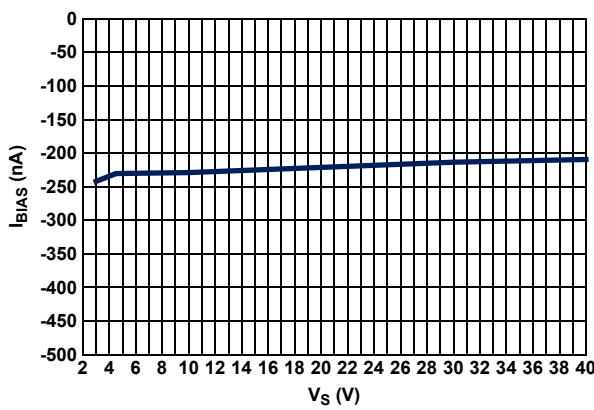


FIGURE 13. I_{BIA} vs V_S

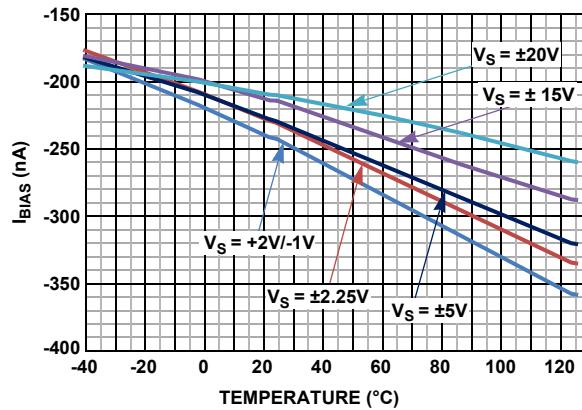


FIGURE 14. I_{BIA} vs TEMPERATURE vs SUPPLY

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ\text{C}$, unless otherwise specified. (Continued)

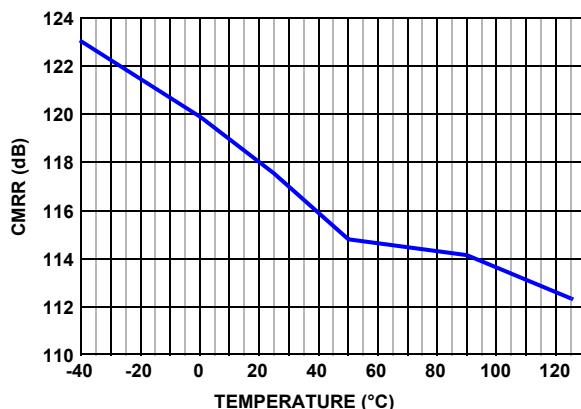


FIGURE 15. ISL28118 CMRR vs TEMPERATURE, $V_S = \pm 15V$

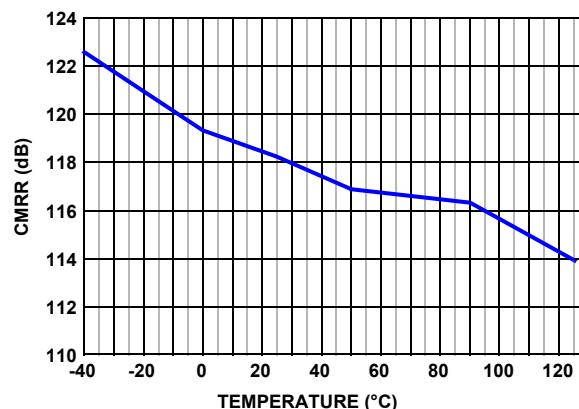


FIGURE 16. ISL28118 CMRR vs TEMPERATURE, $V_S = \pm 5V$

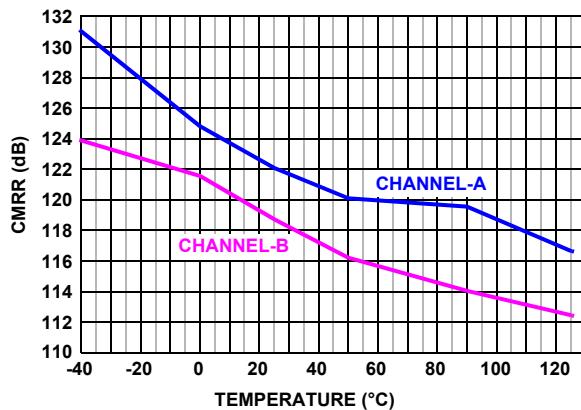


FIGURE 17. ISL28218 CMRR vs TEMPERATURE, $V_S = \pm 15V$

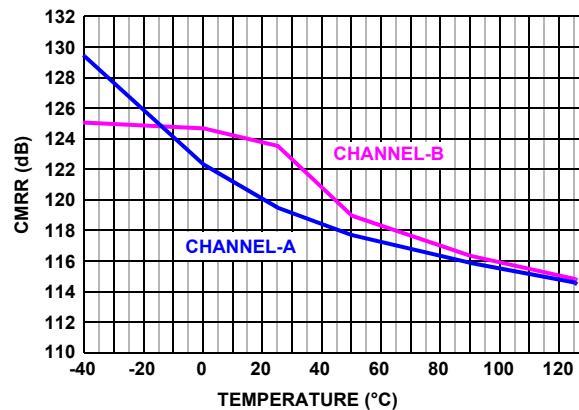


FIGURE 18. ISL28218 CMRR vs TEMPERATURE, $V_S = \pm 5V$

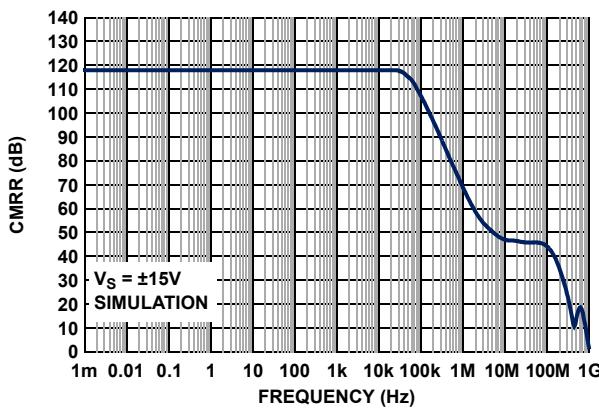


FIGURE 19. CMRR vs FREQUENCY, $V_S = \pm 15V$

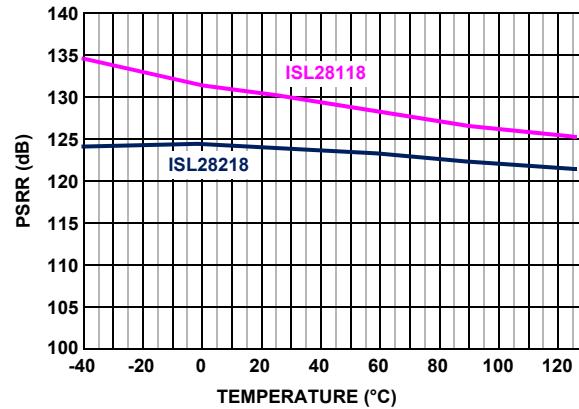


FIGURE 20. PSRR vs TEMPERATURE, $V_S = \pm 15V$

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise specified. (Continued)

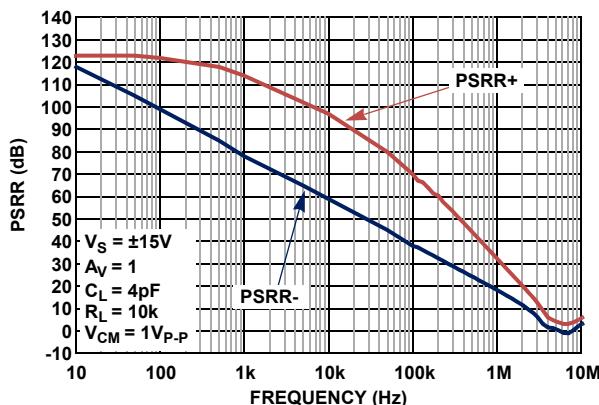


FIGURE 21. PSRR vs FREQUENCY, $V_S = \pm 15V$

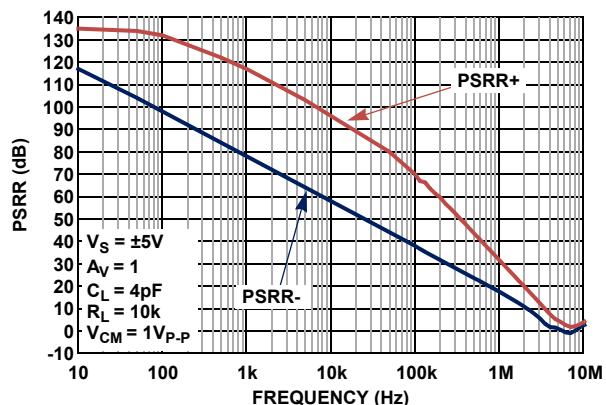


FIGURE 22. PSRR vs FREQUENCY, $V_S = \pm 5V$

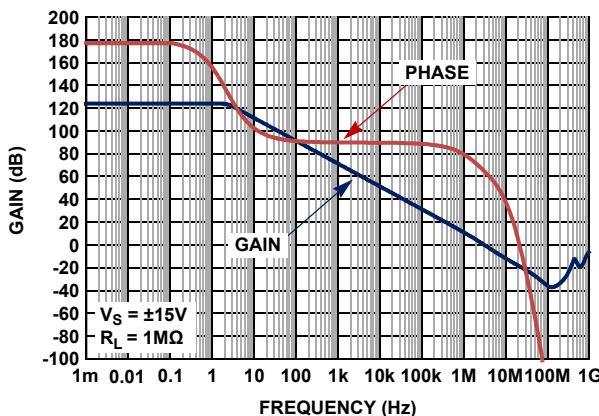


FIGURE 23. OPEN-LOOP GAIN, PHASE vs FREQUENCY, $V_S = \pm 15V$

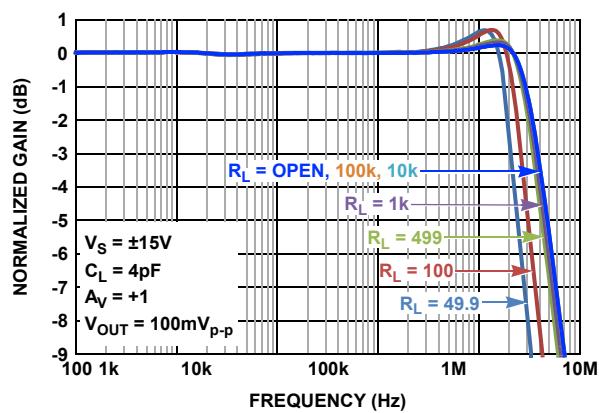
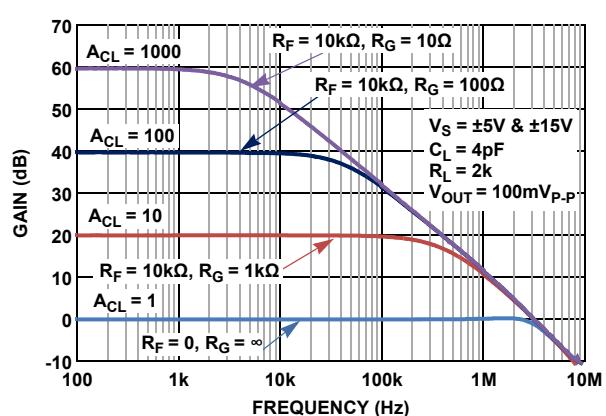


FIGURE 25. GAIN vs FREQUENCY vs R_L , $V_S = \pm 15V$

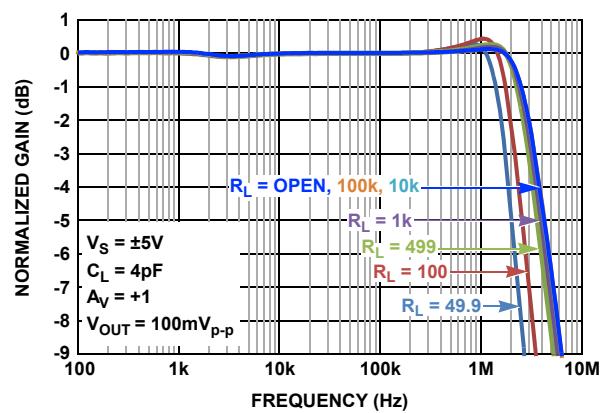


FIGURE 26. GAIN vs FREQUENCY vs R_L , $V_S = \pm 5V$

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise specified. (Continued)

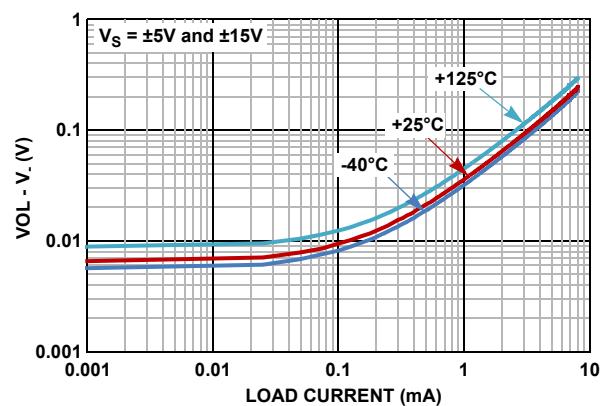
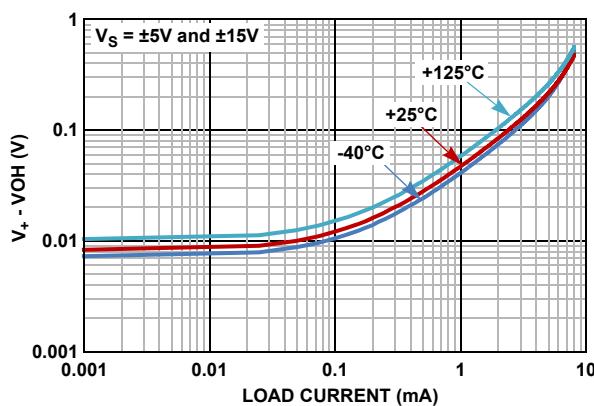
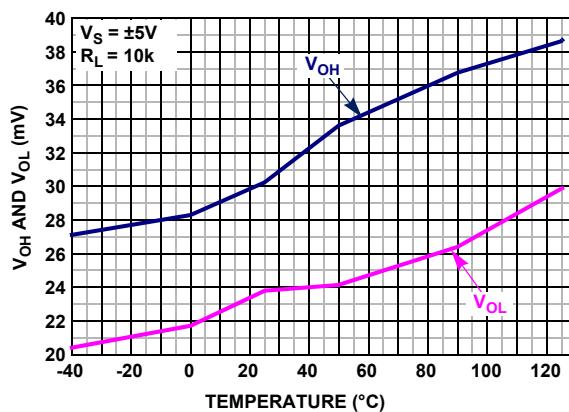
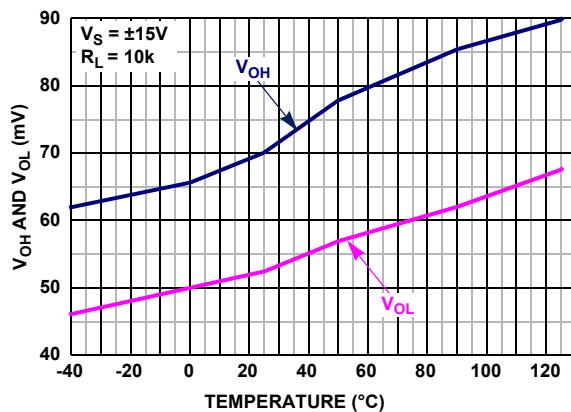
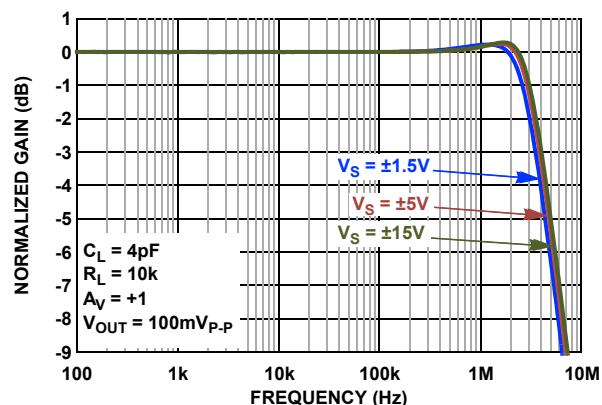
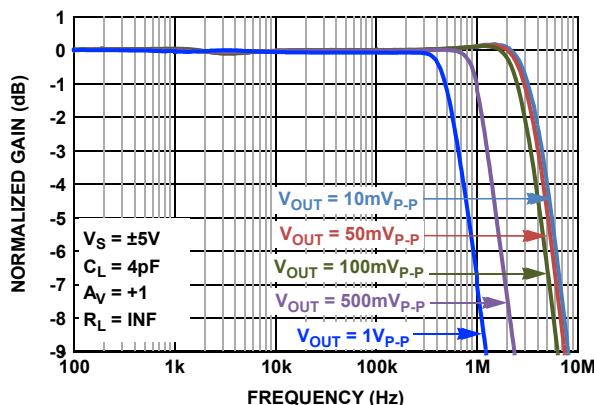


FIGURE 31. OUTPUT OVERHEAD VOLTAGE HIGH vs LOAD CURRENT, $V_S = \pm 5V \text{ AND } \pm 15V$

FIGURE 32. OUTPUT OVERHEAD VOLTAGE LOW vs LOAD CURRENT, $V_S = \pm 5V \text{ AND } \pm 15V$

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise specified. (Continued)

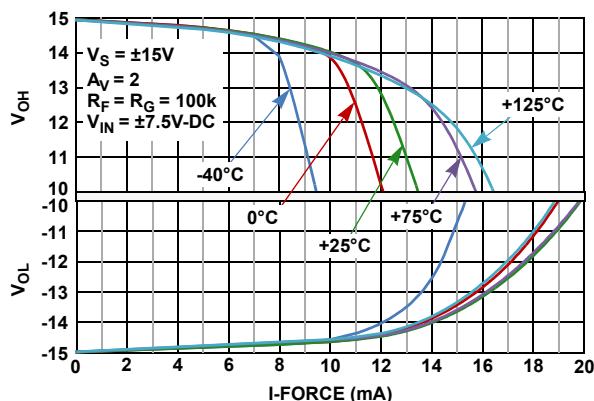


FIGURE 33. OUTPUT VOLTAGE SWING vs LOAD CURRENT $V_S = \pm 15V$

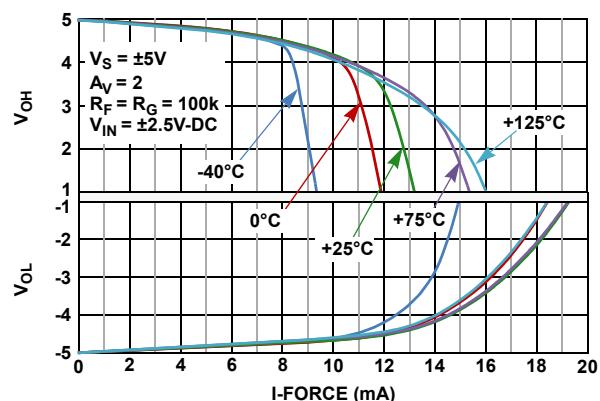


FIGURE 34. OUTPUT VOLTAGE SWING vs LOAD CURRENT $V_S = \pm 5V$

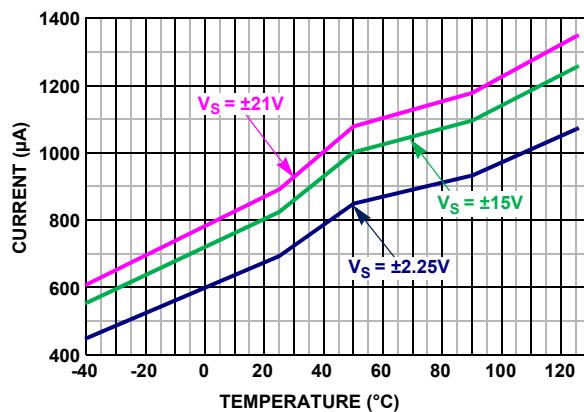


FIGURE 35. ISL28118 SUPPLY CURRENT vs TEMPERATURE vs SUPPLY VOLTAGE

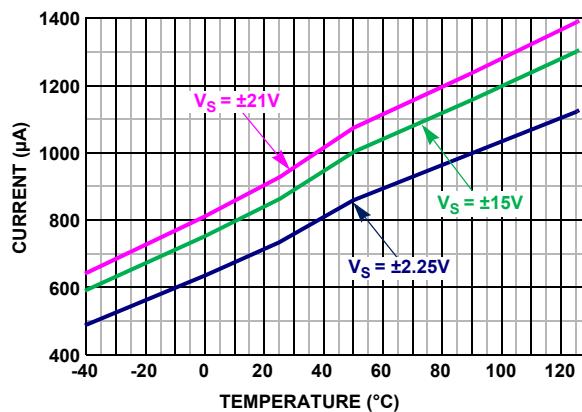


FIGURE 36. ISL28218 SUPPLY CURRENT vs TEMPERATURE vs SUPPLY VOLTAGE

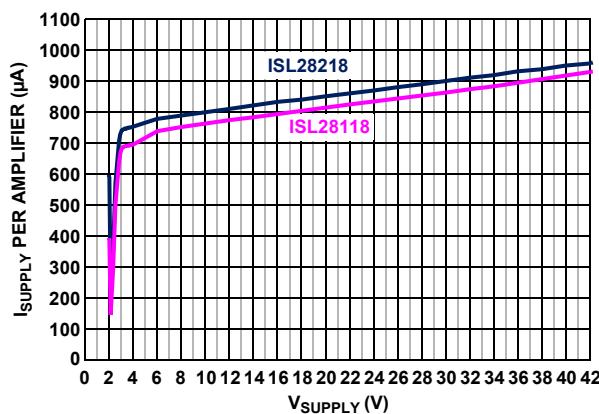


FIGURE 37. SUPPLY CURRENT vs SUPPLY VOLTAGE

Typical Performance Curves

$V_S = \pm 15V$, $V_{CM} = 0V$, $R_L = \text{Open}$, $T_A = +25^\circ C$, unless otherwise specified. (Continued)

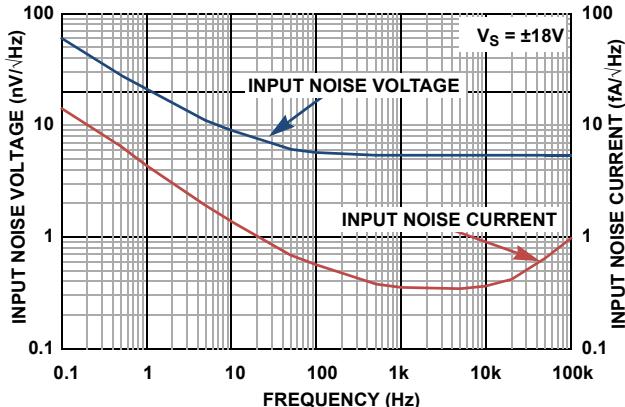


FIGURE 38. INPUT NOISE VOLTAGE (en) AND CURRENT (in) vs FREQUENCY (Hz), $V_S = \pm 18V$

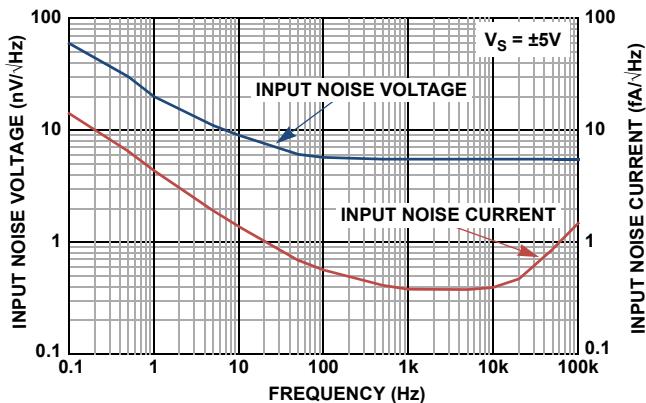


FIGURE 39. INPUT NOISE VOLTAGE (en) AND CURRENT (in) vs FREQUENCY (Hz), $V_S = \pm 5V$

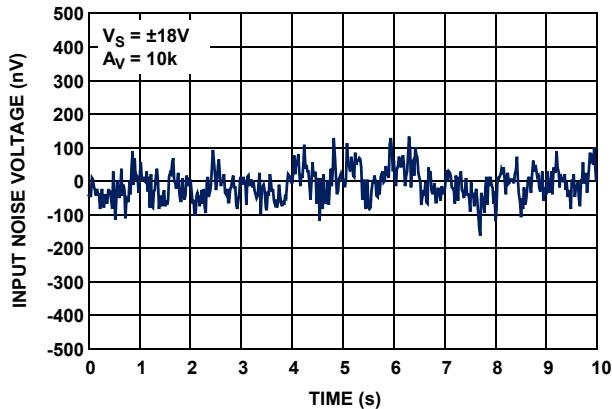


FIGURE 40. INPUT NOISE VOLTAGE 0.1Hz TO 10Hz, $V_S = \pm 18V$

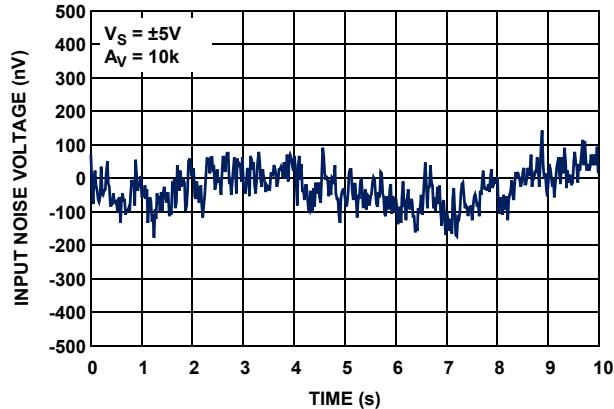


FIGURE 41. INPUT NOISE VOLTAGE 0.1Hz TO 10Hz, $V_S = \pm 5V$

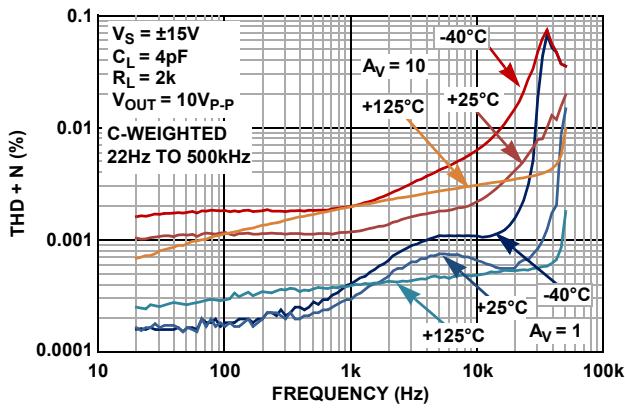


FIGURE 42. THD+N vs FREQUENCY vs TEMPERATURE, $A_V = 1, 10$, $R_L = 2k$

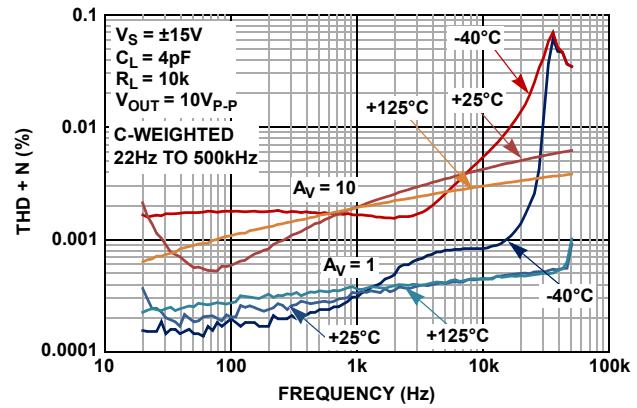


FIGURE 43. THD+N vs FREQUENCY vs TEMPERATURE, $A_V = 1, 10$, $R_L = 10k$

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise specified. (Continued)

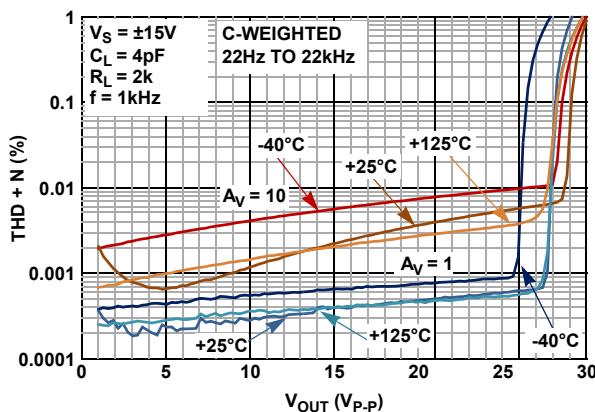


FIGURE 44. THD+N vs OUTPUT VOLTAGE (V_{OUT}) vs TEMPERATURE,
 $A_V = 1, 10, R_L = 2k$

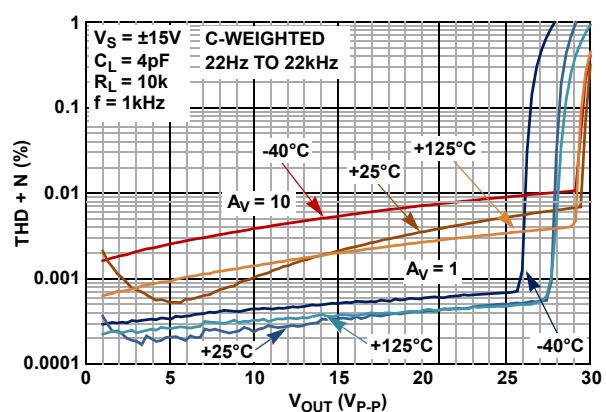


FIGURE 45. THD+N vs OUTPUT VOLTAGE (V_{OUT}) vs TEMPERATURE,
 $A_V = 1, 10, R_L = 10k$

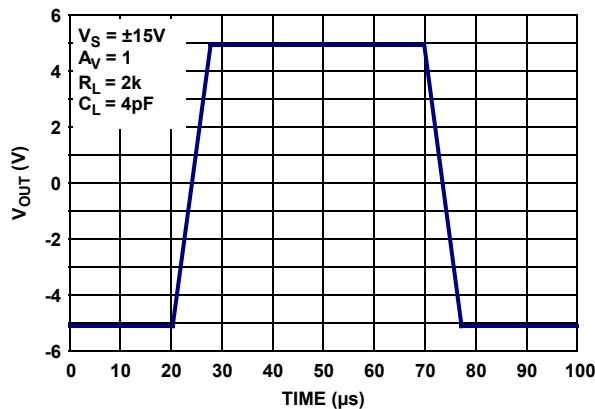


FIGURE 46. LARGE SIGNAL 10V STEP RESPONSE, $V_S = \pm 15V$

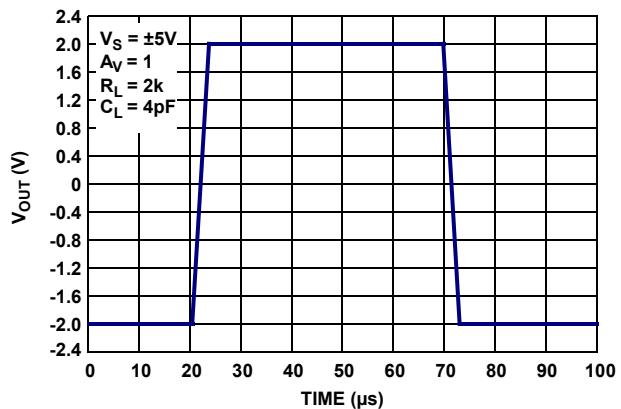


FIGURE 47. LARGE SIGNAL 4V STEP RESPONSE, $V_S = \pm 5V$

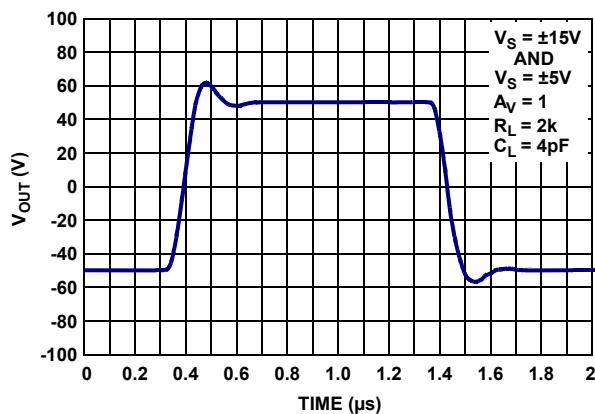


FIGURE 48. SMALL SIGNAL TRANSIENT RESPONSE,
 $V_S = \pm 5V, \pm 15V$

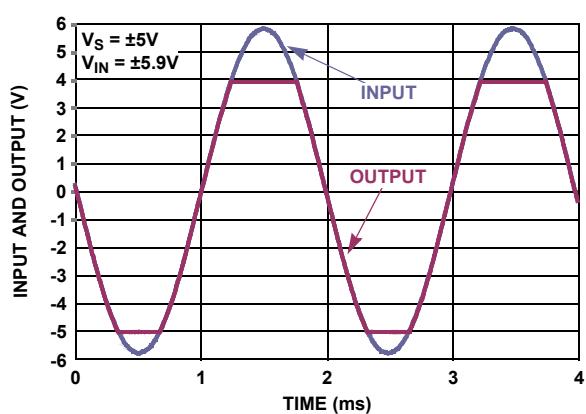


FIGURE 49. NO PHASE REVERSAL

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise specified. (Continued)

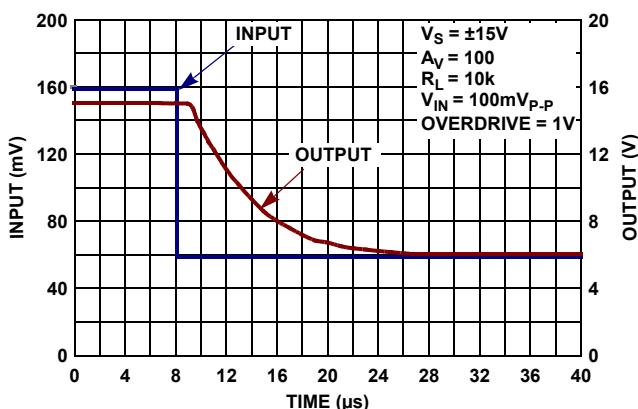


FIGURE 50. POSITIVE OUTPUT OVERLOAD RESPONSE TIME,
 $V_S = \pm 15V$

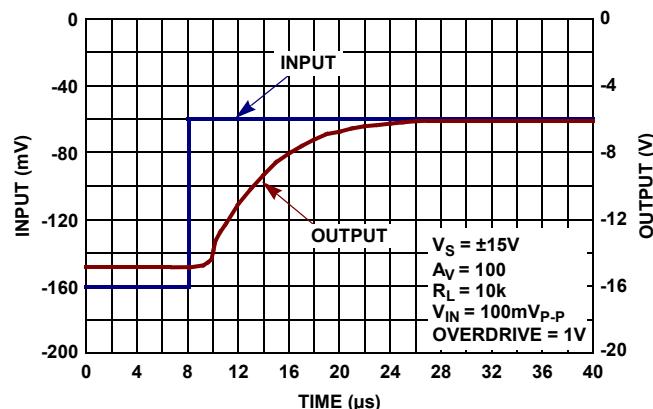


FIGURE 51. NEGATIVE OUTPUT OVERLOAD RESPONSE TIME,
 $V_S = \pm 15V$

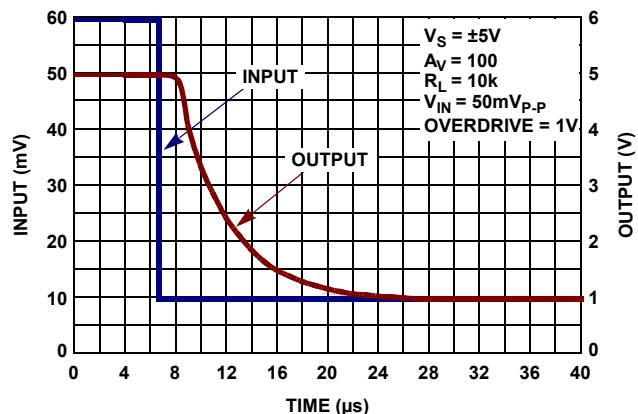


FIGURE 52. POSITIVE OUTPUT OVERLOAD RESPONSE TIME,
 $V_S = \pm 5V$

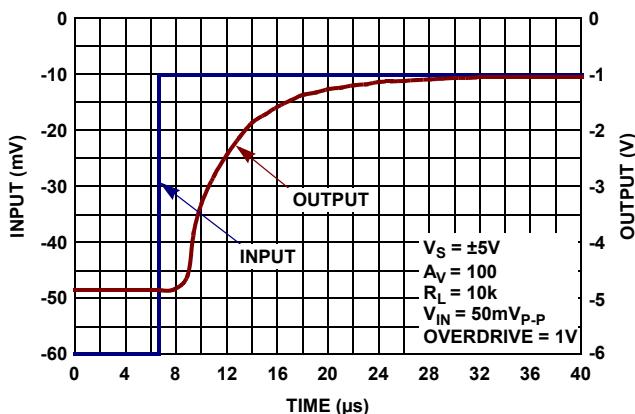


FIGURE 53. NEGATIVE OUTPUT OVERLOAD RESPONSE TIME,
 $V_S = \pm 5V$

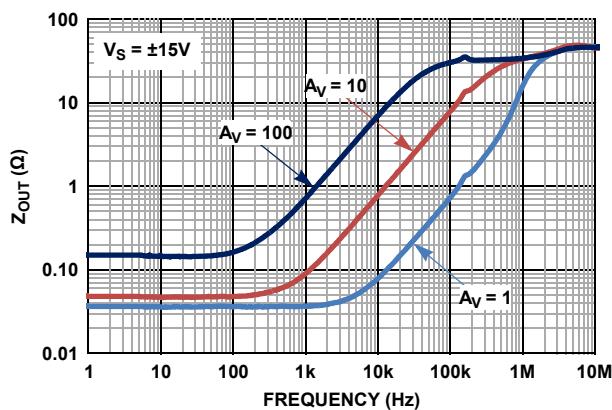


FIGURE 54. OUTPUT IMPEDANCE vs FREQUENCY, $V_S = \pm 15V$

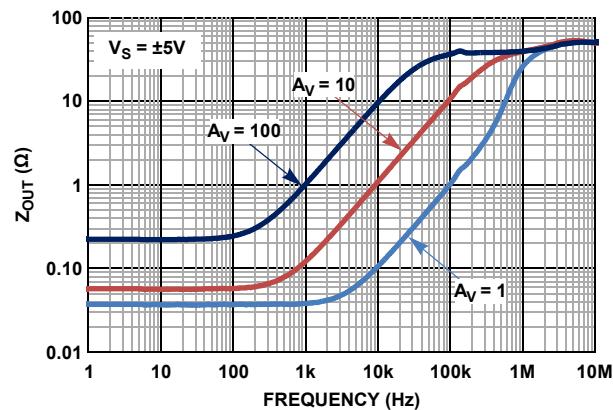


FIGURE 55. OUTPUT IMPEDANCE vs FREQUENCY, $V_S = \pm 5V$

Typical Performance Curves $V_S = \pm 15V, V_{CM} = 0V, R_L = \text{Open}, T_A = +25^\circ C$, unless otherwise specified. (Continued)

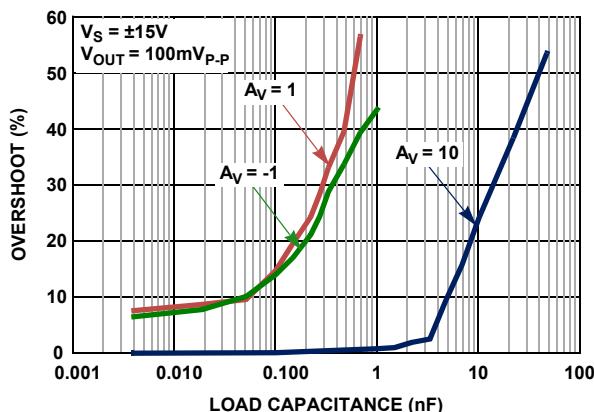


FIGURE 56. OVERRUSH vs CAPACITIVE LOAD, $V_S = \pm 15V$

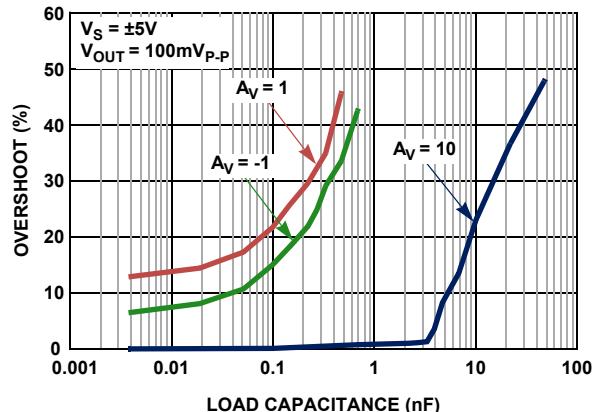


FIGURE 57. OVERRUSH vs CAPACITIVE LOAD, $V_S = \pm 5V$

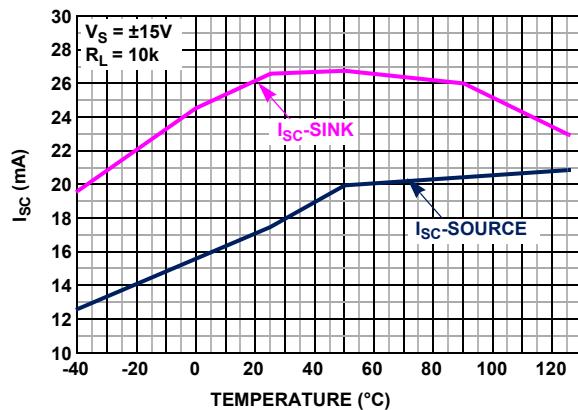


FIGURE 58. ISL28118 SHORT CIRCUIT CURRENT vs TEMPERATURE, $V_S = \pm 15V$

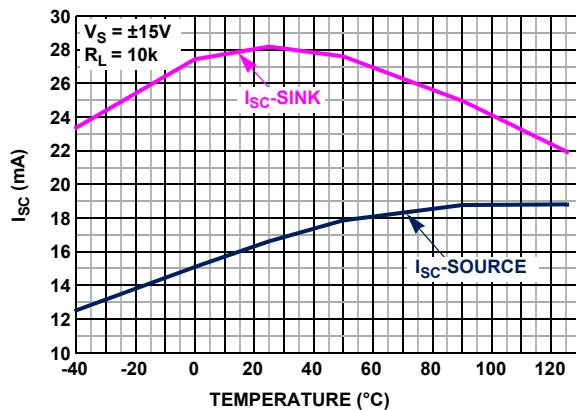


FIGURE 59. ISL28218 SHORT CIRCUIT CURRENT vs TEMPERATURE, $V_S = \pm 15V$

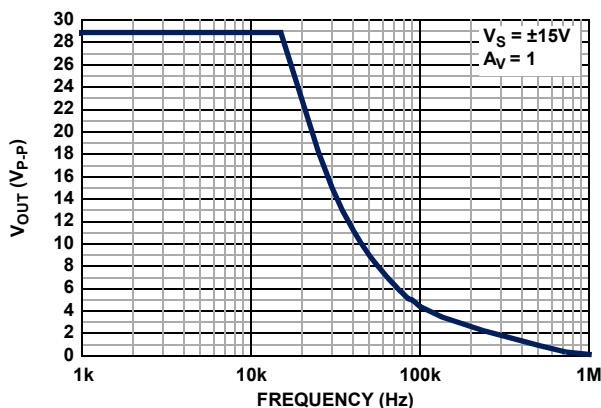


FIGURE 60. MAX OUTPUT VOLTAGE vs FREQUENCY

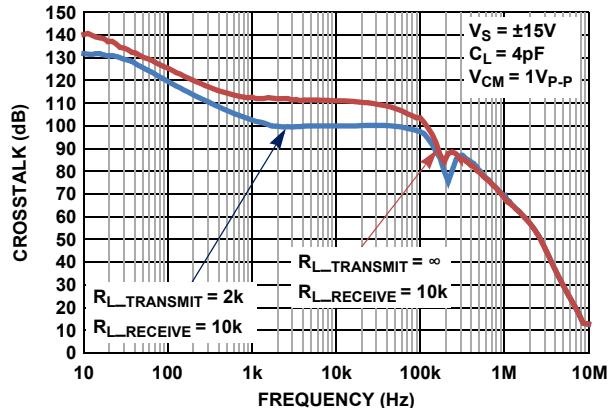


FIGURE 61. CHANNEL SEPARATION vs FREQUENCY, $R_L = \infty$, $V_S = \pm 15V$

Applications Information

Functional Description

The ISL28118 and ISL28218 are single and dual, 3.2MHz, single-supply, rail-to-rail output amplifiers with a common mode input voltage range extending to a range of 0.5V below the V- rail. Their input stages are optimized for precision sensing of ground-referenced signals in single-supply applications. The input stage is able to handle large input differential voltages without phase inversion, making these amplifiers suitable for high-voltage comparator applications. Their bipolar design features high open loop gain and excellent DC input and output temperature stability. These op amps feature very low quiescent current of 850 μ A, and low temperature drift. Both devices are fabricated in a new precision 40V complementary bipolar DI process and are immune from latch-up.

Operating Voltage Range

The op amp is designed to operate over a single supply range of 3V to 40V or a split supply voltage range of +1.8V/-1.2V to \pm 20V. The device is fully characterized at 10V (\pm 5V) and 30V (\pm 15V). Both DC and AC performance remain virtually unchanged over the complete operating voltage range. Parameter variation with operating voltage is shown in the "Typical Performance Curves" beginning on page 7.

The input common mode voltage to the V+ rail (V+ -1.8V over the full temperature range) may limit amplifier operation when operating from split V+ and V- supplies. Figure 12 shows the common mode input voltage range variation over temperature.

Input Stage Performance

The ISL28118 and ISL28218 PNP input stage has a common mode input range extending up to 0.5V below ground at +25°C (Figure 12). Full amplifier performance is guaranteed down for input voltage down to ground (V-) over the -40°C to +125°C temperature range. For common mode voltages down to -0.5V below ground (V-), the amplifiers are fully functional, but performance degrades slightly over the full temperature range. This feature provides excellent CMRR, AC performance, and DC accuracy when amplifying low-level, ground-referenced signals.

The input stage has a maximum input differential voltage equal to a diode drop greater than the supply voltage (max 42V) and does not contain the back-to-back input protection diodes found on many similar amplifiers. This feature enables the device to function as a precision comparator by maintaining very high input impedance for high-voltage differential input comparator voltages. The high differential input impedance also enables the device to operate reliably in large signal pulse applications, without the need for anti-parallel clamp diodes required on MOSFET and most bipolar input stage op amps. Thus, input signal distortion caused by nonlinear clamps under high slew rate conditions is avoided.

In applications where one or both amplifier input terminals are at risk of exposure to voltages beyond the supply rails, current-limiting resistors may be needed at each input terminal (see Figure 62, R_{IN+}, R_{IN-}) to limit current through the power-supply ESD diodes to 20mA.

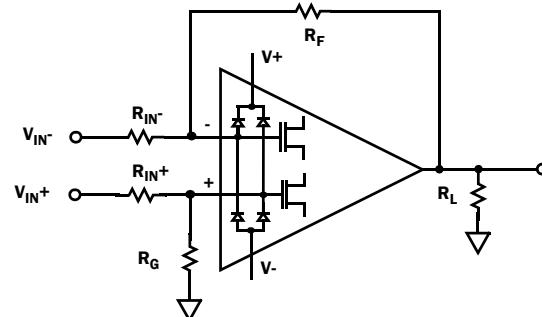


FIGURE 62. INPUT ESD DIODE CURRENT LIMITING

Output Drive Capability

The bipolar rail-to-rail output stage features low saturation levels that enable an output voltage swing to less than 15mV when the total output load (including feedback resistance) is held below 50 μ A (Figures 31 and 32). With \pm 15V supplies, this can be achieved by using feedback resistor values >300k Ω .

The output stage is internally current limited. Output current limit over temperature is shown in Figures 33 and 34. The amplifiers can withstand a short circuit to either rail as long as the power dissipation limits are not exceeded. This applies to only one amplifier at a time for the dual op amp. Continuous operation under these conditions may degrade long-term reliability.

The amplifiers perform well when driving capacitive loads (Figures 56 and 57). The unity gain, voltage follower (buffer) configuration provides the highest bandwidth but is also the most sensitive to ringing produced by load capacitance found in BNC cables. Unity gain overshoot is limited to 35% at capacitance values to 0.33nF. At gains of 10 and higher, the device is capable of driving more than 10nF without significant overshoot.

Output Phase Reversal

Output phase reversal is a change of polarity in the amplifier transfer function when the input voltage exceeds the supply voltage. The ISL28118 and ISL28218 are immune to output phase reversal out to 0.5V beyond the rail (V_{ABS MAX}) limit (Figure 49).

Single Channel Usage

The ISL28218 is a dual op amp. If the application requires only one channel, the user must configure the unused channel to prevent it from oscillating. The unused channel oscillates if the input and output pins are floating. This results in higher-than-expected supply currents and possible noise injection into the channel being used. The proper way to prevent oscillation is to short the output to the inverting input, and ground the positive input (Figure 63).




FIGURE 63. PREVENTING OSCILLATIONS IN UNUSED CHANNELS

Power Dissipation

It is possible to exceed the +150°C maximum junction temperatures under certain load and power supply conditions. It is therefore important to calculate the maximum junction temperature (T_{JMAX}) for all applications to determine if power supply voltages, load conditions, or package type need to be modified to remain in the safe operating area. These parameters are related using Equation 1:

$$T_{JMAX} = T_{MAX} + \theta_{JA} \times P_{D MAX TOTAL} \quad (\text{EQ. 1})$$

where

- $P_{D MAX TOTAL}$ is the sum of the maximum power dissipation of each amplifier in the package ($P_{D MAX}$)
- T_{MAX} = Maximum ambient temperature
- θ_{JA} = Thermal resistance of the package

$P_{D MAX}$ for each amplifier can be calculated using Equation 2:

$$P_{D MAX} = V_S \times I_{q MAX} + (V_S - V_{OUT MAX}) \times \frac{V_{OUT MAX}}{R_L} \quad (\text{EQ. 2})$$

where

- $P_{D MAX}$ = Maximum power dissipation of 1 amplifier
- V_S = Total supply voltage
- $I_{q MAX}$ = Maximum quiescent supply current of one amplifier
- $V_{OUT MAX}$ = Maximum output voltage swing of the application
- R_L = Load resistance

ISL28118 and ISL28218 SPICE Model

Figure 64 shows the SPICE model schematic and Figure 65 shows the net list for the SPICE model. The model is a simplified version of the actual device and simulates important AC and DC parameters. AC parameters incorporated into the model are: 1/f and flatband noise voltage, slew rate, CMRR, and gain and phase. The DC parameters are I_{OS} , total supply current, and output voltage swing. The model uses typical parameters given in the "Electrical Specifications" table beginning on page 3. The AVOL is adjusted for 136dB with the dominant pole at 0.6Hz. The CMRR is set at 120dB, $f = 50\text{kHz}$. The input stage models the actual device to present an accurate AC representation. The model is configured for an ambient temperature of +25°C.

Figures 66 through 80 show the characterization vs simulation results for the noise voltage, open loop gain phase, closed loop gain vs frequency, gain vs frequency vs R_L , CMRR, large signal 10V step response, small signal 0.1V step, and output voltage swing ±15V supplies.

LICENSE STATEMENT

The information in the SPICE model is protected under United States copyright laws. Intersil Corporation hereby grants users of this macro-model, hereto referred to as "Licensee", a nonexclusive, nontransferable licence to use this model, as long as the Licensee abides by the terms of this agreement. Before using this macro-model, the Licensee should read this license. If the Licensee does not accept these terms, permission to use the model is not granted.

The Licensee may not sell, loan, rent, or license the macro-model, in whole, in part, or in modified form, to anyone outside the Licensee's company. The Licensee may modify the macro-model to suit his/her specific applications, and the Licensee may make copies of this macro-model for use within their company only.

This macro-model is provided "AS IS, WHERE IS, AND WITH NO WARRANTY OF ANY KIND EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE."

In no event will Intersil be liable for special, collateral, incidental, or consequential damages in connection with, or arising out of, the use of this macro-model. Intersil reserves the right to make changes to the product and the macro-model without prior notice.

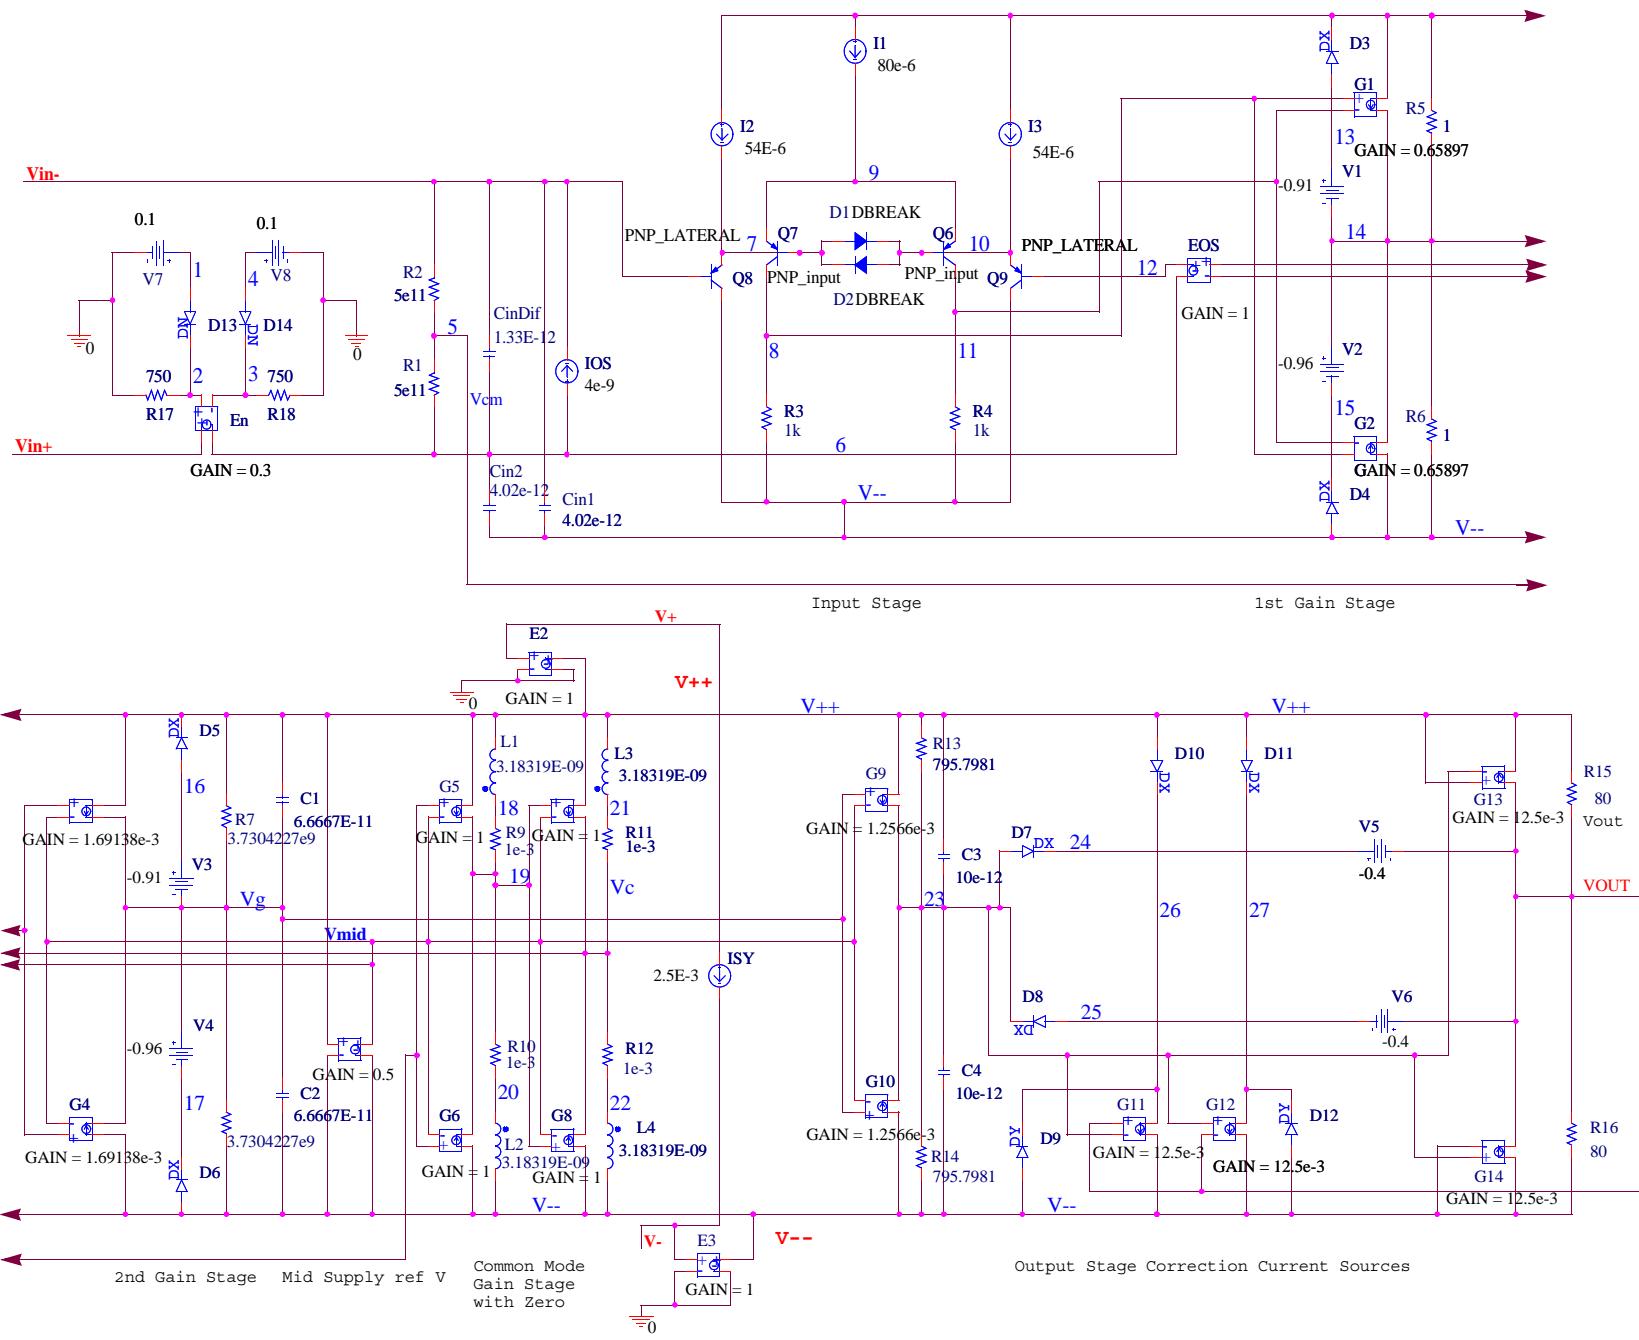


FIGURE 64. SPICE SCHEMATIC

ISL28118, ISL28218

*ISL28118_218 Macromodel - covers following *products
 *ISL28118
 *ISL28218
 *

*Revision History:
 * Revision A, LaFontaine February 8th 2011
 * Model for Noise, supply currents, CMRR
 *120dB f = 40kHz, AVOL 136dB f = 0.5Hz
 * SR = 1.2V/us, GBWP 4MHz.
 *Copyright 2011 by Intersil Corporation
 *Refer to data sheet "LICENSE STATEMENT"
 *Use of this model indicates your acceptance
 *with the terms and provisions in the License
 *Statement.
 *

*Intended use:
 *This Pspice Macromodel is intended to give
 *typical DC and AC performance
 characteristics *under a wide range of
 external circuit *configurations using
 compatible simulation *platforms – such as
 iSim PE.
 *

*Device performance features supported by
 this *model:
 *Typical, room temp., nominal power supply
 *voltages used to produce the following
 *characteristics:
 *Open and closed loop I/O impedances,
 *Open loop gain and phase,
 *Closed loop bandwidth and frequency
 *response,
 *Loading effects on closed loop frequency
 *response,
 *Input noise terms including 1/f effects,
 *Slew rate,
 *Input and Output Headroom limits to I/O
 *voltage swing,
 *Supply current at nominal specified supply
 *voltages,
 *

*Device performance features NOT
 supported *by this model:
 *Harmonic distortion effects,
 *Output current limiting (current will limit at
 *40mA),
 *Disable operation (if any),
 *Thermal effects and/or over temperature
 *parameter variation,
 *Limited performance variation vs. supply
 *voltage is modeled,
 *Part to part performance variation due to
 *normal process parameter spread,
 *Any performance difference arising from
 *different packaging,
 *Load current reflected into the power supply
 *current.

* source ISL28118_218 SPICEmodel
 *

* Connections: +input
 * | -input
 * | +Vsupply
 * | -Vsupply
 * | | output
 .subckt ISL28118_218 Vin+ Vin-V+ V- VOUT
 * source ISL28118_218_presubckt_0
 *

*Voltage Noise
 E_En VIN+ 6 2 0 0.3
 D_D13 1 2 DN
 D_D14 1 2 DN
 V_V7 1 0 0.1

V_V8	4 0 0.1	R_R14	V- 23 795.7981
R_R17	2 0 750	C_C3	23 V++ 10e-12
*R_R18	3 0 750	C_C4	V- 23 10e-12
*		*	
*Input Stage		*Output Stage with Correction Current Sources	
Q_Q6	11 10 9 PNP_input	G_G11	26 V- VOUT 23 12.5e-3
Q_Q7	8 7 9 PNP_input	G_G12	27 V- 23 VOUT 12.5e-3
Q_Q8	V- VIN- 7 PNP_LATERAL	G_G13	VOUT V++ V++ 23 12.5e-3
Q_Q9	V- 12 10 PNP_LATERAL	G_G14	V- VOUT 23 V- 12.5e-3
I_I1	V++ 9 DC 80e-6	D_D7	23 24 DX
I_I2	V++ 7 DC 54E-6	D_D8	25 23 DX
I_I3	V++ 10 DC 54E-6	D_D9	V- 26 DY
I_IOS	6 VIN- DC 4e-9	D_D10	V++ 26 DX
*D_D1	7 10 DBREAK	D_D11	V++ 27 DX
*D_D2	10 7 DBREAK	D_D12	V- 27 DY
R_R1	5 6 .5e11	V_V5	24 VOUT -0.4
R_R2	VIN- 5 5e11	V_V6	VOUT 25 -0.4
R_R3	V- 8 1000	R_R15	VOUT V++ 80
R_R4	V- 11 1000	R_R16	V- VOUT 80
C_Cin1	V- VIN- 4.02e-12	.model PNP_LATERAL pnp(is=1e-016 bf=250 va=80 + ik=0.138 rb=0.01 re=0.101 rc=180 kf=0 af=1)	
C_Cin2	V- 6 4.02e-12	.model PNP_input pnp(is=1e-016 bf=100 va=80 + ik=0.138 rb=0.01 re=0.101 rc=180 kf=0 af=1)	
C_CinDif	6 VIN- 1.33E-12	.model DBREAK D(bv=43 rs=1) .model DN D(KF=6.69e-9 AF=1) .MODEL DX D(IS=1E-12 Rs=0.1) .MODEL DY D(IS=1E-15 BV=50 Rs=1) .ends ISL28118_218	
*			
*1st Gain Stage			
G_G1	V++ 14 8 11 0.65897	G_G3	V++ VG 14 VMID 1.69138e-3
G_G2	V- 14 8 11 0.65897	G_G4	V- VG 14 VMID 1.69138e-3
V_V1	13 14 -0.91	V_V3	16 VG -0.91
V_V2	14 15 -0.96	V_V4	VG 17 -0.96
D_D3	13 V++ DX	D_D5	16 V++ DX
D_D4	V- 15 DX	D_D6	V- 17 DX
R_R5	14 V++ 1	R_R7	VG V++ 3.7304227e9
R_R6	V- 14 1	R_R8	V- VG 3.7304227e9
*		C_C1	VG V++ 6.6667E-11
*		C_C2	V- VG 6.6667E-11
*		*	
*2nd Gain Stage			
G_G3	V++ VG 14 VMID 1.69138e-3	G_G5	V++ 19 5 VMID 1
G_G4	V- VG 14 VMID 1.69138e-3	G_G6	V- 19 5 VMID 1
V_V3	16 VG -0.91	G_G7	V++ VC 19 VMID 1
V_V4	VG 17 -0.96	G_G8	V- VC 19 VMID 1
D_D5	16 V++ DX	E_EOS	12 6 VC VMID 1
D_D6	V- 17 DX	L_L1	18 V++ 3.18319E-09
R_R7	VG V++ 3.7304227e9	L_L2	20 V- 3.18319E-09
R_R8	V- VG 3.7304227e9	L_L3	21 V++ 3.18319E-09
C_C1	VG V++ 6.6667E-11	L_L4	22 V- 3.18319E-09
C_C2	V- VG 6.6667E-11	R_R9	19 18 1e-3
*		R_R10	20 19 1e-3
*		R_R11	VC 21 1e-3
*		R_R12	22 VC 1e-3
*		*	
*Common Mode Gain Stage with Zero			
G_G5	V++ 19 5 VMID 1	G_G9	V++ 23 VG VMID 1.2566e-3
G_G6	V- 19 5 VMID 1	G_G10	V- 23 VG VMID 1.2566e-3
G_G7	V++ VC 19 VMID 1	R_R13	23 V++ 795.7981
G_G8	V- VC 19 VMID 1		
E_EOS	12 6 VC VMID 1		
L_L1	18 V++ 3.18319E-09		
L_L2	20 V- 3.18319E-09		
L_L3	21 V++ 3.18319E-09		
L_L4	22 V- 3.18319E-09		
R_R9	19 18 1e-3		
R_R10	20 19 1e-3		
R_R11	VC 21 1e-3		
R_R12	22 VC 1e-3		
*			
*Pole Stage			
G_G9	V++ 23 VG VMID 1.2566e-3		
G_G10	V- 23 VG VMID 1.2566e-3		
R_R13	23 V++ 795.7981		

FIGURE 65. SPICE NET LIST

Characterization vs Simulation Results

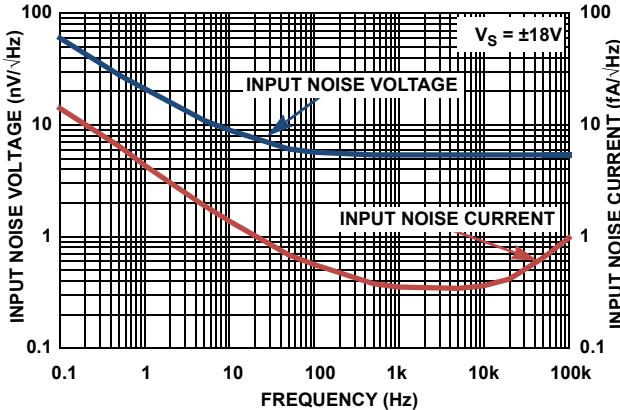


FIGURE 66. CHARACTERIZED INPUT NOISE VOLTAGE

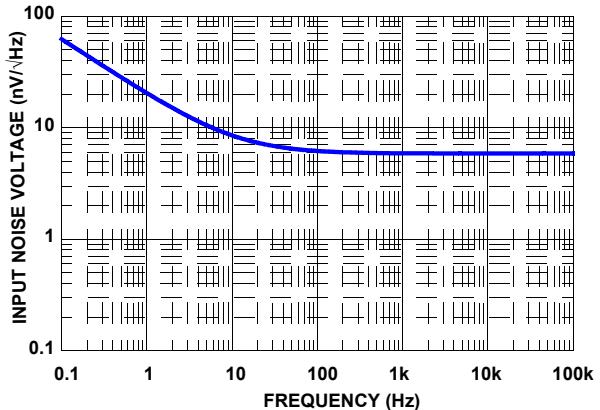


FIGURE 67. SIMULATED INPUT NOISE VOLTAGE

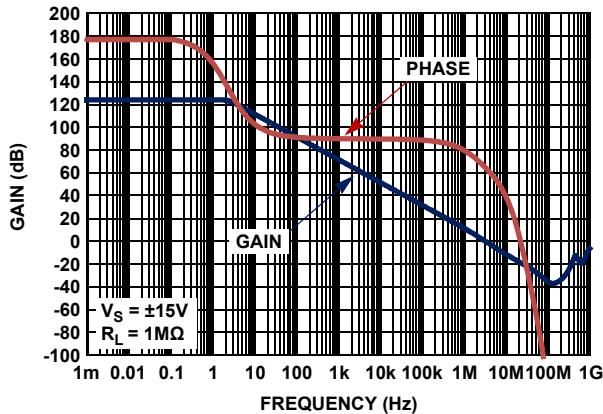


FIGURE 68. CHARACTERIZED OPEN-LOOP GAIN, PHASE vs FREQUENCY

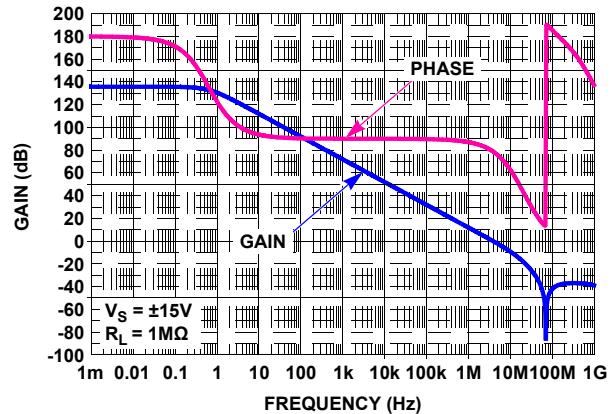


FIGURE 69. SIMULATED OPEN-LOOP GAIN, PHASE vs FREQUENCY

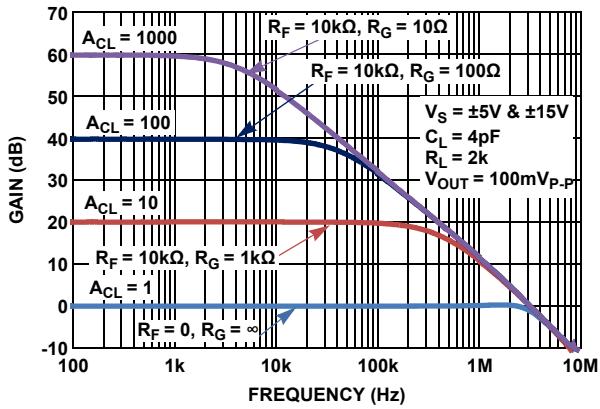


FIGURE 70. CHARACTERIZED CLOSED-LOOP GAIN vs FREQUENCY

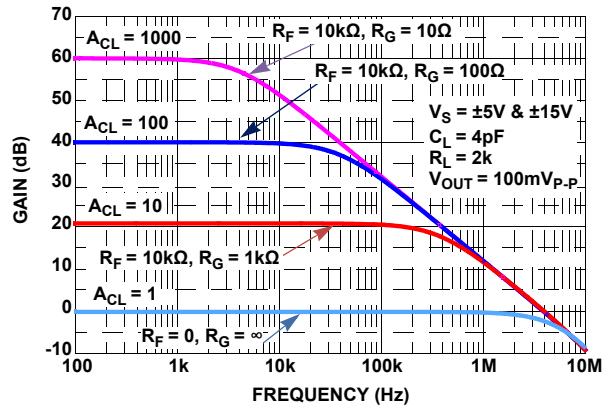


FIGURE 71. SIMULATED CLOSED-LOOP GAIN vs FREQUENCY

Characterization vs Simulation Results (Continued)

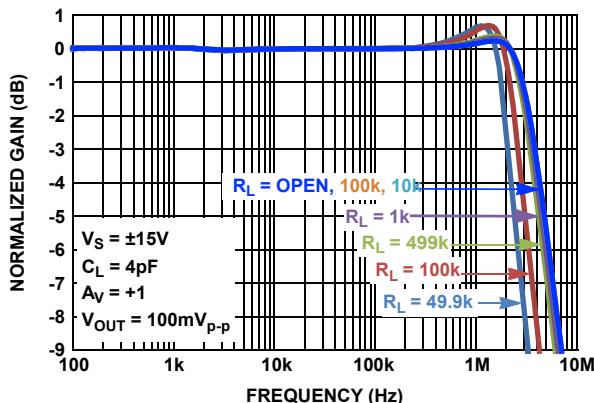


FIGURE 72. CHARACTERIZED GAIN vs FREQUENCY vs R_L

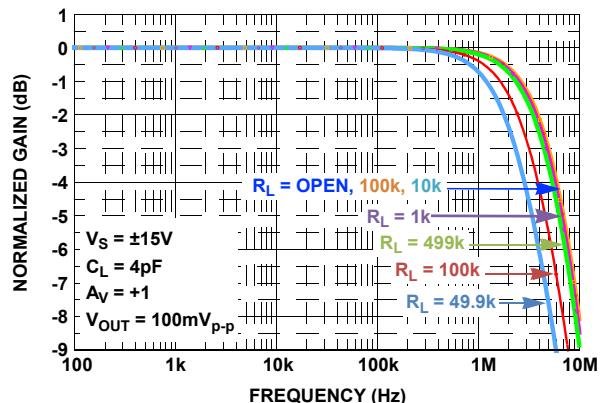


FIGURE 73. SIMULATED GAIN vs FREQUENCY vs R_L

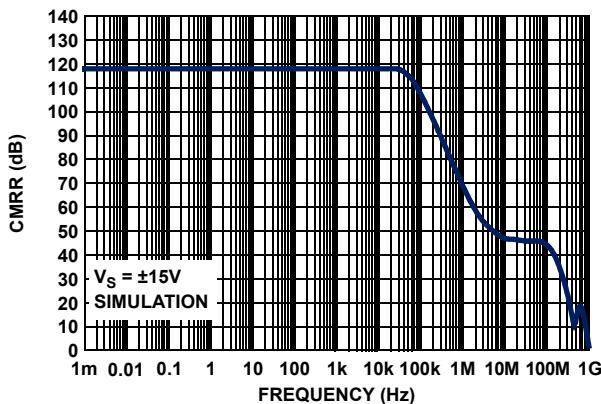


FIGURE 74. CHARACTERIZED CMRR vs FREQUENCY

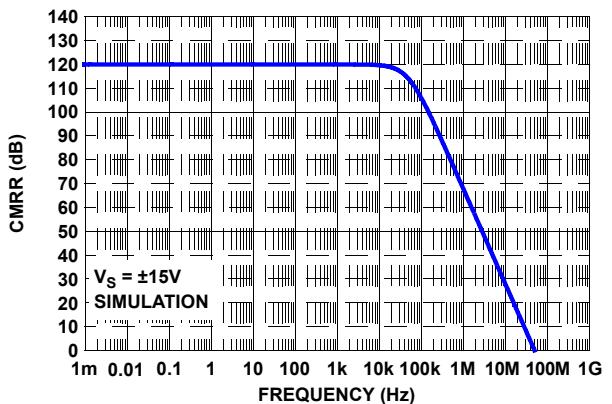


FIGURE 75. SIMULATED CMRR vs FREQUENCY

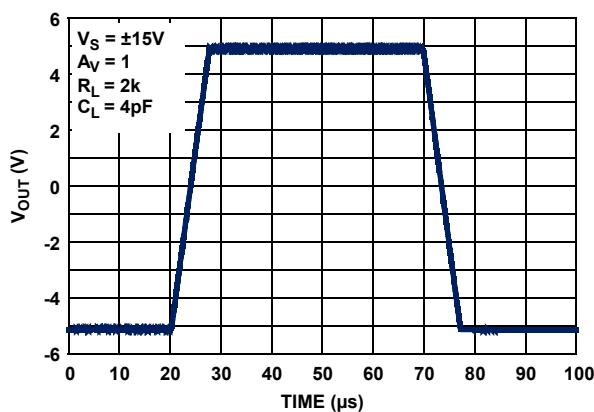


FIGURE 76. CHARACTERIZED LARGE-SIGNAL 10V STEP RESPONSE

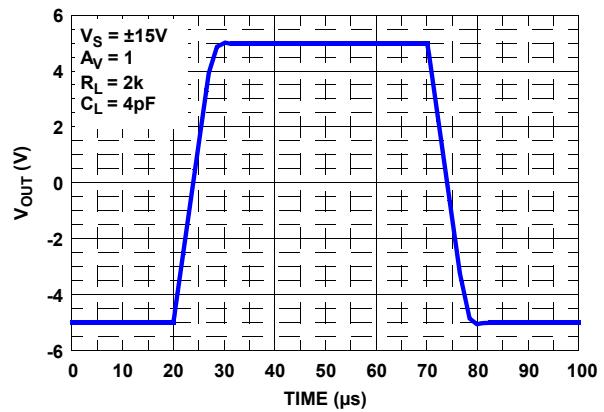


FIGURE 77. SIMULATED LARGE-SIGNAL 10V STEP RESPONSE

Characterization vs Simulation Results (Continued)

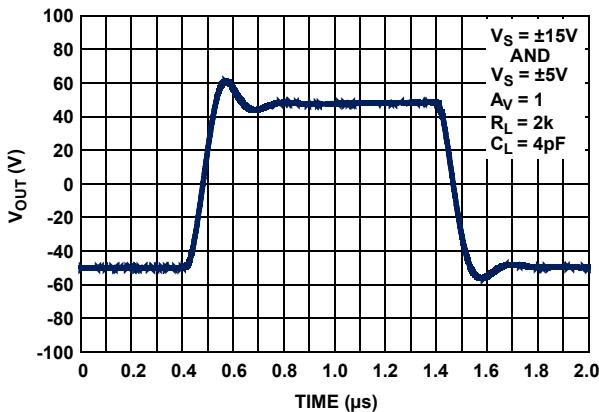


FIGURE 78. CHARACTERIZED SMALL-SIGNAL TRANSIENT RESPONSE

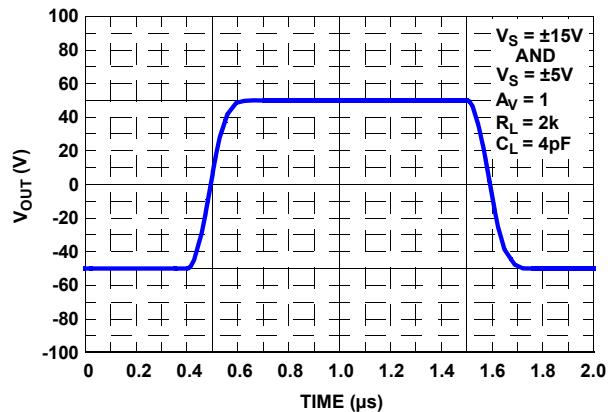


FIGURE 79. SIMULATED SMALL-SIGNAL TRANSIENT RESPONSE

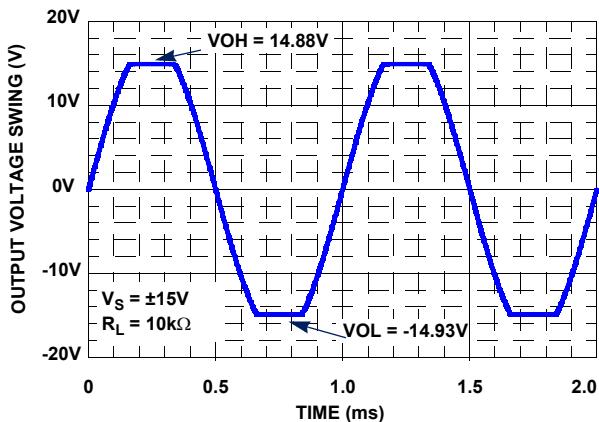


FIGURE 80. SIMULATED OUTPUT VOLTAGE SWING

For additional products, see www.intersil.com/product_tree

Intersil products are manufactured, assembled and tested utilizing ISO9000 quality systems as noted in the quality certifications found at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com

Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to web to make sure you have the latest Rev.

DATE	REVISION	CHANGE
1/24/2013	FN7532.4	<p>Added ISL28218 MSOP specifications, and removed references to ISL28118 and ISL28218 TDFN options.</p> <p>page 1: Removed "8 Ld TDFN" from last paragraph of description.</p> <p>page 2: Removed TDFN "Pin Configurations", and TDFN columns and the "PAD" row from "Pin Descr" table.</p> <p>Moved Ordering Information table from pg 3 to page 2. Removed "Coming Soon" from ISL28218FUZ and added "Note 1" reference, and deleted 2 TDFN offerings in "Ordering Info" table.</p> <p>page 3: Removed TDFN entries from "Thermal Resistance" section, and removed notes 5 and 6.</p> <p>Added delta Vos MSOP row, with limits of $\pm 390\mu A$, and added "ISL28218" to the CMRR MSOP entry.</p> <p>page 4: added "ISL28218" to the existing AVOL MSOP entry.</p> <p>page 5: added new $+25^\circ C$ 28218 MSOP row with 107dB min limit, and added "ISL28218 MSOP" to the existing ISL28118 MSOP full temp row for PSRR.</p> <p>page 5: added "ISL28218" to the existing CMRR SOIC and MSOP rows, and deleted the "ISL28218" rows.</p> <p>page 5: added "ISL28218 MSOP" to the existing ISL28118 MSOP rows for AVOL.</p> <p>page 7: added "$+25^\circ C$" to "default conditions" info at top of page.</p> <p>Moved "sales Info" from p25 to p23.</p> <p>Removed TDFN package outline drawing.</p>
8/31/2011	FN7532.3	<p>Page 7: Electrical Spec Table for Supply Current/Amplifier</p> <p>Change from: $1.4\mu A$ Full Temp Max</p> <p>Change to: $1.4mA$ Full Temp Max</p> <p>Page 28: Updated POD M8.118 to current revision. Corrected lead width dimension in side view 1 from "0.25 - 0.036" to "0.25 - 0.36".</p>
5/9/2011	FN7532.2	<p>Page 2: Added NC pin to Pin Descriptions table.</p> <p>Page 3: Added ISL28218EVAL1Z evaluation board to the Ordering Information table.</p> <p>Page 12: Added new Output Overhead Voltage plots (Figs. 31,32)</p> <p>Pages 19 through 24: Added SPICE model schematic, netlist, description and Figs. 66 through 80.</p>
11/12/10	FN7532.1	<p>On page 1: Features Section, added Low input offset voltage and superb offset voltage temperature drift for ISL28118.</p> <p>Updated Intersil trademark statement (bottom of page)</p> <p>On page 2: Removed "coming soon" from ISL28118FBZ. Updated tape & reel note.</p> <p>On page 3: Change ISL28118 Theta JA value from 158 to 165. Added ISL28118 min/max specs to VOS (input offset voltage), TCVOS and min specs to CMRR.</p> <p>On page 4: Added AVOL MIN spec for ISL28118 in dB. Changed existing AVOL spec from V/mV to dB. Added VOL max spec for ISL28118, IS Typ and Max spec for ISL28118. Changed TS from $18\mu s$ to $8.5\mu s$.</p> <p>On page 5: Added Min Max VOS spec, TCVOS spec for ISL28118. Changed AVOL specs from V/mV to dB.</p> <p>On page 6: Changed Slew Rate TYP from $\pm 1.2V/\mu s$ to $\pm 1V/\mu s$. Added for TS TYP spec = $4\mu s$. Changed min/max note 6 to "Compliance to datasheet limits is assured by one or more methods: production test, characterization and/or design." Added Figs 3 & 4 for ISL28118. Figures 5 & 6 moved to page 7.</p> <p>On page 7: Added Figures 7 & 8</p> <p>On page 9: Added Figures 15 & 16 for ISL28118</p> <p>On page 9, in Figure 19, changed VS from $\pm 5V$ to $\pm 15V$</p> <p>On page 11 and page 12: Added Figures 27, 28, 31 & 34 for ISL28118</p> <p>On page 12: Added Figure 35 for ISL28118</p> <p>On page 13: Figure 41 changed VS from $\pm 18V$ to $\pm 5V$, Figure 42 added RL = 2k, Figure 43 added RL = 10k and corrected "HD+N" to "THD+N"</p> <p>On page 14, Figure 44 added RL = 2k, Figure 45 RL = 10k.</p> <p>On page 16: Added Figure 58 for ISL28118</p> <p>On page 16, Figure 58 and 59, graph upper left corner changed VS = $\pm 5V$ to VS = $\pm 15V$</p> <p>On page 16, Figure 61, deleted VS = $\pm 5V$</p>
9/16/10	FN7532.0	Initial Release

About Intersil

Intersil Corporation is a leader in the design and manufacture of high-performance analog, mixed-signal and power management semiconductors. The company's products address some of the fastest growing markets within the industrial and infrastructure, personal computing and high-end consumer markets. For more information about Intersil or to find out how to become a member of our winning team, visit our website and career page at www.intersil.com.

For a complete listing of Applications, Related Documentation and Related Parts, please see the respective product information page. Also, please check the product information page to ensure that you have the most updated datasheet: [ISL28118](http://www.intersil.com/ISL28118), [ISL28218](http://www.intersil.com/ISL28218).

To report errors or suggestions for this datasheet, please go to: www.intersil.com/askourstaff






Reliability reports are available from our website at: <http://rel.intersil.com/reports/search.php>

Package Outline Drawing

M8.15E

8 LEAD NARROW BODY SMALL OUTLINE PLASTIC PACKAGE

Rev 0, 08/09

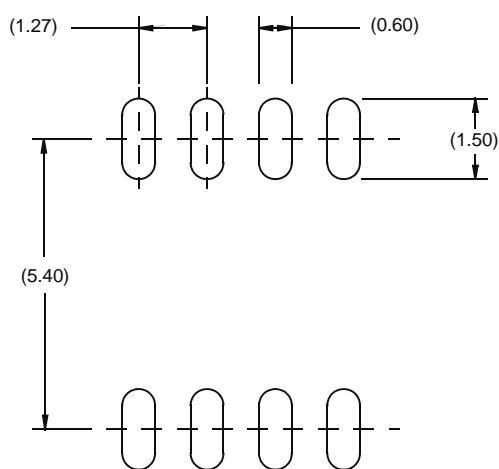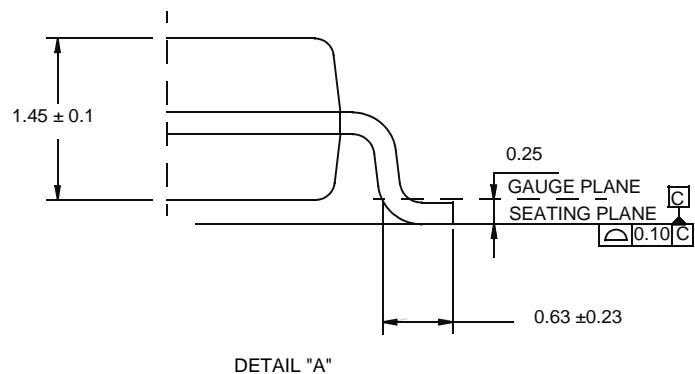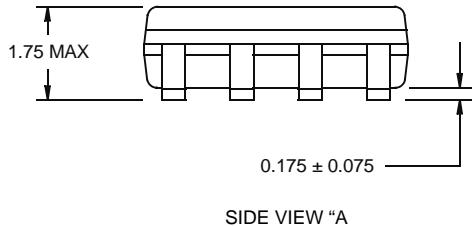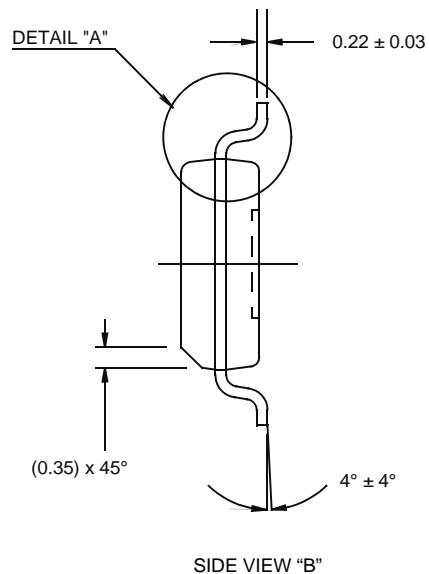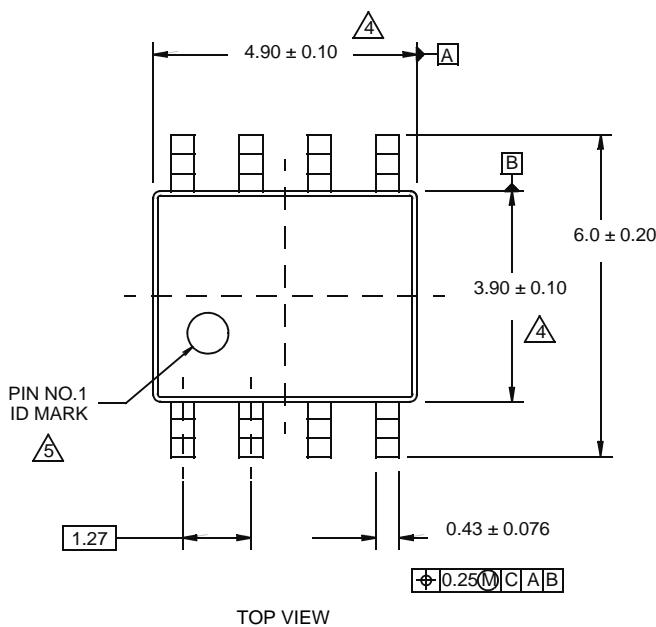

NOTES:



1. Dimensions are in millimeters.
Dimensions in () for Reference Only.
2. Dimensioning and tolerancing conform to AMSE Y14.5m-1994.
3. Unless otherwise specified, tolerance : Decimal ± 0.05
4. Dimension does not include interlead flash or protrusions.
Interlead flash or protrusions shall not exceed 0.25mm per side.
5. The pin #1 identifier may be either a mold or mark feature.
6. Reference to JEDEC MS-012.

Package Outline Drawing

M8.118

8 LEAD MINI SMALL OUTLINE PLASTIC PACKAGE

Rev 4, 7/11

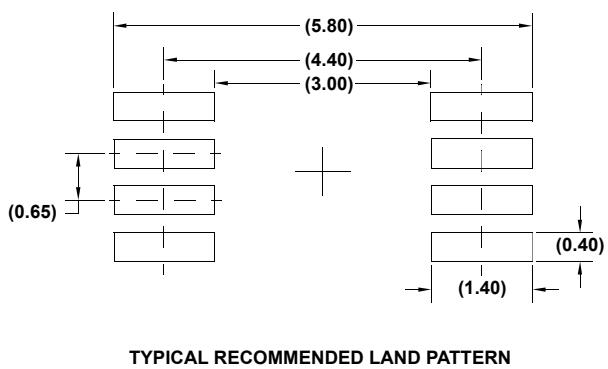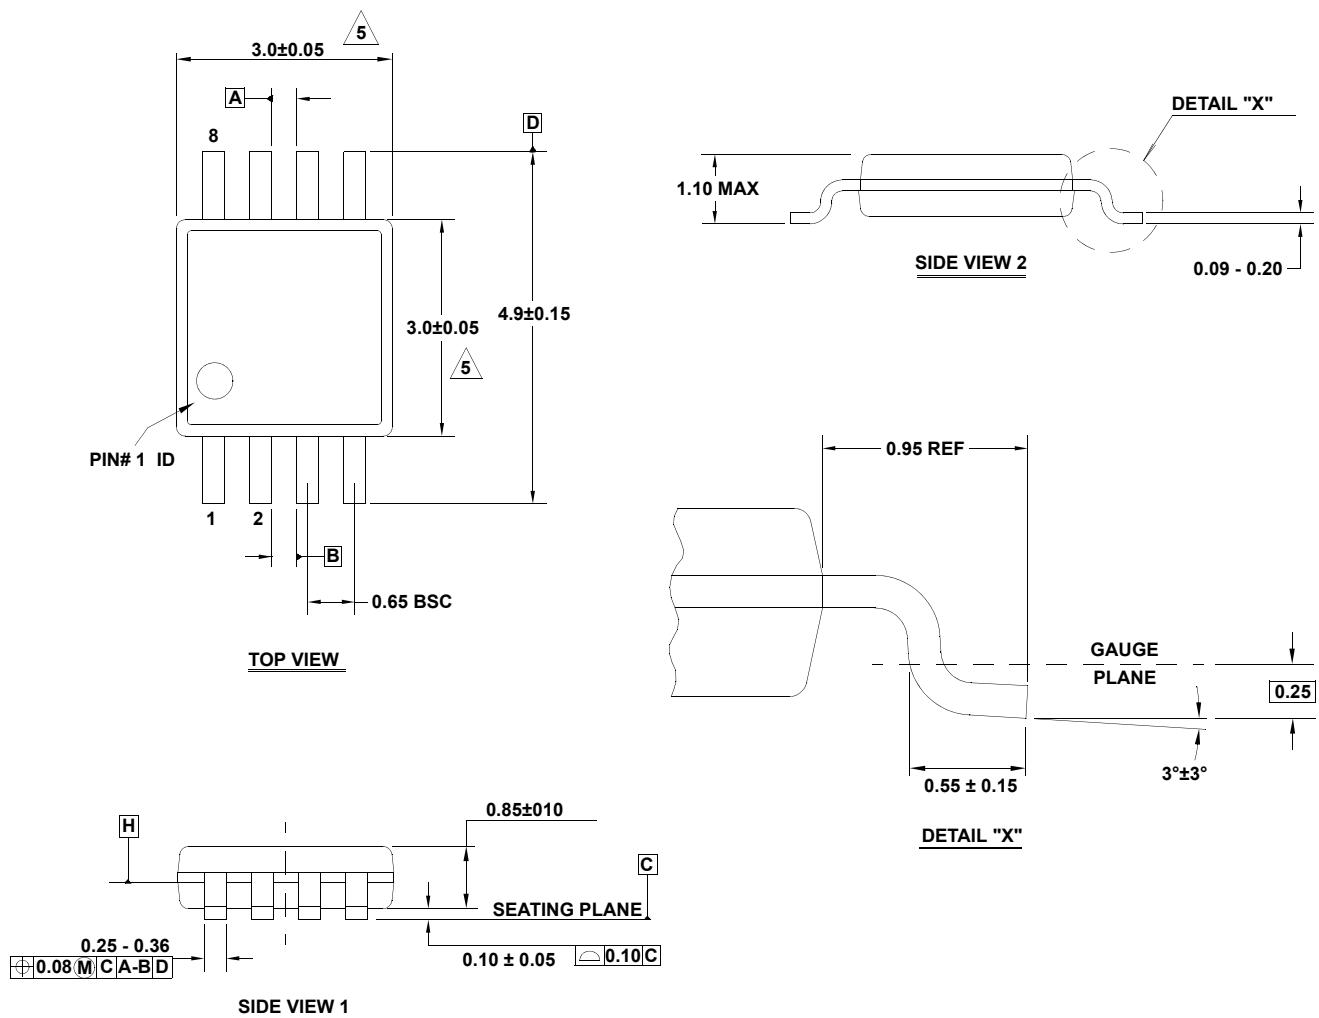

NOTES:

1. Dimensions are in millimeters.
2. Dimensioning and tolerancing conform to JEDEC MO-187-AA and AMSEY14.5m-1994.
3. Plastic or metal protrusions of 0.15mm max per side are not included.
4. Plastic interlead protrusions of 0.15mm max per side are not included.
5. Dimensions are measured at Datum Plane "H".
6. Dimensions in () are for reference only.