

HSE6-3RNT2

M

DRAWING
NUMBER

6

ISSUE

RELEASE NO. PR-15128

REPLACES

REVISIONS

REVISIONS

A PR15128

WJM 17 OCT 86

B C061177

WJK FEB 87

C 00-77364

GLH 16 AUG 94

D 204566

S.A.V. 14 DEC 01

E 0016895

VKR 18 NOV 05

CHECK

18 NOV 05

CHECK

BP

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK

CHECK

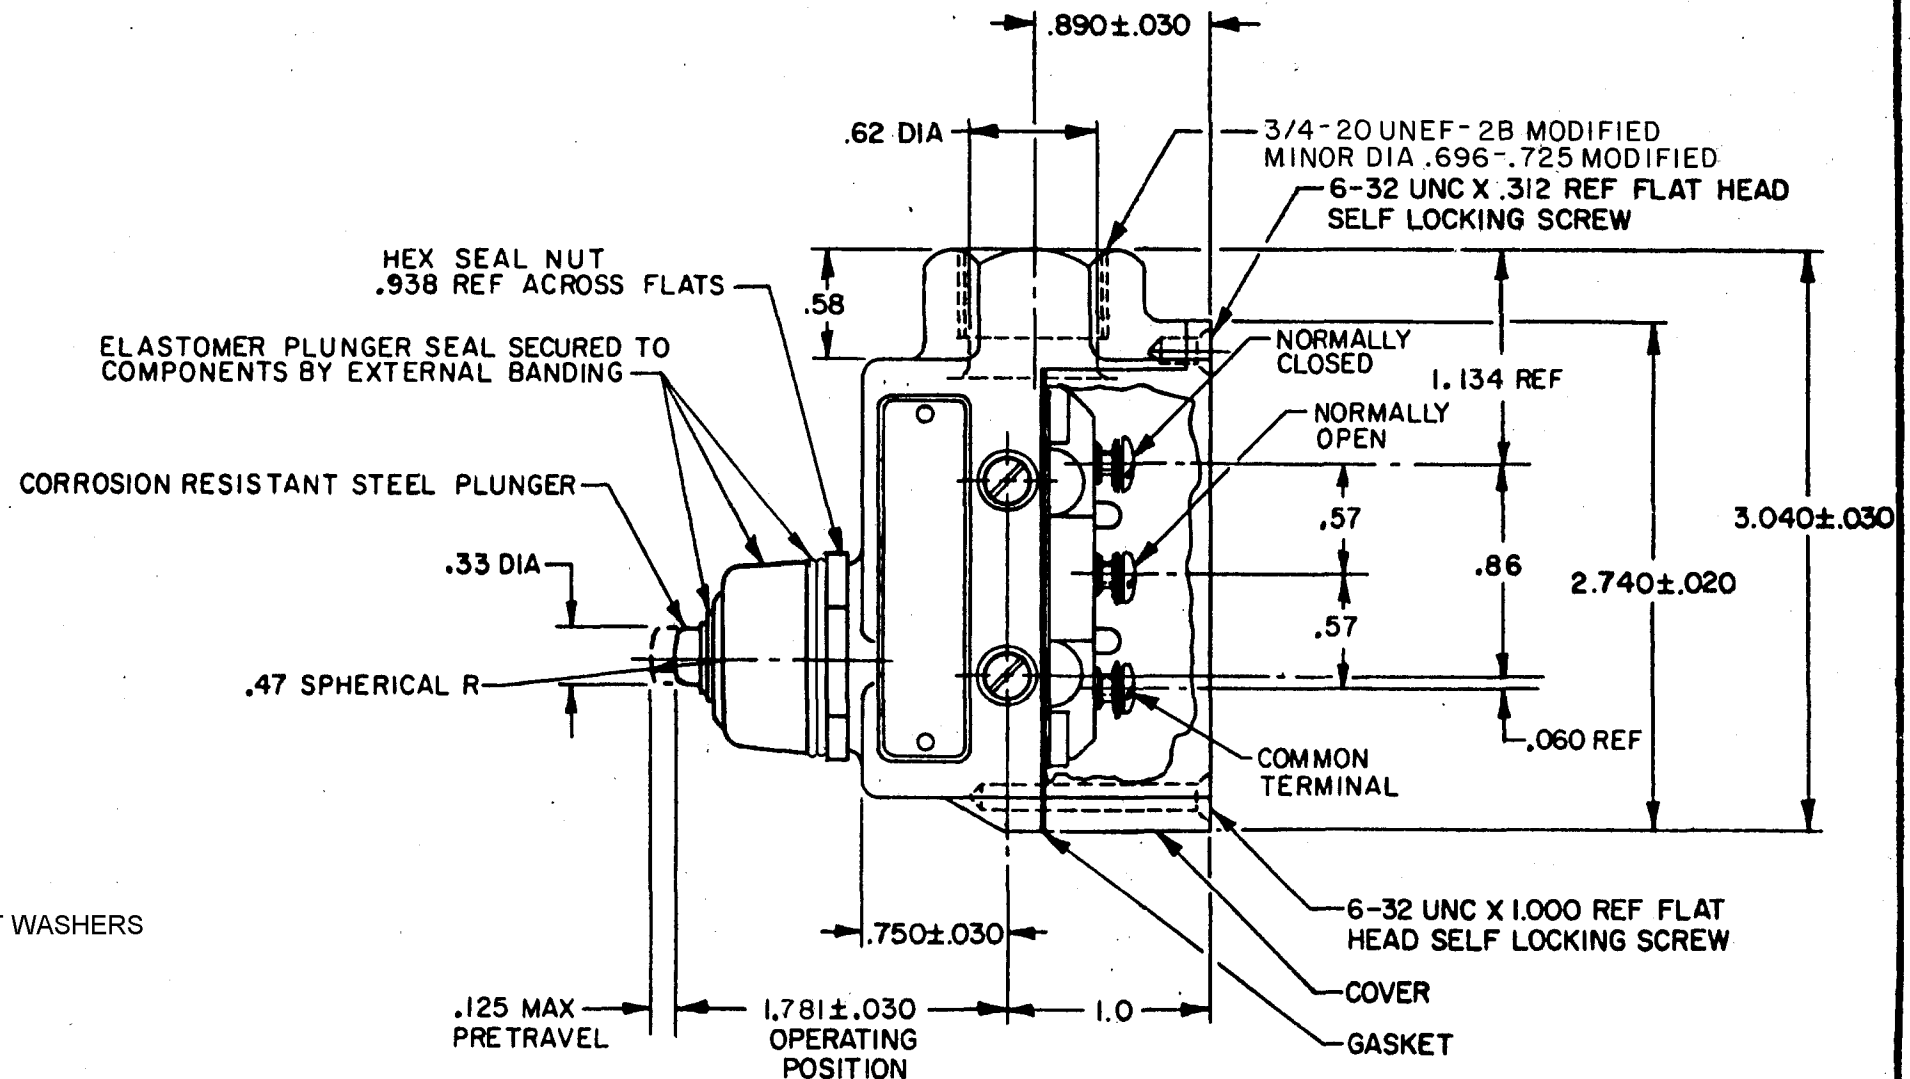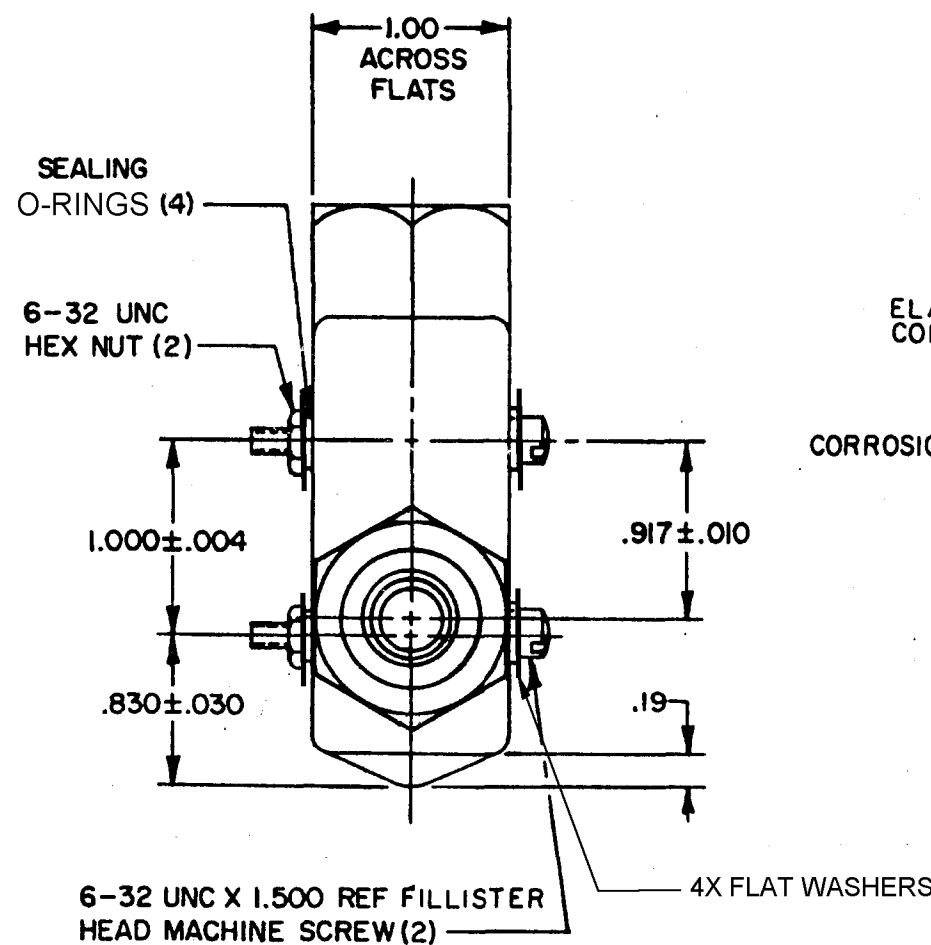

NOTES

- 1 - ZINC ENCLOSURE
- 2 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW
AND WASHER (SEMS) (3)
- 3 - SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURE
TO MINUS 65°F
- 4 - SEAL RATING: NEMA 1.3
IP 54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA		
OPERATING FORCE — — — 3 1/2 LB MAX	CONTACT ARRANGEMENT S P D T		
OVERTRAVEL — — — — .156 MIN			
RELEASE FORCE — — — — 1/2 LB MIN			
DIFFERENTIAL TRAVEL — — — — .020 MAX			
BASIC SWITCH REPLACEMENT — — — — IHS6			
	LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD
	28 VDC	10 AMP (SEA LEVEL-100,000 FT)	25 AMP
	125 VAC	1 AMP (SEA LEVEL-100,000 FT)	1 AMP

SCALE FULL				
DO NOT SCALE PRINT				
TOLERANCES				
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED TOLERANCES ARE:				
	DIM. IN	TOL. IN	DIM. MM	TOL. MM
NO PLACES		17/04		
ONE PLACE	R, R	0.41/0.16		0.01/0.05
TWO PLACES	R, R, R	0.10/0.05		0.025/0.013
THREE PLACES			R, R, R	0.13/0.04
ANGLES				
DESIGN UNITS		☐ METRIC ☒ US CUSTOMARY		
THIRD ANGLE PROJECTION				
WEIGHT .58 LB				

RASTER
FO-8881-8

DRAWN

WJM 17 OCT 86