

(2,54 mm) .100"

TST, HTST, ZST SERIES

HTST-125-01-L-DV

SHROUDED .025" SQ POST IDC HEADERS

Mates with:
IDSD, SMSD

SPECIFICATIONS

For complete specifications
www.samtec.com?TST,
www.samtec.com?HTST or
www.samtec.com?ZST

Insulator Material:

Black Glass

Filled Polyester

(TST, ZST)

Natural PCT (HTST)

Insulation Resistance:

5000 MΩ min

Terminal Material:

Phosphor Bronze

Plating:

Au or Sn over

50μ" (1,27 μm) Ni

Current Rating:

3A per contact

Operating Temp Range:

-55°C to +125°C with Gold

-55°C to +105°C with Tin

Flammability Rating:

UL 94V-O

Withstanding Voltage:

1000 VRMS

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:

Yes (HTST)

Wave Only (TST, ZST)

SMT Lead Coplanarity:

(0,15 mm) .006"



TYPE STRIP

1

NO. PINS PER ROW

LEAD STYLE

PLATING OPTION

ROW OPTION

TST
= Cable StripHTST
= High Temp
Cable Strip

05, 07, 08, 10,
12, 13, 15, 17,
20, 25, 32, 36
(Call Samtec for other sizes.)

Specify
LEAD
STYLE
from
chart.

—F
= Gold flash on post,
Matte Tin on tail
(Not available on -DV)

—L
= 10μ" (0,25 μm)
Gold on post,
Matte Tin on tail


—T
= Matte Tin

—D
= Double Row
Through-hole
(lead style -01,
-02 & -03 only)



—DV
= Double Row
Surface Mount
(lead style
-01 only)
(HTST only)

—D-RA
= Double Row
Right Angle
(lead style -04
& -05 only)

LEAD STYLE	T/H (A)
-01	(2,92) .115
-02	(4,19) .165
-03	(14,35) .565

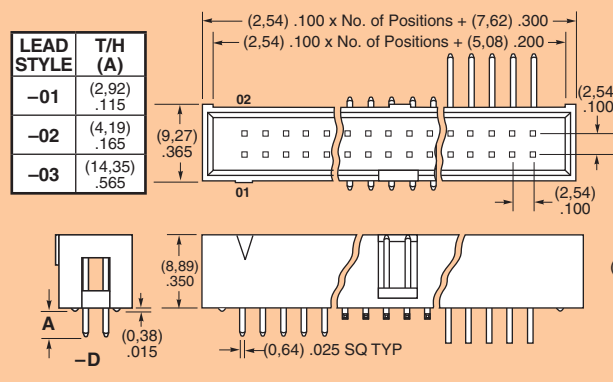

LEAD STYLE	RIGHT ANGLE (B)
-04	(3,30) .130
-05	(5,84) .230



ALSO AVAILABLE

Shrouded board-to-board headers and stackers to mate with SSW, SSQ, ESW, ESQ, SSM and BCS Series. See TSS, HTSS and ZSS Series.

APPLICATION SPECIFIC OPTION

- Alignment Pins
 - Single Row
 - Locking Leads
 - Polarized
- Call Samtec.

Note: Other Gold plating options available. Contact Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable. ZST is non-standard, non-returnable.

ZST

1

NO. PINS PER ROW

LEAD STYLE

PLATING OPTION

D

BODY HEIGHT

05, 07, 08, 10, 12, 13,
15, 17, 20, 25, 32, 36
(Call Samtec for other sizes.)



Specify
LEAD
STYLE
from
chart.

—F
= Gold flash on post,
Matte Tin on tail

—L
= 10μ" (0,25 μm)
Gold on post,
Matte Tin on tail

—T
= Matte Tin

—“XXXX”
= Body Height

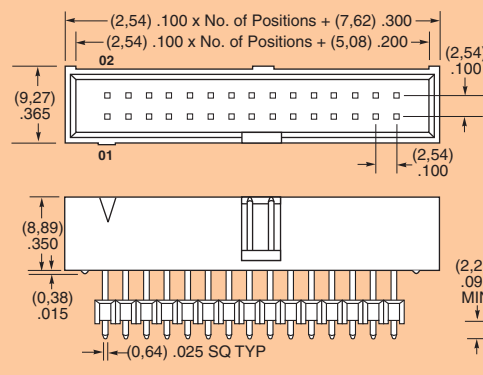

LEAD STYLE	C (OAL)	MAX BODY HEIGHT
-01	(16,00) .630	(13,72) .540
-02	(18,54) .730	(16,26) .640
-03	(21,08) .830	(18,80) .740
-04	(23,62) .930	(21,34) .840
-05	(26,16) 1.030	(23,88) .940
-06	(28,70) 1.130	(26,42) 1.040
-07	(31,24) 1.230	(28,96) 1.140
-08	(33,78) 1.330	(31,50) 1.240
-09	(36,32) 1.430	(34,04) 1.340

Note: For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683