


## Mounts

## Heavy Duty Mounts

The heavy duty mount, when used with a cable tie, eliminates the need to carry multiple sizes of fixed bundle diameter clamps, which reduces inventory and purchasing costs while simplifying the assembly process.

The heavy duty mount and cable tie combination makes it easy to service bundles in the field. Simply remove the cable tie, leave the mount in place, and replace the cable tie.

The heavy duty mounts are designed for use with HellermannTyton's heavy duty T250, T255, and wide strap cable ties to harness wires and hoses; however, they accept all standard cable ties up to .5" wide.

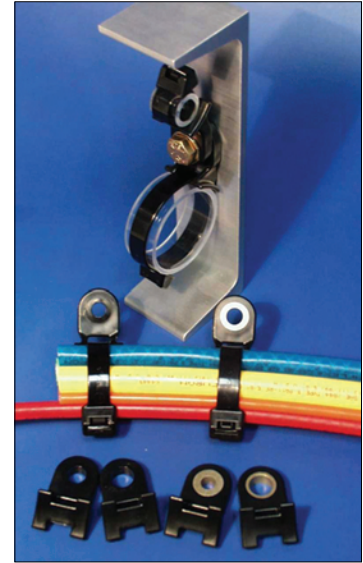

U.S. Patent Number 5,820,083

| Material Data         |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Material              | Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS) |
| Operating Temperature | -40 °F to +230 °F (-40 °C to +110 °C) continuous                         |
| Flammability          | UL94 HB                                                                  |




## Standard Torque Mounts

These mounts contain a small tab inside the mounting hole to temporarily engage the threads, which allows assemblers to pre-install the mount on a stud before securing with a washer and a nut.

| Product Selection |                     |        |             |               |                         |               |             |       |           |
|-------------------|---------------------|--------|-------------|---------------|-------------------------|---------------|-------------|-------|-----------|
| Article No.       | Part No.            | Type   | Mounting    | Max Torque    | Max Ø for Washer/Socket | Length (L)    | Width (W)   | Color | Pkg. Qty. |
|                   |                     |        | in. (mm)    | lb. - in      | in. (mm)                | in. (mm)      | in. (mm)    |       |           |
| 151-00134         | <b>HDM190HIRC2</b>  | HDM19  | .1875 (4.8) | 115 lb. - in. | .73" (18.5)             | 1.43" (36.32) | .76" (19.3) | Black | 100       |
| 151-00436         | <b>HDM190HIRH4</b>  | HDM19  | .1875 (4.8) | 115 lb. - in. | .73" (18.5)             | 1.43" (36.32) | .76" (19.3) | Black | 500       |
| 151-00437         | <b>HDM250HIRC2</b>  | HDM25  | .25" (6.4)  | 115 lb. - in. | .73" (18.5)             | 1.43" (36.32) | .76" (19.3) | Black | 100       |
| 151-00438         | <b>HDM250HIRH4</b>  | HDM25  | .25" (6.4)  | 115 lb. - in. | .73" (18.5)             | 1.43" (36.32) | .76" (19.3) | Black | 500       |
| 151-00439         | <b>HDM3120HIRC2</b> | HDM312 | .3125" (8)  | 115 lb. - in. | .73" (18.5)             | 1.43" (36.32) | .76" (19.3) | Black | 100       |
| 151-00440         | <b>HDM3120HIRH4</b> | HDM312 | .3125" (8)  | 115 lb. - in. | .73" (18.5)             | 1.43" (36.32) | .76" (19.3) | Black | 500       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.




## Medium Torque Mounts

The arched "H" profile of the saddle surface allows for a broad surface contact with the bundle, minimizing pinching and crushing of the bundles, and adjusts to a wide variety of bundle diameters.

| Product Selection |                       |        |             |              |                         |            |           |       |           |
|-------------------|-----------------------|--------|-------------|--------------|-------------------------|------------|-----------|-------|-----------|
| Article No.       | Part No.              | Type   | Mounting    | Max Torque   | Max Ø for Washer/Socket | Length (L) | Width (W) | Color | Pkg. Qty. |
|                   |                       |        | in. (mm)    | lb. - ft.    | in. (mm)                | in. (mm)   | in. (mm)  |       |           |
| 151-00441         | <b>HDM321HIHSUVC2</b> | HDM321 | .3125" (8)  | 40 lb. - ft. | .90" (23)               | 1.8" (46)  | .96" (24) | Black | 100       |
| 151-07100         | <b>HDM321HIHSUVH4</b> | HDM321 | .3125" (8)  | 40 lb. - ft. | .90" (23)               | 1.8" (46)  | .96" (24) | Black | 500       |
| 151-00442         | <b>HDM401HIHSUVC2</b> | HDM401 | .375" (9.5) | 40 lb. - ft. | .90" (23)               | 1.8" (46)  | .96" (24) | Black | 100       |
| 151-07300         | <b>HDM401HIHSUVH4</b> | HDM401 | .375" (9.5) | 40 lb. - ft. | .90" (23)               | 1.8" (46)  | .96" (24) | Black | 500       |
| 151-00443         | <b>HDM501HIHSUVC2</b> | HDM501 | .5" (12.7)  | 40 lb. - ft. | .90" (23)               | 1.8" (46)  | .96" (24) | Black | 100       |
| 151-07500         | <b>HDM501HIHSUVH4</b> | HDM501 | .5" (12.7)  | 40 lb. - ft. | .90" (23)               | 1.8" (46)  | .96" (24) | Black | 500       |


Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.



## Heavy Duty Mounts (*continued*)

### High Torque Mounts

The high torque mount is designed for use with power-assisted impact wrenches and is molded with a metal bushing to withstand the forces required to tighten grade 8 bolts. The arched "H" profile of the saddle surface allows for a broad surface contact with the bundle, minimizing pinching and crushing of bundles, and it adjusts to a wide variety of bundle diameters.




| Product Selection |                        |        |             |               |                         |            |           |       |           |
|-------------------|------------------------|--------|-------------|---------------|-------------------------|------------|-----------|-------|-----------|
| Article No.       | Part No.               | Type   | Mounting    | Max Torque    | Max Ø for Washer/Socket | Length (L) | Width (W) | Color | Pkg. Qty. |
|                   |                        |        | in. (mm)    | lb. - ft.     | in. (mm)                | in. (mm)   | in. (mm)  |       |           |
| 151-00444         | <b>HDM320BHIHSUVC2</b> | HDM320 | .3125" (8)  | 114 lb. - ft. | .9" (23)                | 1.85" (47) | .99" (25) | Black | 100       |
| 151-07000         | <b>HDM320BHIHSUVH4</b> | HDM320 | .3125" (8)  | 114 lb. - ft. | .9" (23)                | 1.85" (47) | .99" (25) | Black | 500       |
| 151-00445         | <b>HDM400BHISHUVC2</b> | HDM400 | .375" (9.5) | 114 lb. - ft. | 1.26" (32)              | 1.85" (47) | .99" (25) | Black | 100       |
| 151-07200         | <b>HDM400BHIHSUVH4</b> | HDM400 | .375" (9.5) | 114 lb. - ft. | 1.26" (32)              | 1.85" (47) | .99" (25) | Black | 500       |
| 151-00446         | <b>HDM500BHIHSUVC2</b> | HDM500 | .5" (12.7)  | 114 lb. - ft. | 1.26" (32)              | 1.85" (47) | .99" (25) | Black | 100       |
| 151-07400         | <b>HDM500BHIHSUVH4</b> | HDM500 | .5" (12.7)  | 114 lb. - ft. | 1.26" (32)              | 1.85" (47) | .99" (25) | Black | 500       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

### High Torque Double Mount

This mount is designed for use with power-assisted impact wrenches and is molded with a metal bushing to withstand the forces required to tighten grade 8 bolts. The high torque double mount secures the bundle directly over the mounting fastener. The cable ties are held in place during assembly with friction tabs inside the cable tie slots. The arched "H" profile of the saddle surface allows for a broad surface contact with the bundle, minimizing pinching and crushing of the bundles, and accommodates a wide variety of bundle diameters.





| Product Selection |                  |        |             |               |                         |            |              |       |           |
|-------------------|------------------|--------|-------------|---------------|-------------------------|------------|--------------|-------|-----------|
| Article No.       | Part No.         | Type   | Mounting    | Max Torque    | Max Ø for Washer/Socket | Length (L) | Width (W)    | Color | Pkg. Qty. |
|                   |                  |        | in. (mm)    | lb. - ft.     | in. (mm)                | in. (mm)   | in. (mm)     |       |           |
| 151-00456         | <b>151-00456</b> | HDM375 | .375" (9.5) | 114 lb. - ft. | 1.27" (32.5)            | 3.43" (87) | 1.36" (34.5) | Black | 100       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Mounts

## Weld Stud Mount

Used in conjunction with a cable tie, the weld stud mount eliminates all sizes of p-clamps, nuts, and bolts. Designed to significantly save time and labor, the weld stud mount can be welded onto a painted frame rail without having to grind the surface in preparation. Contact HellermannTyton for information on suitable welding equipment for this product.



## Material Data

|                       |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Material              | Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS) |
| Operating Temperature | -40 °F to +230 °F (-40 °C to +110 °C) continuous                         |
| Flammability          | UL94 HB                                                                  |



## Product Selection


| Article No. | Part No.      | Type  | Cable Tie Series | Max Bundle Ø | Stud Ø   | Length (L)   | Width (W)    | Height (H) | Color | Pkg. Qty. |
|-------------|---------------|-------|------------------|--------------|----------|--------------|--------------|------------|-------|-----------|
|             |               |       |                  | in. (mm)     | in. (mm) | in. (mm)     | in. (mm)     | in. (mm)   |       |           |
| 151-00146   | WSM60IMHSUVH1 | WSM60 | T50 - T250       | 6" (152.4)   | .24" (6) | 1.32" (33.5) | 1.07" (27.2) | 1.06" (27) | Black | 500       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Saddle Mount for the Button Head Tie

Designed to be used with HellermannTyton's button head ties, the saddle mount stands off bundles from frame rails, providing clearance from bolts and other protrusions for protection against abrasion. This mount also allows the flow-through of salt, dirt and other impurities from the road, preventing unwanted build-up on hoses and harnesses. The tie is snapped into the mount which allows the strap and tie assembly to be pre-installed on the frame rail or panel. The mount can secure three separate bundles, providing parallel spacing between the frame rail and adjacent bundles. The saddle mount is manufactured with a pilot bushing which prevents the cable tie from chafing against the burr edge of the mounting hole.

**This product for use with the button head tie on p. 34**

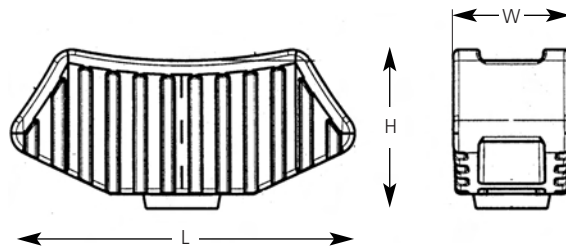

| Material Data         |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Material              | Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS) |
| Operating Temperature | -40 °F to +230 °F (-40 °C to +110 °C) continuous                         |
| Flammability          | UL94 HB                                                                  |



| Product Selection |                        |         | Mounting Hole Ø                  | Panel Thickness                | Standoff Height  | Length (L)      | Width (W)      | Height (H)     | Max Bundle Ø    |                                                                         | Color | Pkg. Qty. |
|-------------------|------------------------|---------|----------------------------------|--------------------------------|------------------|-----------------|----------------|----------------|-----------------|-------------------------------------------------------------------------|-------|-----------|
| Article No.       | Part No.               | Type    | in. (mm)                         | in. (mm)                       | in. (mm)         | in. (mm)        | in. (mm)       | in. (mm)       | Center in. (mm) | Sides in. (mm)                                                          |       |           |
| 151-29301         | <b>MSBT1200HIRHSH1</b> | MSBT120 | .440" - .820"<br>(11.18 - 20.83) | .160" - .75"<br>(4.06 - 19.05) | .875"<br>(22.23) | 1.90"<br>(48.3) | .65"<br>(16.5) | .81"<br>(20.6) | 6.0"<br>(152.4) | 1.0"<br>(25.4)<br><small>(dependent upon size of center bundle)</small> | Black | 500       |


Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Mounts

## Two Way Saddle Mounts


This saddle mount is installed between two bundles (such as wires, cables, hoses, tubing, conduit, etc.) to separate them and prevent chafing and wear. Fastened to a frame rail or mounting bracket, the "H" profile on the saddle mount provides a tight circumferential loop on large and small bundles. Cable ties, which secure the bundles, are used with the mount. The two way saddle mount accommodates cable ties up to 1/2" wide.

| Material Data         |                                                                                 |  |
|-----------------------|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Material              | <b>Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS)</b> |                                                                                   |
| Operating Temperature | <b>-40 °F to +230 °F (-40 °C to +110 °C) continuous</b>                         |                                                                                   |
| Flammability          | <b>UL94 HB</b>                                                                  |                                                                                   |

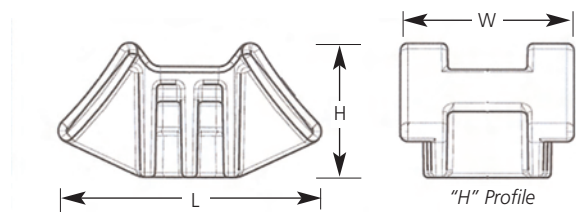

## S2HM25

The hexagonal retention feature captures a bolt or nut requiring tool access from back side only.




| Product Selection |                |        | Cable Tie Series | Max Bundle Ø (each side) | Stud Ø      | Length (L)   | Width (W)    | Height (H)  | Color | Pkg. Qty. |
|-------------------|----------------|--------|------------------|--------------------------|-------------|--------------|--------------|-------------|-------|-----------|
| Article No.       | Part No.       | Type   |                  | in. (mm)                 | in. (mm)    | in. (mm)     | in. (mm)     | in. (mm)    |       |           |
| 151-29403         | S2HM250HIRHSH1 | S2HM25 | T50 - T250       | 3.5" (89)                | .25" (6.35) | 1.76" (44.8) | 1.17" (29.7) | .90" (22.9) | Black | 500       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## S2CM25

A socket counterbore allows securing with a socket wrench from the top side for use with a weld stud or bolt.






| Product Selection |                |        | Cable Tie Series | Max Bundle Ø (each side) | Stud Ø      | Length (L)   | Width (W)    | Height (H)  | Color | Pkg. Qty. |
|-------------------|----------------|--------|------------------|--------------------------|-------------|--------------|--------------|-------------|-------|-----------|
| Article No.       | Part No.       | Type   |                  | in. (mm)                 | in. (mm)    | in. (mm)     | in. (mm)     | in. (mm)    |       |           |
| 151-29400         | S2CM258HIRHSH1 | S2CM25 | T50 - T250       | 3.5" (89)                | .25" (6.35) | 1.76" (44.8) | 1.17" (29.7) | .90" (22.9) | Gray  | 500       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Axial Oval Mounts

HellermannTyton's axial oval mounts stand off bundles from frame rails and cross members to prevent them from rubbing and chafing. The axial oval mount accommodates cable ties up to .5" wide.

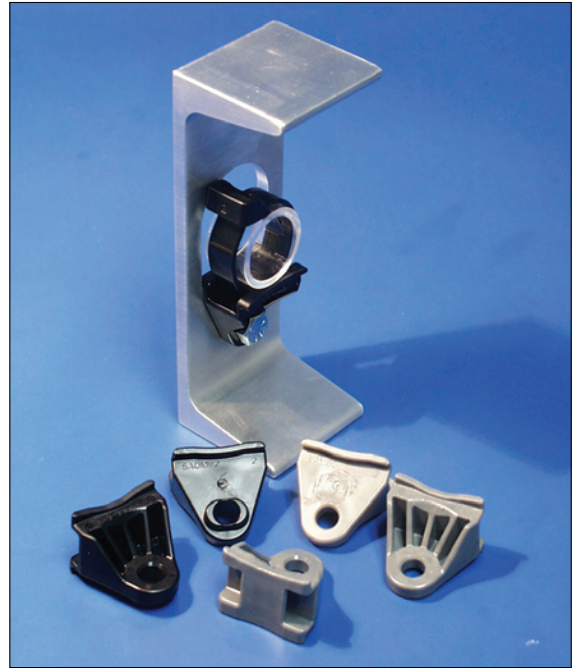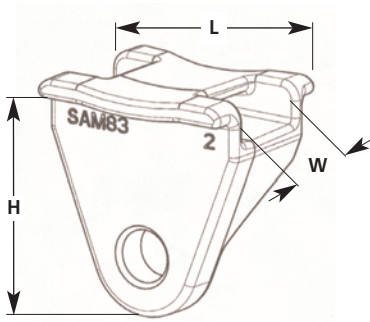

### Material Data

|                       |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Material              | Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS) |
| Operating Temperature | -40 °F to +230 °F (-40 °C to +110 °C)<br>continuous                      |
| Flammability          | UL94 HB                                                                  |



### Product Selection

| Article No. | Part No.       | Type   | Cable Tie Series | Bolt Hole Ø | Offset Distance from Mounting Slot | Length (L)   | Width (W)    | Height (H)   | Color | Pkg. Qty. |
|-------------|----------------|--------|------------------|-------------|------------------------------------|--------------|--------------|--------------|-------|-----------|
|             |                |        |                  | in. (mm)    | in. (mm)                           | in. (mm)     | in. (mm)     | in. (mm)     |       |           |
| 151-29600   | SAM83HIRHSH1   | SAM83  | T50 - T250       | 5/16" (8)   | .78" (19.8)                        | 1.35" (34.3) | 1.02" (25.9) | 1.39" (35.3) | Gray  | 500       |
| 151-29701   | SAOM820HIRHSH1 | SAOM82 | T50 - T250       | 5/16" (8)   | .78" (19.8)                        | 1.35" (34.3) | 1.02" (25.9) | 1.39" (35.3) | Black | 500       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

# Mounts


## Fir Tree Saddle Mounts

The fir tree saddle mount is designed for use with HellermannTyton cable ties up to 1/2" wide. The saddle mounts act as a standoff, elevating bundles above bolt protrusions commonly found in frame rails and panels. A tension tab on the mount allows cable ties to be pre-assembled in a ready position prior to bundles being brought to the mount. The mount can secure up to 4 separate bundles, providing parallel spacing between the frame rail and adjacent bundles.

| Material Data         |  |                                                                                 |
|-----------------------|--|---------------------------------------------------------------------------------|
| Material              |  | <b>Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS)</b> |
| Operating Temperature |  | <b>-40 °F to +230 °F (-40 °C to +110 °C) continuous</b>                         |
| Flammability          |  | <b>UL94 HB</b>                                                                  |



Patents Pending

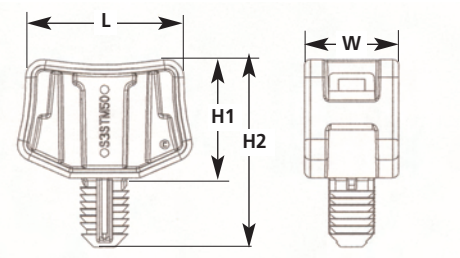


| Product Selection |                        |         | Mounting Hole Ø | Panel Thickness              | Extraction Force | Length (L)    | Width (W)    | Height (H1)   | Height (H2)   | Max Bundle Ø |              | Color | Pkg. Qty. |
|-------------------|------------------------|---------|-----------------|------------------------------|------------------|---------------|--------------|---------------|---------------|--------------|--------------|-------|-----------|
| Article No.       | Part No.               | Type    |                 |                              |                  |               |              |               |               | Center in.   | Sides in.    |       |           |
|                   |                        |         | in. (mm)        | in. (mm)                     | lbs.             | in. (mm)      | in. (mm)     | in. (mm)      | in. (mm)      | in. (mm)     | in. (mm)     |       |           |
| 151-29500         | <b>S3STM500HIRHSC2</b> | S3STM50 | .50" (12.70)    | .075" - .515" (1.91 - 13.08) | >200             | 1.98" (50.29) | .86" (21.84) | 1.36" (34.54) | 2.16" (54.86) | 5.0" (127.0) | 5.0" (127.0) | Black | 100       |
| 151-29501         | <b>S3STM500HIRHSF1</b> | S3STM50 | .50" (12.70)    | .075" - .515" (1.91 - 13.08) | >200             | 1.98" (50.29) | .86" (21.84) | 1.36" (34.54) | 2.16" (54.86) | 5.0" (127.0) | 5.0" (127.0) | Black | 250       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Tape Clips

Tape clips are designed to provide simple and easy methods of securing cable bundles, hoses, or pipes. They are fastened onto the tape bar using tape or cable ties. The different fixing orientations allow tape clips to be used with a wide range of panel thicknesses and hole diameters. Standard tape clips are available as well as standoff and stud mount versions.

| Material Data         |                                                            |
|-----------------------|------------------------------------------------------------|
| Material              | <b>Polyamide 6.6 (PA66)</b>                                |
| Operating Temperature | <b>-40 °F to +185 °F<br/>(-40 °C to +85 °C) continuous</b> |
| Flammability          | <b>UL94 V2</b>                                             |

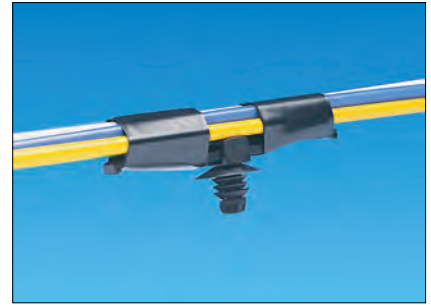

| Material Data         |                                                                                 |
|-----------------------|---------------------------------------------------------------------------------|
| Material              | <b>Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS)</b> |
| Operating Temperature | <b>-40 °F to +230 °F (-40 °C to +110 °C) continuous</b>                         |
| Flammability          | <b>UL94 HB</b>                                                                  |



| Material Data         |                                                         |
|-----------------------|---------------------------------------------------------|
| Material              | <b>Polyamide 6.6 impact modified (PA66HIR)</b>          |
| Color                 | <b>Black</b>                                            |
| Operating Temperature | <b>-40 °F to +230 °F (-40 °C to +110 °C) continuous</b> |
| Flammability          | <b>UL94 HB</b>                                          |



## Standard Tape Clips

Standard tape clips secure the bundle directly above the mounting hole.




| Product Selection |                  |          |                     |                         |                         |                                   |           |       |           |         |
|-------------------|------------------|----------|---------------------|-------------------------|-------------------------|-----------------------------------|-----------|-------|-----------|---------|
| Article No.       | Part No.         | Type     | Tape Bar Length (L) | Panel Thickness Minimum | Panel Thickness Maximum | Mounting Hole Ø                   | Material  | Color | Pkg. Qty. | Drawing |
|                   |                  |          | in. (mm)            | in. (mm)                | in. (mm)                | in. (mm)                          |           |       |           |         |
| 155-30802         | <b>155-30802</b> | TC2FT6LG | 2.17" (55)          | .02" (0.6)              | .2" (5.1)               | .25 - .28" (6.4 - 7.1)            | PA66HIRHS | Black | 500       |         |
| 150-95500         | <b>150-95500</b> | TC5FT6S  | 1.46" (37)          | .03" (0.75)             | .06" (1.5)              | .26 - .28" (6.5 - 7.0)            | PA66HIRHS | Black | 1000      |         |
| 151-02901         | <b>151-02901</b> | CHA2     | 2.13" (54)          | .03" (0.8)              | .08" (2)                | .28" (7.0)                        | PA66      | Black | 500       |         |
| 150-07010         | <b>150-07010</b> | CHDP66   | 1.57" (40)          | .03" (0.8)              | .18" (4.5)              | .26" (6.6)                        | PA66      | Black | 500       |         |
| 155-16301         | <b>155-16301</b> | CLIP     | 1.57" (40)          | .02" (0.6)              | .1" (2.5)               | .39 X .25 - .26" (10 X 6.3 - 6.7) | PA66HIRHS | Black | 1000      |         |
| 151-07900         | <b>151-07900</b> | CLIP     | 3.15" (80)          | .02" (0.6)              | .1" (2.5)               | .39 X .25 - .26" (10 X 6.3 - 6.7) | PA66HIRHS | Black | 500       |         |
| 155-11601         | <b>155-11601</b> | CLIP     | 2.17" (55)          | .06" (1.5)              | .12" (3.0)              | .26" (6.5)                        | PA66HIRHS | Black | 500       |         |
| 150-08110         | <b>150-08110</b> | CHA1     | 2.13" (54)          | .02" (0.5)              | .05" (1.2)              | .25 - .28" (6.3 - 7.0)            | PA66      | Black | 500       |         |
| 150-50197         | <b>150-50197</b> | CHA 1.5  | 2.13" (54)          | .02" (0.5)              | .05" (1.2)              | .25 - .28" (6.3 - 7.0)            | PA66      | Green | 500       |         |
| 151-08101         | <b>151-08101</b> | LRJ1     | 2.17" (55)          | .03" (0.7)              | .08" (2.0)              | .24 - .26" (6.2 - 6.7)            | PA66      | Black | 500       |         |
| 150-50698         | <b>150-50698</b> | CLIP     | 1.46" (37)          | n/a                     | n/a                     | n/a                               | PA66HIR   | Black | 500       |         |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

Tape Clips (*continued*)

## Standoff Tape Clips

Standoff tape clips secure the bundle away from the mounting hole.

| Product Selection |                  |                |                     |      |                         |       |                         |       |                         |        |                                                                                       |
|-------------------|------------------|----------------|---------------------|------|-------------------------|-------|-------------------------|-------|-------------------------|--------|---------------------------------------------------------------------------------------|
| Article No.       | Part No.         | Type           | Tape Bar Length (L) |      | Panel Thickness Minimum |       | Panel Thickness Maximum |       | Distance Hole to Bundle |        | Drawing                                                                               |
|                   |                  |                | in.                 | (mm) | in.                     | (mm)  | in.                     | (mm)  | in.                     | (mm)   |                                                                                       |
| 151-00623         | <b>151-00623</b> | SOCH FT6       | 2.2"                | (56) | .03"                    | (0.7) | .216"                   | (5.5) | 1.2"                    | (31)   |    |
| 151-00629         | <b>151-00629</b> | SOC7 FT6       | 2.2"                | (56) | .03"                    | (0.7) | .216"                   | (5.5) | 1.2"                    | (31)   |    |
| 151-00650         | <b>151-00650</b> | SOC8FT6        | 2.4"                | (61) | .03"                    | (0.7) | .216"                   | (5.5) | .88"                    | (22.4) |    |
| 155-30902         | <b>155-30902</b> | SOC4 M.FT6     | 2.17"               | (55) | .03"                    | (0.7) | .2"                     | (5.1) | .79"                    | (20)   |    |
| 151-00074         | <b>151-00074</b> | SOC5 M.FT6     | 2.17"               | (55) | .03"                    | (0.7) | .2"                     | (5.1) | .51"                    | (13)   |    |
| 150-09201         | <b>150-09201</b> | COW20DP7       | 1.65"               | (42) | .03"                    | (0.8) | .18"                    | (4.5) | .79"                    | (20)   |   |
| 151-00080         | <b>151-00080</b> | COW30DP7       | 1.65"               | (42) | .03"                    | (0.8) | .18"                    | (4.5) | 1.2"                    | (30)   |  |
| 155-01600         | <b>155-01600</b> | STAND-OFF CLIP | 1.57"               | (40) | .02"                    | (0.4) | .06"                    | (1.6) | .98"                    | (25)   |  |
| 150-45397         | <b>150-45397</b> | STAND-OFF CLIP | 1.57"               | (40) | .02"                    | (0.4) | .06"                    | (1.6) | 1.2"                    | (31)   |  |
| 151-02600         | <b>151-02600</b> | CH20D7         | 1.97"               | (50) | .03"                    | (0.8) | .06"                    | (1.6) | .79"                    | (20)   |  |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Standoff Stud Mount Tape Clips


Standoff stud mount tape clips are easily inserted on a 5mm stud and secure the bundle away from the mounting hole.

| Product Selection |           |               |            |                            |              |                              |       |          |                                                                                       |           |         |
|-------------------|-----------|---------------|------------|----------------------------|--------------|------------------------------|-------|----------|---------------------------------------------------------------------------------------|-----------|---------|
| Article No.       | Part No.  | Tape Bar Type | Length (L) | Recommended Weld Stud Size |              | Distance Weld Stud to Bundle |       | Material | Color                                                                                 | Pkg. Qty. | Drawing |
|                   |           |               | in. (mm)   | in. (mm)                   | in. (mm)     | in. (mm)                     |       |          |                                                                                       |           |         |
| 151-26101         | 151-26101 | TCSB5C-SD     | 2.05" (52) | .2" (5)                    | .49" (12.5)  | PA66HS                       | Black | 500      |                                                                                       |           |         |
| 151-00017         | 151-00017 | Tape Bar      | 2.17" (55) | .2" (5)                    | .897" (22.8) | PA66HIRHS                    | Black | 500      |  |           |         |
| 151-00016         | 151-00016 | BC30          | 2.17" (55) | .2" (5)                    | 1.18" (30)   | PA66HIRHS                    | Black | 500      |  |           |         |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Mounting Cradle

The mounting cradle holds cables and harnesses secure yet clear of the panel surface. This cradle is for use with HellermannTyton cable ties.



| Material Data         |                                                            |
|-----------------------|------------------------------------------------------------|
| Material              | <b>Polyamide 6.6 (PA66)</b>                                |
| Operating Temperature | <b>-40 °F to +185 °F<br/>(-40 °C to +85 °C) continuous</b> |
| Flammability          | <b>UL94 V2 (excluding adhesive)</b>                        |




| Product Selection |           |        |                  |             |           |             |                 |         |           |
|-------------------|-----------|--------|------------------|-------------|-----------|-------------|-----------------|---------|-----------|
| Article No.       | Part No.  | Type   | Cable Tie Series | Length (L)  | Width (W) | Height (H)  | Mounting Hole Ø | Color   | Pkg. Qty. |
|                   |           |        |                  | in. (mm)    | in. (mm)  | in. (mm)    | in. (mm)        |         |           |
| 151-27010         | 151-27010 | LKC    | T50 - T250       | .98" (24.9) | .67" (17) | .53" (13.5) | .21" (8)        | Natural | 100       |
| 151-27019         | 151-27019 | LKC    | T50 - T250       | .98" (24.9) | .67" (17) | .53" (13.5) | .21" (8)        | Black   | 100       |
| 151-27219         | 151-27219 | LKCSF1 | T50 - T250       | 1.6" (40)   | .75" (19) | .66" (16.8) | .23" (6)        | Natural | 100       |
| 151-27202         | 151-27202 | LKCSF1 | T50 - T250       | 1.6" (40)   | .75" (19) | .66" (16.8) | .23" (6)        | Black   | 100       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Lashing Tie Mounts

The lashing tie mount is designed to snap into the T250 lashing tie. The tie head is assembled perpendicular to the mount. The strap is parallel to the mount when inserted into the head. The lashing tie mount is recommended for indoor or outdoor wall mount cable applications.

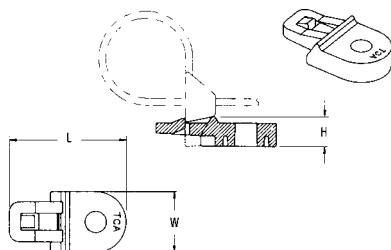

| Material Data         |                                                        |
|-----------------------|--------------------------------------------------------|
| Material              | <b>Polyamide 6.6 UV-resistant (PA66UV)</b>             |
| Operating Temperature | <b>-40 °F to +185 °F (-40 °C to +85 °C) continuous</b> |
| Flammability          | <b>UL94 V2</b>                                         |




| Product Selection |           |        |                  |            |               |               |              |       |           |
|-------------------|-----------|--------|------------------|------------|---------------|---------------|--------------|-------|-----------|
| Article No.       | Part No.  | Type   | Cable Tie Series | Mounting   | Width (W)     | Length (L)    | Height (H)   | Color | Pkg. Qty. |
|                   |           |        |                  |            | in. (mm)      | in. (mm)      | in. (mm)     |       |           |
| 151-00358         | LTM2500C2 | LTM250 | T250             | .25" screw | .733" (18.62) | 1.46" (37.08) | .378" (9.60) | Black | 100       |
| 151-00293         | LTM2500H4 | LTM250 |                  |            | .733" (18.62) | 1.46" (37.08) | .378" (9.60) | Black | 500       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Fir Tree Mount Tube Clip

Designed to offer a durable single-hole mounting, this tube clip allows the installer to insert the fir tree with minimal force while providing a secure hold.

| Material Data         |                                                                                 |
|-----------------------|---------------------------------------------------------------------------------|
| Material              | <b>Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS)</b> |
| Operating Temperature | <b>-40 °F to +230 °F (-40 °C to +110 °C) continuous</b>                         |
| Flammability          | <b>UL94 HB</b>                                                                  |

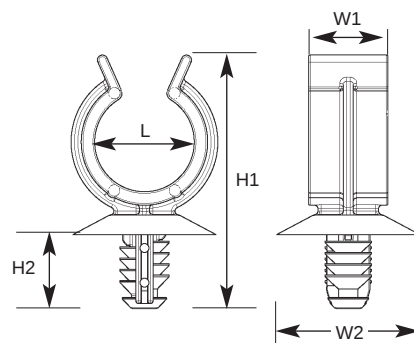

| Product Selection |          |         |                        |                |              |                |                |                                |                                |       |              |
|-------------------|----------|---------|------------------------|----------------|--------------|----------------|----------------|--------------------------------|--------------------------------|-------|--------------|
| Article No.       | Part No. | Type    | Dimensions<br>in. (mm) |                |              |                |                | Mounting<br>Hole Ø<br>in. (mm) | Panel<br>Thickness<br>in. (mm) | Color | Pkg.<br>Qty. |
|                   |          |         | H1                     | H2             | W1           | W2             | L              |                                |                                |       |              |
| 151-14303         | PC15FT7  | PC15FT7 | 1.07"<br>(27.1)        | .44"<br>(11.1) | .47"<br>(12) | .85"<br>(21.6) | .62"<br>(15.7) | .25"<br>(6.5)                  | .12"<br>(3.055)                | Black | 100          |


Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.




## Cable Guide Standoff

Secured with HellermannTyton's button head tie, the cable guide standoff elevates bundles above a frame rail protecting it from bolts or other protrusions.

| Material Data         |                                                                                 |
|-----------------------|---------------------------------------------------------------------------------|
| Material              | <b>Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS)</b> |
| Operating Temperature | <b>-40 °F to +230 °F (-40 °C to +110 °C) continuous</b>                         |
| Flammability          | <b>UL94 HB</b>                                                                  |

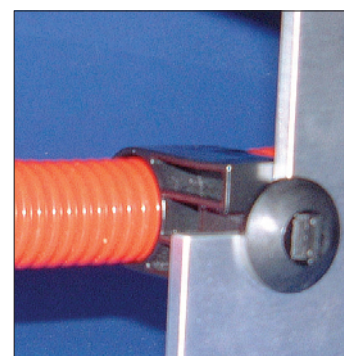

**This product for use with the button head tie on p. 34**

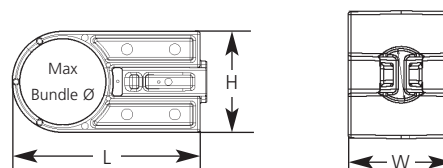


| Product Selection |           |      |                 |                 |                 |                 |       |              |
|-------------------|-----------|------|-----------------|-----------------|-----------------|-----------------|-------|--------------|
| Article No.       | Part No.  | Type | Max<br>Bundle Ø | Length<br>(L)   | Width<br>(W)    | Height<br>(H)   | Color | Pkg.<br>Qty. |
|                   |           |      | in.<br>(mm)     | in.<br>(mm)     | in.<br>(mm)     | in.<br>(mm)     |       |              |
| 151-00006         | 151-00006 | CGS1 | 1.02"<br>(25.9) | 2.23"<br>(56.6) | 1.00"<br>(25.4) | 1.20"<br>(30.5) | Black | 250          |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.


## Cable Tie Mounts

The CTM series is designed to provide stability to wire bundles. These mounts can accommodate miniature, intermediate, or standard cross-section cable ties. Each mount is secured with a single screw.

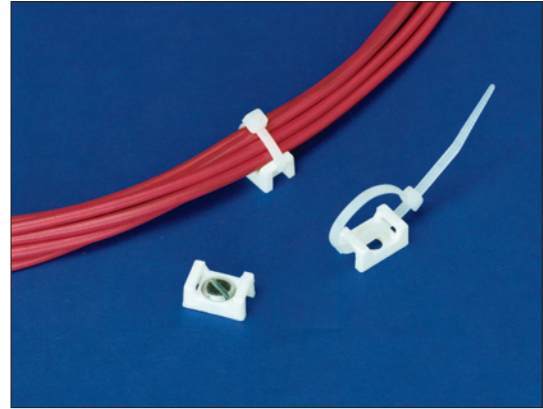

### Material Data

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| Material              | <b>Polyamide 6.6 (PA66)</b>                            |
| Operating Temperature | <b>-40 °F to +185 °F (-40 °C to +85 °C) continuous</b> |
| Flammability          | <b>UL94 V2</b>                                         |

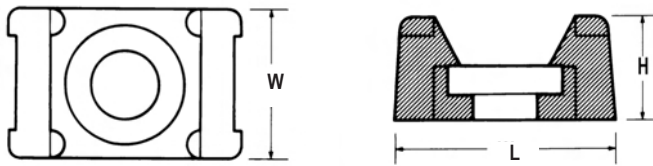

File# E64139

### Product Selection

| Product Selection |          |      |                  |            |               |               |               |              |           |      |
|-------------------|----------|------|------------------|------------|---------------|---------------|---------------|--------------|-----------|------|
| Article No.       | Part No. | Type | Cable Tie Series | Mounting   | Length (L)    | Width (W)     | Height (H)    | Color        | Pkg. Qty. |      |
|                   |          |      |                  |            | in. (mm)      | in. (mm)      | in. (mm)      |              |           |      |
| 151-30303         | CTM010C2 | CTM0 | T18 - T50        | # 6 Screw  | .578" (14.68) | .375" (9.52)  | .266" (6.76)  | White        | 100       |      |
| 151-30305         | CTM010M4 |      |                  |            | .578" (14.68) | .375" (9.52)  | .266" (6.76)  | White        | 1000      |      |
| 151-30300         | CTM00C2  |      |                  |            | .578" (14.68) | .375" (9.52)  | .266" (6.76)  | Black        | 100       |      |
| 151-30301         | CTM00M4  |      |                  |            | .578" (14.68) | .375" (9.52)  | .266" (6.76)  | Black        | 1000      |      |
| 151-30404         | CTM110C2 | CTM1 |                  | # 8 Screw  | .579" (14.71) | .370" (9.40)  | .266" (6.76)  | White        | 100       |      |
| 151-30406         | CTM110M4 |      |                  |            | .579" (14.71) | .370" (9.40)  | .266" (6.76)  | White        | 1000      |      |
| 151-30400         | CTM10C2  |      |                  |            | .579" (14.71) | .370" (9.40)  | .266" (6.76)  | Black        | 100       |      |
| 151-30402         | CTM10M4  |      |                  |            | .579" (14.71) | .370" (9.40)  | .266" (6.76)  | Black        | 1000      |      |
| 151-30504         | CTM210C2 | CTM2 | T18 -T120        |            | # 8 Screw     | .857" (21.77) | .605" (15.37) | .372" (9.45) | White     | 100  |
| 151-30506         | CTM210M4 |      |                  |            |               | .857" (21.77) | .605" (15.37) | .372" (9.45) | White     | 1000 |
| 151-30500         | CTM20C2  |      |                  |            |               | .857" (21.77) | .605" (15.37) | .372" (9.45) | Black     | 100  |
| 151-30501         | CTM20M4  |      |                  |            |               | .857" (21.77) | .605" (15.37) | .372" (9.45) | Black     | 1000 |
| 151-30605         | CTM310C2 | CTM3 |                  | #10 Screw  | .858" (21.79) | .609" (15.47) | .374" (9.50)  | White        | 100       |      |
| 151-30607         | CTM310M4 |      |                  |            | .858" (21.79) | .609" (15.47) | .374" (9.50)  | White        | 1000      |      |
| 151-30600         | CTM30C2  |      |                  |            | .858" (21.79) | .609" (15.47) | .374" (9.50)  | Black        | 100       |      |
| 151-30603         | CTM30M4  |      |                  |            | .858" (21.79) | .609" (15.47) | .374" (9.50)  | Black        | 1000      |      |
| 151-30703         | CTM410C2 | CTM4 |                  | .25" Screw | .864" (21.95) | .616" (15.65) | .372" (9.45)  | White        | 100       |      |
| 151-30705         | CTM410M4 |      |                  |            | .864" (21.95) | .616" (15.65) | .372" (9.45)  | White        | 1000      |      |
| 151-30700         | CTM40C2  |      |                  |            | .864" (21.95) | .616" (15.65) | .372" (9.45)  | Black        | 100       |      |
| 151-30702         | CTM40M4  |      |                  |            | .864" (21.95) | .616" (15.65) | .372" (9.45)  | Black        | 1000      |      |


Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Mounts

## Cable Tie Mounting Bases


HellermannTyton's 4-way mounting bases are available in four sizes to accommodate T18 through T150 series cable ties. Insertion of ties can be made from all four sides. Each mount may be secured with two screws (four screws for the MB2.5 mount), with adhesive backing, or both, for ease of application and stability.

For applications where higher temperatures, certain chemicals, or UV radiation are a concern and an adhesive is the preferred method for securing, the acrylic adhesive 4-way mounting bases are recommended. The 2-way mounting bases may be secured with one screw, with adhesive backing, or both, and allow ties to be inserted from two sides.

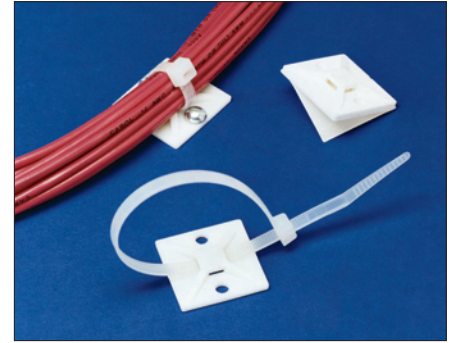


Adhesive mounts are supplied in pairs connected together on an adhesive liner.


| Material Data         |                                                            |
|-----------------------|------------------------------------------------------------|
| Material              | <b>Polyamide 6.6 (PA66)</b>                                |
| Operating Temperature | <b>-40 °F to +185 °F<br/>(-40 °C to +85 °C) continuous</b> |
| Flammability          | <b>UL94 V2 (excluding adhesive)</b>                        |



4-way, MB3, MB4 and MB5 mounts



2-way mount



4-way, MB2.5 mount


## Cable Tie Mounting Bases - Screw Mount

**CT** US  
File# E64139


| Product Selection  |           |       |                  | Mounting  | Length (L)     |                | Width (W)    |       | Height (H) |      | Color | Pkg. Qty. |
|--------------------|-----------|-------|------------------|-----------|----------------|----------------|--------------|-------|------------|------|-------|-----------|
| Article No.        | Part No.  | Type  | Cable Tie Series |           | in.            | (mm)           | in.          | (mm)  | in.        | (mm) |       |           |
|                    |           |       |                  |           |                |                |              |       |            |      |       |           |
| 2- Way Screw Mount |           |       |                  |           |                |                |              |       |            |      |       |           |
| 151-29104          | MB45H10C2 | MB45H | T18 - T50        | # 6 Screw | 1.115" (28.32) | 1.115" (28.32) | .202" (5.13) | White | 100        |      |       |           |
| 151-00323          | MB45H10H4 | MB45H |                  |           | 1.115" (28.32) | 1.115" (28.32) | .202" (5.13) | White | 500        |      |       |           |
| 151-29100          | MB45H0C2  | MB45H |                  |           | 1.115" (28.32) | 1.115" (28.32) | .202" (5.13) | Black | 100        |      |       |           |
| 151-29101          | MB45H0H4  | MB45H |                  |           | 1.115" (28.32) | 1.115" (28.32) | .202" (5.13) | Black | 500        |      |       |           |
| 4- Way Screw Mount |           |       |                  |           |                |                |              |       |            |      |       |           |
| 151-28901          | MB2.510C2 | MB2.5 | T18              | # 3 Screw | .625" (15.88)  | .625" (15.88)  | .130" (3.3)  | White | 100        |      |       |           |
| 151-28902          | MB2.510M4 | MB2.5 |                  |           | .625" (15.88)  | .625" (15.88)  | .130" (3.3)  | White | 1000       |      |       |           |
| 151-00285          | MB2.50C2  | MB2.5 |                  |           | .625" (15.88)  | .625" (15.88)  | .130" (3.3)  | Black | 100        |      |       |           |
| 151-00286          | MB2.50M4  | MB2.5 |                  |           | .625" (15.88)  | .625" (15.88)  | .130" (3.3)  | Black | 1000       |      |       |           |
| 151-28302          | MB310C2   | MB3   | T18, T30         | #4 Screw  | .75" (19.0)    | .75" (19.0)    | .15" (3.8)   | White | 100        |      |       |           |
| 151-28305          | MB310M4   | MB3   |                  |           | .75" (19.0)    | .75" (19.0)    | .15" (3.8)   | White | 1000       |      |       |           |
| 151-00136          | MB30C2    | MB3   |                  |           | .75" (19.0)    | .75" (19.0)    | .15" (3.8)   | Black | 100        |      |       |           |
| 151-28301          | MB30M4    | MB3   |                  |           | .75" (19.0)    | .75" (19.0)    | .15" (3.8)   | Black | 1000       |      |       |           |
| 151-28802          | MB410C2   | MB4   | T18 - T50        | #8 Screw  | 1.12" (28.5)   | 1.12" (28.5)   | .19" (4.8)   | White | 100        |      |       |           |
| 151-00319          | MB410H4   | MB4   |                  |           | 1.12" (28.5)   | 1.12" (28.5)   | .19" (4.8)   | White | 500        |      |       |           |
| 151-00320          | MB40C2    | MB4   |                  |           | 1.12" (28.5)   | 1.12" (28.5)   | .19" (4.8)   | Black | 100        |      |       |           |
| 151-28801          | MB40H4    | MB4   |                  |           | 1.12" (28.5)   | 1.12" (28.5)   | .19" (4.8)   | Black | 500        |      |       |           |
| 151-00324          | MB510C2   | MB5   | T18 - T150       | #8 Screw  | 1.485" (37.7)  | 1.485" (37.7)  | .245" (6.2)  | White | 100        |      |       |           |
| 151-28504          | MB510F4   | MB5   |                  |           | 1.485" (37.7)  | 1.485" (37.7)  | .245" (6.2)  | White | 250        |      |       |           |
| 151-28500          | MB50C2    | MB5   |                  |           | 1.485" (37.7)  | 1.485" (37.7)  | .245" (6.2)  | Black | 100        |      |       |           |
| 151-28501          | MB50F4    | MB5   |                  |           | 1.485" (37.7)  | 1.485" (37.7)  | .245" (6.2)  | Black | 250        |      |       |           |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.


## Cable Tie Mounting Bases (continued)

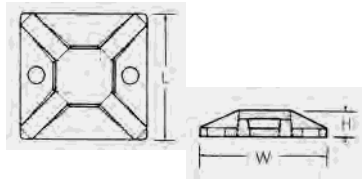

4-way, MB3, MB4 and MB5 mounts



2-way mount

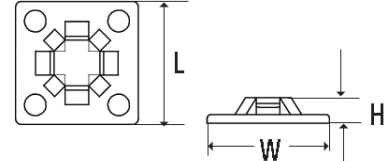

4-way, MB2.5 mount

## Cable Tie Mounting Bases - Rubber-Based Adhesive



File# E64139

| Product Selection                         |            |        |                  |          |                |                |              |       |           |
|-------------------------------------------|------------|--------|------------------|----------|----------------|----------------|--------------|-------|-----------|
| Article No.                               | Part No.   | Type   | Cable Tie Series | Mounting | Length (L)     | Width (W)      | Height (H)   | Color | Pkg. Qty. |
|                                           |            |        |                  |          | in. (mm)       | in. (mm)       | in. (mm)     |       |           |
| 2- Way Mount with Rubber - Based Adhesive |            |        |                  |          |                |                |              |       |           |
| 151-29203                                 | MB4SHA10C2 | MB4SHA | T18 - T50        | Adhesive | 1.115" (28.32) | 1.115" (28.32) | .232" (5.89) | White | 100       |
| 151-29206                                 | MB4SHA10H4 | MB4SHA |                  |          | 1.115" (28.32) | 1.115" (28.32) | .232" (5.89) | White | 500       |
| 151-29200                                 | MB4SHA0C2  | MB4SHA |                  |          | 1.115" (28.32) | 1.115" (28.32) | .232" (5.89) | Black | 100       |
| 4- Way Mount with Rubber - Based Adhesive |            |        |                  |          |                |                |              |       |           |
| 151-29002                                 | MB2.5A10C2 | MB2.5A | T18              | Adhesive | .625" (15.88)  | .625" (15.88)  | .160" (4.1)  | White | 100       |
| 151-00298                                 | MB2.5A10M4 | MB2.5A |                  |          | .625" (15.88)  | .625" (15.88)  | .160" (4.1)  | White | 1000      |
| 151-29000                                 | MB2.5A0C2  | MB2.5A |                  |          | .625" (15.88)  | .625" (15.88)  | .160" (4.1)  | Black | 100       |
| 151-29001                                 | MB2.5A0M4  | MB2.5A |                  |          | .625" (15.88)  | .625" (15.88)  | .160" (4.1)  | Black | 1000      |
| 151-28718                                 | MB3A10C2   | MB3A   | T18, T30         | Adhesive | .75" (19.0)    | .75" (19.0)    | .18" (4.6)   | White | 100       |
| 151-28721                                 | MB3A10M4   | MB3A   |                  |          | .75" (19.0)    | .75" (19.0)    | .18" (4.6)   | White | 1000      |
| 151-28710                                 | MB3A0C2    | MB3A   |                  |          | .75" (19.0)    | .75" (19.0)    | .18" (4.6)   | Black | 100       |
| 151-28713                                 | MB3A0M4    | MB3A   |                  |          | .75" (19.0)    | .75" (19.0)    | .18" (4.6)   | Black | 1000      |
| 151-28421                                 | MB4A10C2   | MB4A   | T18 - T50        | Adhesive | 1.12" (28.0)   | 1.12" (28.0)   | .22" (5.6)   | White | 100       |
| 151-00321                                 | MB4A10H4   | MB4A   |                  |          | 1.12" (28.0)   | 1.12" (28.0)   | .22" (5.6)   | White | 500       |
| 151-28403                                 | MB4A0C2    | MB4A   |                  |          | 1.12" (28.0)   | 1.12" (28.0)   | .22" (5.6)   | Black | 100       |
| 151-28406                                 | MB4A0H4    | MB4A   |                  |          | 1.12" (28.0)   | 1.12" (28.0)   | .22" (5.6)   | Black | 500       |
| 151-28529                                 | MB5A10C2   | MB5A   | T18 - T150       | Adhesive | 1.485" (37.7)  | 1.485" (37.7)  | .275" (6.9)  | White | 100       |
| 151-00427                                 | MB5A10F4   | MB5A   |                  |          | 1.485" (37.7)  | 1.485" (37.7)  | .275" (6.9)  | White | 250       |
| 151-28602                                 | MB5A0C2    | MB5A   |                  |          | 1.485" (37.7)  | 1.485" (37.7)  | .275" (6.9)  | Black | 100       |
| 151-28605                                 | MB5A0F4    | MB5A   |                  |          | 1.485" (37.7)  | 1.485" (37.7)  | .275" (6.9)  | Black | 250       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

## Cable Tie Mounting Bases - Acrylic Adhesive

| Product Selection                    |            |      |                  |          |               |  |               |  |             |  |       |           |
|--------------------------------------|------------|------|------------------|----------|---------------|--|---------------|--|-------------|--|-------|-----------|
| Article No.                          | Part No.   | Type | Cable Tie Series | Mounting | Length (L)    |  | Width (W)     |  | Height (H)  |  | Color | Pkg. Qty. |
|                                      |            |      |                  |          | in. (mm)      |  | in. (mm)      |  | in. (mm)    |  |       |           |
| 4 - Way Screw Mount Acrylic Adhesive |            |      |                  |          |               |  |               |  |             |  |       |           |
| 151-00331                            | MB3A10A2C2 | MB3A | T18, T30         | Adhesive | .75" (19.0)   |  | .75" (19.0)   |  | .18" (4.6)  |  | White | 100       |
| 151-28717                            | MB3A10A2H4 | MB3A |                  |          | .75" (19.0)   |  | .75" (19.0)   |  | .18" (4.6)  |  | White | 500       |
| 151-28711                            | MB3A0A2C2  | MB3A |                  |          | .75" (19.0)   |  | .75" (19.0)   |  | .18" (4.6)  |  | Black | 100       |
| 151-28709                            | MB3A0A2H4  | MB3A |                  |          | .75" (19.0)   |  | .75" (19.0)   |  | .18" (4.6)  |  | Black | 500       |
| 151-28420                            | MB4A10A2C2 | MB4A | T18 - T50        | Adhesive | 1.12" (28.5)  |  | 1.12" (28.5)  |  | .23" (5.9)  |  | White | 100       |
| 151-00322                            | MB4A10A2H4 | MB4A |                  |          | 1.12" (28.5)  |  | 1.12" (28.5)  |  | .23" (5.9)  |  | White | 500       |
| 151-28402                            | MB4A0A2C2  | MB4A |                  |          | 1.12" (28.5)  |  | 1.12" (28.5)  |  | .23" (5.9)  |  | Black | 100       |
| 151-28405                            | MB4A0A2H4  | MB4A |                  |          | 1.12" (28.5)  |  | 1.12" (28.5)  |  | .23" (5.9)  |  | Black | 500       |
| 151-28607                            | MB5A10A2C2 | MB5A | T18 - T150       | Adhesive | 1.485" (37.7) |  | 1.485" (37.7) |  | .275" (6.9) |  | White | 100       |
| 151-28610                            | MB5A10A2F4 | MB5A |                  |          | 1.485" (37.7) |  | 1.485" (37.7) |  | .275" (6.9) |  | White | 250       |
| 151-28600                            | MB5A0A2C2  | MB5A |                  |          | 1.485" (37.7) |  | 1.485" (37.7) |  | .275" (6.9) |  | Black | 100       |
| 151-28604                            | MB5A0A2F4  | MB5A |                  |          | 1.485" (37.7) |  | 1.485" (37.7) |  | .275" (6.9) |  | Black | 250       |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.